MIL-M-8650C
AMENDMENT 2
7 April 1978
Superseding
MIL-M-8650C
AMENDMENT 1
25 August 1977

MILITARY SPECIFICATION

MOCKUPS, AIRCRAFT, GENERAL SPECIFICATIONS FOR

This amendment forms a part of Military Specification MIL-M-8650C dated 8 July 1976, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

* 2.1.1. Delete "For Navy procurement the Specification Sheets listed on Supplement 1 shall also be applicable." Add "For Navy Procurement the appendices 1 thru 9 of Supplement 2 shall also be applicable."

Delete "Supplement 1 dated 8 July 1976". Add "Replace with the attached Supplement 2 dated 25 August 1977".

Add the following to the bottom of the page:

"Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Engineering Specifications and Standards Department (Code 93), Naval Air Engineering Center, Lakehurst, NJ 08733, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter."

* "The margins of this amendment are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment."

Custodians:
Army - AV
Navy - AS
Air Force - 11

Review Activities;
Army - AV
Navy - AS
Air Force - 11

Preparing Activity:
Navy - AS
Project No. 6910-0380

FSC 6910

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE NAVY
NAVAL AIR SYSTEMS COMMAND
WASHINGTON, D.C. 20360

APPENDIX 1

AIRFRAME SYSTEM - AIRCRAFT MOCKUP INSPECTION CHECKOFF LIST

MODEL _____ AIRCRAFT

CONTRACT NO. _____/FY_____

This AIRFRAME SYSTEM checkoff list consists of the following sections (cross out those sections listed below that are not applicable and omit from list):

A. WING GROUP (PAGES A-1 TO A-2)

B. TAIL GROUP (PAGE B-1)

C. FUSELAGE OR HULL (PAGE C-1)

D. LANDING GEAR (PAGE D-1)

E. FLIGHT CONTROL SYSTEM (PAGES E-1 TO E-2)

F. FUEL TANK SYSTEM (PAGES F-1 TO F-2)

G. OIL TANK SYSTEM (PAGE G-1)

H. HYDRAULIC SYSTEMS (PAGES H-1 TO H-4)

I. PNEUMATIC SYSTEMS (PAGE I-1)

J. FIRE PROTECTION (PAGE J-1)

K. AIR CONDITIONING (PAGE K-1)

L. ANTI-ICING, WASHING, AND DEGREASING (PAGES L-1 TO L-2)

M. ANCHOR GEAR (PAGE M-1)

N. BEACHING GEAR (PAGE N-1)

FSC 6910

Prepared by: _____

Date: _____

NOTE: The abbreviation "N.A." used herein denotes "Not applicable".

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

A. WING GROUP

1. WING FOLDING/SWEEPING

(a) WHAT DIRECTION DO THE OUTER PANELS FOLD? _____

(1) HOW ARE THEY HELD IN THE FOLDED POSITION? _____

(2) CAN AIRCRAFT BE HOISTED WITH WINGS FOLDED AND JURY STRUTS IN PLACE? _____

(3) CAN AIRCRAFT BE HOISTED WITH WINGS SWEPT? _____

(b) HOW MANY HINGES ARE ON EACH PANEL? _____

(c) HOW ARE PANELS ACTUATED? _____ _____

(1) WHERE ARE ACTUATING UNITS LOCATED? _____

(d) HOW MANY MOVABLE HINGE PINS ON EACH PANEL? _____

(1) HOW ARE THEY ACTUATED? _____

(2) HOW ARE THEY LOCKED IN POSITION? _____

(e) HOW IS CORRECT SEQUENCE BETWEEN MOVABLE HINGE PINS AND OUTER PANELS OBTAINED? _

_____

(f) WHAT IS ARRANGEMENT OF WARNING FLAGS? _____

(g) DOES POSITION OF OUTER PANEL POSITIVELY INDICATE THAT IT IS NOT IN THE FULLY SPREAD CONDITION? _____

(h) WHAT ITEMS MAY BE LOCATED ON THE OUTER PANEL DURING FOLDING AND SPREADING OPERATIONS? _____

DURING SWEEPING OPERATIONS? _____

(i) DOES THE PANEL AND ALL ATTACHED ITEMS HAVE ADEQUATE GROUND CLEARANCE DURING FOLDING AND SPREADING? _____

DURING SWEEPING? _____

(j) CAN FLAPS, AILERONS, SPEED BRAKES, ETC., BE IN ANY POSITION DURING FOLDING AND SPREADING? _____

DURING SWEEPING? _____

(k) HOW ARE DOORS AT HINGE LINE OPERATED? _____

(1) HOW ARE THEY LATCHED IN POSITION? _____

2. WHAT TYPE LATERAL CONTROL SURFACES ARE PROVIDED? _____

(a) HOW IS LATERAL TRIM OBTAINED? _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

A. WING GROUP (Cont)

3. WHAT TYPE HIGH LIFT DEVICE IS PROVIDED? _____

4. WHAT TYPE HIGH DRAG DEVICE IS PROVIDED? _____

5. WHAT IS MAXIMUM WING SWEEP ANGLE? _____

INTERMEDIATE POSITION ANGLE? _____

FOR SPOTTING ON CARRIER? _____

6. HOW ARE WINGS ACTUATED? _____

7. WHAT DIRECTION DOES COCKPIT CONTROL MOVE FOR SWEEPING WINGS? _____

8. IS A ELECTRONIC PROGRAMMER USED TO SWEEP WINGS? _____

9. ARE WING GLOVES FIXED OR MOVABLE? _____

10. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

A. WING GROUP

1. WING FOLDING

(a) WHAT DIRECTION DO THE OUTER PANELS FOLD? _____

(1) HOW ARE THEY HELD IN THE FOLDED POSITION? _____

(2) CAN AIRCRAFT BE HOISTED WITH WINGS FOLDED AND JURY STRUTS IN PLACE? _____

(b) HOW MANY HINGES ARE ON EACH PANEL? _____

(c) HOW ARE PANELS ACTUATED? _____

(1) WHERE ARE ACTUATING UNITS LOCATED? _____

(d) HOW MANY MOVABLE HINGE PINS ON EACH PANEL? _____

(1) HOW ARE THEY ACTUATED? _____

(2) HOW ARE THEY LOCKED IN POSITION? _____

(e) HOW IS CORRECT SEQUENCE BETWEEN MOVABLE HINGE PINS AND OUTER PANELS OBTAINED? _____

_____

(f) WHAT IS ARRANGEMENT OF WARNING FLAGS? _____

(g) DOES POSITION OF OUTER PANEL POSITIVELY INDICATE THAT IT IS NOT IN THE FULLY SPREAD CONDITION? _____

(h) WHAT ITEMS MAY BE LOCATED ON THE OUTER PANELS DURING FOLDING AND SPREADING OPERATIONS? _____

(i) DOES THE PANEL AND ALL ATTACHED ITEMS HAVE ADEQUATE GROUND CLEARANCE DURING FOLDING AND SPREADING? _____

(j) CAN FLAPS, AILERONS, SPEED BRAKES, ETC., BE IN ANY POSITION DURING FOLDING AND SPREADING? _____

(k) HOW ARE DOORS AT HINGE LINE OPERATED? _____

(1) HOW ARE THEY LATCHED IN POSITION? _____

2. WHAT TYPE LATERAL CONTROL SURFACES ARE PROVIDED? _____

(a) HOW IS LATERAL TRIM OBTAINED? _____

3. WHAT TYPE HIGH LIFT DEVICE IS PROVIDED? _____

4. WHAT TYPE HIGH DRAG DEVICE IS PROVIDED? _____

5. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

B. TAIL GROUP

1. WHAT TYPE OF EMPENNAGE IS PROVIDED? _____

2. LONGITUDINAL CONTROL SURFACES

   (a) WHAT TYPE IS PROVIDED? _____

   (b) WHAT MEANS ARE PROVIDED FOR LONGITUDINAL TRIM? _____

   _____

3. DIRECTIONAL CONTROL SURFACES

   (a) WHAT MEANS ARE PROVIDED FOR DIRECTIONAL TRIM? _____

   _____

4. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

C. FUSELAGE OR HULL

1. COCKPIT ENCLOSURE

(a) WHAT TYPE COCKPIT ENCLOSURE IS PROVIDED? _____

(b) WHAT IS TRACK ARRANGEMENT? _____

(c) WHAT ARE MEANS FOR NORMAL OPERATION? _____

(d) WHAT ARE MEANS FOR EMERGENCY OPERATION? _____

(e) HOW IS SLIDING SECTION LATCHED IN OPEN POSITION? _____

_____

(f) WHAT TYPE RAIN REMOVAL SYSTEM IS PROVIDED? _____

(g) IS WINDSHIELD WASHER OR DEGREASER PROVIDED? _____

2. CABIN ENCLOSURE

(a) WHAT TYPE CABIN ENCLOSURE IS PROVIDED? _____

(b) CAN SIDE PANELS BE OPENED? _____

(c) WHAT TYPE RAIN REMOVAL SYSTEM IS PROVIDED? _____

(d) IS WINDSHIELD WASHER OR DEGREASER PROVIDED? _____

3. FLOORING

(a) WHAT TYPE FLOORING IS PROVIDED? _____

(b) HOW IS FLOORING REMOVED FOR ACCESS TO STRUCTURE, ETC.? _____

_____

4. DOORS

(a) WHAT TYPE DOORS ARE PROVIDED BETWEEN COMPARTMENTS? _____

_____

(b) ARE DOORS SATISFACTORY AS TO SIZE? _____ OPERATION? _____ SECURING? _____

5. ARE WINDOWS AND PORTS PROPERLY LOCATED? _____

(a) ARE THEY OF ADEQUATE SIZE FOR VISION AND LIGHT? _____

6. ARE HIGH DRAG DEVICES PROVIDED ON THE FUSELAGE? _____

7. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

D. LANDING GEAR (LAND TYPE)

1. WHAT TYPE OF GEAR IS PROVIDED? _____

2. DOES GEOMETRY OF GEAR APPEAR SATISFACTORY? _____

3. MAIN GEAR

   (a) HOW DOES MAIN GEAR RETRACT? _____

   (b) HOW IS MAIN GEAR OPERATED? _____

   (c) HOW ARE WHEEL WELL DOORS ACTUATED? _____

   (d) DO SHOCK STRUT FAIRINGS HAVE ADEQUATE GROUND CLEARANCE? _____

   (e) WHAT ARE MEANS OF EMERGENCY EXTENSION? _____

   (f) WHAT TYPE EMERGENCY BRAKES ARE PROVIDED? _____

   (g) HOW ARE EMERGENCY BRAKES ACTUATED? _____

   (h) HOW MANY WHEELS AUXILIARY GEAR? _____ MAINGEAR? _____

4. AUXILIARY GEAR

   (a) WHAT TYPE SHIMMY DAMPER IS PROVIDED? _____

   (b) WHAT TYPE STEERING DEVICE IS PROVIDED? _____

   (c) WHAT IS NOSE WHEEL CASTOR ANGLE? _____

   (d) CAN NOSE WHEEL PIVOT 360°? _____

   (e) HOW DOES AUXILIARY GEAR RETRACT? _____

   (f) HOW IS AUXILIARY GEAR OPERATED? _____

   (g) HOW ARE WHEEL WELL DOORS ACTUATED? _____

   (h) WHAT ARE MEANS OF EMERGENCY EXTENSION? _____

5. CAN EACH WHEEL BE READILY REPLACED? _____

6. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

E. FLIGHT CONTROL SYSTEMS

1. PRIMARY FLIGHT CONTROL SYSTEMS

(a) LIST THE FOLLOWING INFORMATION FOR PRIMARY FLIGHT CONTROL SYSTEMS:

	LATERAL	DIRECTIONAL	LONGITUDINAL
TYPE			
ARRANGEMENT AT WINGFOLD			

(b) LIST THE FOLLOWING INFORMATION FOR BOOST SYSTEMS:

	LATERAL	DIRECTIONAL	LONGITUDINAL
TYPE			
BOOST RATIO			

2. TRIM CONTROL SYSTEMS

(a) LIST THE FOLLOWING INFORMATION FOR TRIM CONTROL SYSTEMS:

	LATERAL	DIRECTIONAL	LONGITUDINAL
TYPE			

3. HIGH LIFT AND HIGH DRAG DEVICE CONTROL SYSTEMS

(a) LIST THE FOLLOWING INFORMATION FOR HIGH LIFT AND HIGH DRAG DEVICE CONTROL SYSTEMS:

	HIGH LIFT DEVICE SYSTEM	HIGH DRAG DEVICE SYSTEM
TYPE		
BLOW BACK FEATURE		
SYNCHRONIZATION		

4. CABLE CONTROLS

(a) ARE CABLE RUNS STRAIGHT? _____

(b) ARE RIGGING TENSIONS AFFECTED BY DEFLECTION IN AIRPLANE STRUCTURE? _____

(c) WHAT PROVISIONS ARE INCORPORATED TO COMPENSATE FOR EFFECTS OF TEMPERATURE VARIATIONS? _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

E. FLIGHT CONTROL SYSTEMS (Cont)

5. PUSH-PULL TUBE CONTROLS

(a) HOW ARE TUBES SUPPORTED? _____

(b) WILL AIRCRAFT ACCELERATIONS ACTING ON CONTROL SYSTEM COMPONENTS RESULT IN FORCES AT THE COCKPIT CONTROLS? _____

(c) WILL STATIC CONTROL FORCES INCREASE WITH CONTROL DEFLECTION DUE TO THE LIFTING OF CONTROL SYSTEM COMPONENTS? _____

6. TORQUE-TUBE CONTROLS

(a) ARE TORQUE TUBES SUPPORTED ON SELF-ALIGNING BEARINGS? _____

(b) ARE SLIP JOINTS INCORPORATED IN THE SYSTEM? _____

7. CONTROL SURFACE LOCKS

(a) WHAT TYPE LOCKS ARE PROVIDED? _____

(b) WHERE ARE THEY LOCATED? _____

(c) HOW ARE THEY OPERATED? _____

(d) WHAT SAFETY FEATURES ARE PROVIDED? _____

8. ARE ALL PARTS OF THE CONTROL SYSTEM ACCESSIBLE? _____

9. ARE ALL PARTS OF THE CONTROL SYSTEM PROTECTED AGAINST DAMAGE BY PERSONNEL? _____

10. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

F. FUEL TANK SYSTEM

1. FIXED FUEL TANKS

(a) WHAT PROVISION IS MADE FOR ACCESS TO EACH TANK? _____

_____

(b) CAN EACH SELF-SEALING OR FLEXIBLE TANK BE INSTALLED WITH EXCESSIVE DEFORMATION?

_____

(c) DOES TANK SUPPORT CAVITY HAVE ADEQUATE DRAINAGE PROVISIONS? _____

(d) CAN EACH TANK BE INSTALLED WITHOUT INTERFERING WITH OTHER TANKS? _____

(e) IS THERE AN INSPECTION DOOR ON TOP OF EACH SELF-SEALING OR FLEXIBLE TANK? _____

(1) CAN ENTIRE INTERIOR OF TANKS BE READILY INSPECTED THRU TANK INSPECTION DOORS WHEN TANKS ARE INSTALLED IN THE AIRCRAFT? _____

(f) ARE AS MANY TANK FITTINGS AS PRACTICABLE MOUNTED ON INSPECTION DOORS OF SELF-SEALING OR FLEXIBLE TANKS? _____

(g) WHAT ACCESS IS PROVIDED TO INSPECT TANK FITTINGS? _____

2. EXTERNAL AUXILIARY FUEL TANKS

(a) LIST THE FOLLOWING INFORMATION FOR EXTERNAL AUXILIARY FUEL TANKS:

LOCATION	CAPACITY	TYPE	ALTERNATE TYPE

(b) HOW ARE TANKS SUPPORTED? _____

(c) WHAT TYPE OF SWAY BRACING IS USED? _____

(d) WHAT OTHER ITEMS (FAIRINGS, ETC.) DO TANKS REQUIRE? _____

(e) WHAT IS CLEARANCE OF TANKS, WITH FINS ATTACHED, WITH THE GROUND? _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

F. FUEL TANK SYSTEM (Cont)

3. MISCELLANEOUS

(a) ARE FUEL LINES PROTECTED AND SUPPORTED PROPERLY TO PREVENT DAMAGE BY PERSONNEL DURING FLIGHT AND SERVICING OPERATIONS? _____

(b) CAN ALL FITTINGS AND CONNECTIONS IN FUEL LINES BE READILY INSPECTED FOR LEAKAGE?

_____

(c) IS CLEARANCE BETWEEN FUEL LINES AND HOT DUCTS AT LEAST FOUR INCHES? _____

(d) WHAT MEANS FOR DUMPING FUEL ARE PROVIDED? _____

_____

(1) WILL FUEL BE DISCHARGED ON ANY PART OF THE AIRCRAFT? _____

(2) WHAT EFFECT DOES FUEL DUMPING HAVE ON THE C.G. OF THE AIRCRAFT? _____

_____

4. AIR REFUELING SYSTEM

(a) INSTALLATION? CAN THE TANKER PACKAGE BE INSTALLED READILY? _____

(b) SERVICING: IS IT POSSIBLE TO PERFORM PREFLIGHT SERVICING, ADJUSTMENTS AND CHECKS WITHOUT REMOVING THE TANKER PACKAGE FROM THE AIRCRAFT? _____ IS ACCESS AVAILABLE TO ALL SERVICING POINTS? _____ CAN THE HOSE AND DROGUE BE EXTENDED? _____

(c) INTERFERENCE: FOR TANKER EXTERNAL STORES IS GROUND CLEARANCE ADEQUATE UNDER VARIOUS LANDING GEAR STRUT AND TIRE CONDITIONS? _____ DOES INSTALLED STORE INTERFERE WITH MOVEMENT OF LANDING GEAR, FLAPS, SERVICING DOORS OR OTHER PARTS OF THE AIRCRAFT? _____

(d) DUMPING: DOES IT APPEAR THAT FUEL DUMPED FROM THE TANKER PACKAGE WILL CLEAR THE AIRCRAFT WITHOUT IMPINGEMENT? _____

5. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 20261O-17T10:44Z
Check the source to verify that this is the current version before use.

G. OIL TANK SYSTEM

1. IS OIL SYSTEM INTEGRAL WITH ENGINE? _____

2. OIL TANKS

   (a) WHAT PROVISION IS MADE FOR ACCESS TO EACH TANK? _____

   (b) CAN EACH SELF-SEALING OR FLEXIBLE TANK BE INSTALLED WITH EXCESSIVE DEFORMATION?

   _____

   (c) IS THERE AN INSPECTION DOOR ON TOP OF EACH SELF-SEALING OR FLEXIBLE TANK? _____

      (1) WHAT ACCESS IS PROVIDED TO THESE TANK INSPECTION DOORS? _____

      _____

      (2) CAN ENTIRE INTERIOR OF TANKS BE READILY INSPECTED THRU TANK INSPECTION DOORS WHEN TANKS ARE INSTALLED IN THE AIRCRAFT? _____

   (d) ARE AS MANY TANK FITTINGS AS PRACTICABLE MOUNTED ON INSPECTION DOORS OF SELF-SEALING OR FLEXIBLE TANKS? _____

3. MISCELLANEOUS

   (a) ARE OIL LINES PROTECTED AND SUPPORTED TO PREVENT DAMAGE BY PERSONNEL DURING FLIGHT AND SERVICING OPERATIONS? _____

   (b) IS CLEARANCE BETWEEN OIL LINE AND HOT DUCTS AT LEAST FOUR INCHES? _____

   (c) CAN ALL FITTINGS AND CONNECTIONS IN OIL LINES BE READILY INSPECTED? _____

4. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

H. HYDRAULIC SYSTEMS

1. GENERAL

(a) LIST THE FOLLOWING INFORMATION FOR THE HYDRAULIC SYSTEMS:

	UTILITY SYSTEM	FLIGHT CONTROL SYSTEM NO.1	FLIGHT CONTROL SYSTEM NO.2
TYPE OF SYSTEM			
OPERATING PRESSURE			

2. ITEMS OPERATED

(a) LIST THE FOLLOWING INFORMATION FOR ITEMS OPERATED:

ITEM	SYSTEM	CONTROL VALVE LOCATION	METHOD OF VALVE OPERATION

3. RESERVOIRS

(a) LIST THE FOLLOWING INFORMATION FOR RESERVOIRS:

TYPE	SYSTEM	LOCATION	SIZE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

H. HYDRAULIC SYSTEMS (Cont)

3. (Cont)

(b) ARE EMERGENCY RESERVOIRS PROVIDED? _____

(c) WHAT IS LOCATION OF EMERGENCY RESERVOIRS WITH RESPECT TO MAIN RESERVOIR? _____

_____

(d) IS SIGHT GAGE ON EACH RESERVOIR READILY VISIBLE FOR MAINTENANCE OPERATIONS? ____

(e) CAN RESERVOIR FILTERS BE REPLACED WITHOUT REMOVING TANKS? _____

(f) WHAT MEANS ARE PROVIDED AT THE FILLER NECK TO PREVENT SPILLAGE DUE TO OVER FLOW?

_____

(g) IN MULTIPLACE AIRCRAFT, CAN RESERVOIRS BE FILLED IN FLIGHT FROM A ONE GALLON CAN?

_____

4. ACCUMULATORS

(a) *LIST THE FOLLOWING INFORMATION FOR ACCUMULATORS:*

TYPE	LOCATION	SIZE

5. ENGINE DRIVEN PUMPS

(a) LIST THE FOLLOWING INFORMATION FOR ENGINE DRIVEN PUMPS:

TYPE	LOCATION	SIZE

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

H. HYDRAULIC SYSTEMS (Cont)

6. AUXILIARY PUMPS

(a) LIST THE FOLLOWING INFORMATION FOR AUXILIARY PUMPS:

TYPE	LOCATION	SIZE

7. LINE TYPE FILTERS

(a) CAN FILTER ELEMENTS BE READILY REPLACED? _____

(b) ARE INDICATOR BUTTONS ACCESSIBLE FOR PREFLIGHT INSPECTION? _____

8. BRAKE SYSTEM

(a) WHAT TYPE SYSTEM IS PROVIDED FOR BRAKES? _____

(b) CAN SYSTEM READILY BE BLED AT THE WHEELS? _____

(c) CAN BRAKE FLUID READILY BE REPLENISHED? _____

(d) ARE BRAKE SYSTEM LINES RUNNING DOWN SHOCK STRUTS ADEQUATELY PROTECTED? _____

(e) CAN WHEELS BE REMOVED WITHOUT DISCONNECTING HYDRAULIC LINES? _____ IF NOT, ARE SELF-SEALING COUPLINGS PROVIDED? _____

9. EMERGENCY OR AUXILIARY SYSTEM

(a) LIST THE FOLLOWING INFORMATION FOR ITEMS OPERATED:

ITEM	TYPE	SYSTEM	CAPACITY	LOCATION OF BOTTLE

(b) ARE GAGES ON AIR BOTTLES READILY VISIBLE FOR PREFLIGHT CHECKS? _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

H. HYDRAULIC SYSTEMS (Cont)

10. INDICATORS

(a) WHAT INDICATORS ARE PROVIDED IN THE COCKPIT? _____

_____

(b) WHAT ADDITIONAL INDICATORS ARE PROVIDED? _____

_____

(1) WHERE ARE THEY LOCATED? _____

11. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

I. PNEUMATIC SYSTEM

1. GENERAL

(a) LIST THE FOLLOWING INFORMATION FOR THE PNEUMATIC SYSTEM:

TYPE OF SYSTEM _____

OPERATING PRESSURE _____

2. ITEMS OPERATED

(a) LIST THE FOLLOWING INFORMATION FOR ITEMS OPERATED:

ITEM	CONTROL VALVE LOCATION	METHOD OF VALVE OPERATION

3. STORAGE TANKS

(a) LIST THE FOLLOWING INFORMATION FOR STORAGE TANKS:

LOCATION	CAPACITY

4. WHAT INDICATORS ARE PROVIDED? _____

_____

5. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

J. FIRE PROTECTION

1. FIRE EXTINGUISHING SYSTEM

(a) WHAT IS ARRANGEMENT OF FIXED ENGINE FIRE EXTINGUISHER SYSTEM? _____

_____

(b) WHAT TYPE OF PROTECTION DOES IT PROVIDE? _____

(c) WHAT EXTINGUISHING AGENT IS USED? _____

(d) WHAT IS SIZE AND NUMBER OF EXTINGUISHING AGENT CONTAINERS? _____

(e) ARE EXTINGUISHING AGENT CONTAINERS READILY REMOVABLE? _____

(f) ARE THE SAFETY DISCHARGE OUTLETS PLACARDED AND LOCATED FOR READY INSPECTION? ____

(g) LIST INFORMATION FOR PORTABLE FIRE EXTINGUISHERS AS FOLLOWS:

LOCATION	SIZE

2. FIRE DETECTOR SYSTEM

(a) WHAT TYPE OF SYSTEM IS PROVIDED? _____

(b) IS THERE ANY DANGER OF WIRES IN THE DETECTOR SYSTEM BEING DAMAGED BY FIRE BEFORE THE FIRE REACHES THE DETECTOR UNITS? _____

3. ENGINE SECTION

(a) WILL FIREWALL PREVENT FIRES IN ENGINE SECTION FROM SPREADING? _____

(b) ARE DIAPHRAGMS PROVIDED TO SEPARATE THE POWER AND ACCESSORY SECTIONS? _____

(c) WHAT TYPE INFLAMMABLE FLUID LINES ARE IN THE ENGINE COMPARTMENT? _____

(d) ON MULTI-ENGINE AIRCRAFT, DO ALL INFLAMMABLE FLUID LINES HAVE SHUT-OFF VALVES AT THE FIREWALLS? _____

(1) ARE THESE VALVES ON THE SIDE OF THE FIREWALL OPPOSITE TO THE ENGINE? _____

(2) ARE THE SHUT-OFF VALVE SUPPORTING BRACKETS AND CONTROLS SO ARRANGED THAT THEY ARE NOT SUBJECT TO DAMAGE BY FIRE BEFORE THE VALVES CAN BE OPERATED? _____

4. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

K. AIR CONDITIONING

1. LIST INFORMATION FOR AIR CONDITIONING AS FOLLOWS:

	COCKPIT	OTHER COMPARTMENTS
(a) HEATER		
LOCATION	_____	_____
MANUFACTURER	_____	_____
MODEL	_____	_____
RATED OUTPUT	_____	_____
(b) FRESH AIR INLETS		
LOCATION	_____	_____
SIZE	_____	_____
(c) SYSTEM OUTLETS		
LOCATION	_____	_____
SIZE	_____	_____
(d) SHUT-OFF VALVE		
LOCATION	_____	_____
HOW OPERATED	_____	_____

2. PRESSURIZATION

(a) WHAT IS DIFFERENTIAL PRESSURE OF THE COCKPIT? _____

(b) WHAT IS SOURCE OF COMPRESSED AIR SUPPLY? _____

(c) WHERE IS PRESSURE REGULATOR LOCATED? _____

(1) IS THE VALVE INTERLOCKED WITH ENCLOSURE AND SEAT EJECTION CONTROLS? _____

(d) WHERE IS THE COMBINATION RELIEF, DUMP, AND SAFETY VALVE LOCATED? _____

(1) IS THE VALVE INTERLOCKED WITH ENCLOSURE AND SEAT EJECTION CONTROLS? _____

(e) WHAT IS SIZE AND LOCATION OF FITTINGS FOR COMPRESSED AIR SUPPLY TO COCKPIT FOR GROUND TESTS? _____

(1) WHAT IS SIZE AND LOCATION OF FITTINGS FOR STATIC PRESSURE CONNECTION? _____

_____

3. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

L. ANTI-ICING, WASHING, AND DEGREASING

1. NON-TRANSPARENT AREAS

(a) FOR WHAT NON-TRANSPARENT AREAS IS ANTI-ICING PROVIDED? _____

_____

(b) WHAT TYPE ANTI-ICING IS PROVIDED? _____

(c) WHAT IS HEAT SOURCE FOR THERMAL ANTI-ICING? _____

(1) WHERE ARE HEATERS OR HEAT EXCHANGERS LOCATED? _____

(2) HOW IS OVERHEATING OF SURROUNDING STRUCTURE, FUEL TANKS, ETC., PREVENTED? _____

_____

(3) IS A SOLENOID SHUT-OFF VALVE LOCATED IN THE HEATER FUEL LINE AT THE POINT WHERE IT JOINS THE MAIN FUEL SYSTEM? _____

(4) HOW IS THIS VALVE OPERATED? _____

(5) WHERE IS VALVE CONTROL LOCATED? _____

(6) IS VALVE CONTROL IDENTIFIED? _____

(d) WHAT ANTI-ICING CONTROLS ARE PROVIDED? _____

(1) WHERE ARE THEY LOCATED? _____

2. TRANSPARENT AREAS

(a) STATE "YES", "NO", OR "N.A." IN REGARD TO THE FOLLOWING:

	ANTI-ICING	DEFOGGING	DEFROSTING
WINDSHIELD	_____	_____	_____
ENCLOSURE	_____	_____	_____
CAMERA WINDOW	_____	_____	_____
BOMBER'S WINDOW	_____	_____	_____

(b) WHAT TYPE IS PROVIDED? _____

(c) WHAT CONTROLS ARE PROVIDED? _____

(d) WHERE ARE CONTROLS LOCATED? _____

(e) ARE WINDSHIELD WIPERS PROVIDED? _____

(f) RAIN REMOVAL PROVIDED BY WHAT MEANS? _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

L. ANTI-ICING, WASHING, AND DEGREASING (Cont)

3. DEGREASING (For Aircraft with reciprocating engines installed forward of windshield)

(a) FOR WHAT TRANSPARENT AREAS IS WASHING OR DEGREASING PROVIDED? _____

_____

(b) WHAT IS TANK CAPACITY? _____

(c) WHERE IS TANK LOCATED? _____

(d) WHERE IS TANK FILLER NECK LOCATED? _____

(e) WHERE IS TANK GAGE LOCATED? _____

(f) WHAT TYPE PUMP IS PROVIDED? _____

(g) WHAT CONTROLS ARE PROVIDED? _____

(h) WHERE ARE CONTROLS LOCATED? _____

4. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

M. ANCHOR GEAR

1. WHAT TYPE AND SIZE ANCHOR IS PROVIDED? _____

   (a) WHERE IS ANCHOR STOWED? _____

2. WHAT TYPE AND SIZE ANCHOR LINE IS PROVIDED? _____

3. WHAT TYPE DAVIT IS PROVIDED? _____

   (a) DOES DAVIT EXTEND FAR ENOUGH OUTBOARD TO PERMIT ANCHOR TO CLEAR CHINE? _____

   (b) DOES DAVIT PERMIT REQUIRED ANGULARITY OF THE ANCHOR LINE? _____

4. WHAT TYPE WINCH IS PROVIDED? _____

5. WHAT TYPE AND SIZE PENDANT IS PROVIDED? _____

6. HOW MANY AND WHAT TYPE SEA ANCHORS ARE PROVIDED? _____

   (a) WHERE ARE SEA ANCHORS STOWED? _____

7. WHAT TYPE SNUBBING POSTS ARE PROVIDED? _____

   (a) WHERE ARE THEY LOCATED? _____

8. WHAT IS CLEAR OPENING SIZE OF WARM-UP AND STERN TOW FITTING? _____

   (a) CAN LINE ATTACHMENT BE MADE FROM INSIDE HULL? _____

9. IS A KEEL HOOK FITTING PROVIDED? _____

10. WHAT IS CLEAR OPENING SIZE OF HANDLING AND STEADYING FITTINGS? _____

    (a) WHERE ARE THEY LOCATED? _____

11. IS BUOY HOOK OR BOAT HOOK PROVIDED? _____

    (a) WHERE IS IT STOWED? _____

12. WHERE IS BUOY LINE STOWED? _____

13. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

M. BEACHING GEAR

1. WHAT TYPE BEACHING GEAR IS PROVIDED? _____

   (a) CAN GEAR BE CARRIED IN THE AIRCRAFT? _____

2. LIST INFORMATION FOR MAIN GEAR AS FOLLOWS:

	TYPE	SIZE	METHOD OF OPERATION
WHEELS	_____	_____	
TIRES	_____	_____	
BRAKES	_____	_____	_____

3. LIST INFORMATION FOR AUXILIARY GEAR AS FOLLOWS:

	TYPE	SIZE
WHEELS	_____	_____
TIRES	_____	_____

4. WHAT IS METHOD OF ATTACHING GEAR TO AIRPLANE? _____

   _____

5. WHAT TYPE OF BALLAST AND BUOYANCY TANKS ARE USED? _____

   _____

6. WHERE ARE JACK PADS LOCATED? _____

7. ARE ADEQUATE WHEELS PROVIDED FOR HANDLING THE GEAR ON THE GROUND? _____

8. WHERE ARE MAIN GEAR TOW FITTINGS LOCATED? _____

9. WHAT MEANS ARE PROVIDED FOR TURNING MAIN GEAR WHEELS TO THE 45° AND 90° POSITIONS?

   _____

   _____

10. ARE PROVISIONS MADE IN AUXILIARY GEAR FOR STEERING? _____

11. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE NAVY
NAVAL AIR SYSTEMS COMMAND
WASHINGTON, D.C. 20360

APPENDIX 2

AIRCREW SYSTEMS - AIRCRAFT MOCKUP INSPECTION CHECKOFF LIST

MODEL _____ AIRCRAFT

CONTRACT NO. _____/FY_____

This AIRCREW SYSTEMS checkoff list consists of the following sections (cross out those sections listed below that are not applicable and omit from list):

A. COCKPIT (PILOT/COPILOT/NFO) (NAVAL FLIGHT OFFICER)) (PAGES A-1 TO A-30)

B. SAFETY OF AIRCREW (PAGE B-1)

C. ACCESS (PAGES C-1 TO C-2)

D. ATMOSPHERIC PROTECTION SYSTEM (PAGE D-1)

E. RADIO OPERATOR'S STATION (PAGES E-1 TO E-2)

F. RADAR OPERATOR'S STATION (PAGES F-1 TO F-2)

G. NAVIGATOR'S STATION (PAGE G-1)

H. FLIGHT ENGINEER'S STATION (PAGES H-1 TO H-2)

I. CIC OPERATOR'S STATION (PAGES I-1 TO I-2)

J. FURNISHINGS AND EQUIPMENT (PAGES J-1 TO J-2)

K. (OTHER) STATION

(PAGES K-1 TO K-2)

FSC 6910

Prepared by: _____

Date: _____

NOTE: The abbreviation "N.A." used herein denotes "Not applicable".

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

A. COCKPIT

1. GENERAL

a. SEATS (PILOT/CO-PILOT/NFO (NAVAL FLIGHT OFFICER))

(1) FIXED SEATS (MANUAL ESCAPE CAPABILITY ONLY)

(a) IS THE VERTICAL AND FORE-AND-AFT ADJUSTMENT ACCOMPLISHED TOGETHER _____ OR SEPARATELY? _____

1. ARE THE ADJUSTMENTS MADE MANUALLY _____ OR BY A SEAT ADJUSTMENT MOTOR? _____

2. IN WHAT INCREMENTS CAN THE ADJUSTMENTS BE MADE? VERTICALLY _____ FORE-AND-AFT _____

3. HOW IS SEAT ADJUSTMENT ACCOMPLISHED? _____

4. WHERE IS(ARE) THE ADJUSTMENT CONTROL(S) LOCATED? VERTICAL ADJUSTMENT _____ FORE-AND-AFT ADJUSTMENT _____ _____

(b) HOW IS ADJUSTMENT OF THE HEADREST ACCOMPLISHED? _____

_____

(c) WHAT TYPE OF PERSONNEL PROTECTIVE AND SURVIVAL EQUIPMENT IS THE SEAT DESIGNED TO ACCOMMODATE?

PERSONNEL PROTECTIVE _____

PARACHUTE _____

SEAT CUSHION _____

EMERGENCY OXYGEN _____

SURVIVAL EQUIPMENT KIT(S) _____

(d) HOW IS MANUAL EGRESS FROM THE SEAT EFFECTED? _____

_____

(e) IS SUFFICIENT CLEARANCE AVAILABLE THROUGHOUT THE RANGE OF SEAT VERTICAL AND FORE-AND-AFT ADJUSTMENTS FOR THE FULLY EQUIPPED CREWMAN TO EFFECT MANUAL ESCAPE? _____

PROBLEMS NOTED _____

_____

(f) WHAT TYPE OF PERSONNEL RESTRAINT SYSTEM IS USED? _____

_____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

A. COCKPIT (Cont)

1. GENERAL (Cont)
a. SEATS (Cont)
(1) FIXED SEATS (MANUAL ESCAPE) (Cont)

(g) IS THE SEAT EQUIPPED WITH A CORRECTLY MOUNTED INERTIA REEL CONFORMING TO APPLICABLE MILITARY SPECIFICATION? YES _____ NO _____ (MILSPEC NO. _____)

1. WHERE IS THE INERTIA REEL MANUAL CONTROL LOCATED? _____

_____

(h) IS THERE AN INDICATOR PROVIDED SO PILOT/CO-PILOT CAN DETERMINE DESIGN EYE REFERENCE LEVEL? _____

(i) WHAT RANGE OF CREWMEN CAN BE ACCOMMODATED BY EACH SEAT-CREW STATION INSTALLATION?

SITTING HEIGHT _____

EYE HEIGHT SITTING _____

HEAD HEIGHT _____

FUNCTIONAL ARM REACH _____

BUTTOCK KNEE LENGTH _____

BUTTOCK LEG LENGTH _____

BIDELTOID DIAMETER _____

HIP BREADTH-SITTING _____

(j) WHAT ARE (a) THE BUTTOCK TANGENT LINE ANGLE WITH THE TRUE HORIZONTAL _____.
(b) THE BACK TANGENT LINE WITH THE TRUE VERTICAL _____ AND
(c) THE OPEN BODY ANGLE? _____

1. DO ANY OF THE ANGLES CHANGE WITH CHANGES IN VERTICAL AND/OR FORE-AND-AFT SEAT POSITION? YES _____ NO _____ (IF YES, DESCRIBE _____

_____

_____)

(k) WERE ANY DEVIATIONS FROM APPLICABLE SEAT SPECIFICATIONS NOTED DURING REVIEW? YES _____. NO _____. DESCRIBE: _____

_____

_____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

A. COCKPIT (Cont.)

1. GENERAL (Cont)
a. SEATS (Cont)

(2) EJECTABLE SEATS
(a) WHAT TYPE SEAT IS PROVIDED? _____

(b) IS THE VERTICAL AND FORE-AND-AFT ADJUSTMENT ACCOMPLISHED TOGETHER _____ OR SEPARATELY? _____

1. ARE THE ADJUSTMENTS MADE MANUALLY _____ OR BY A SEAT ADJUSTMENT MOTOR? _____

2. IN WHAT INCREMENTS CAN THE ADJUSTMENTS BE MADE?
VERTICALLY _____

FORE-AND-AFT _____

3. HOW IS SEAT ADJUSTMENT ACCOMPLISHED? _____

_____

4. WHERE IS(ARE) THE ADJUSTMENT CONTROL(S) LOCATED?
VERTICAL ADJUSTMENT _____

FORE-AND-AFT ADJUSTMENT _____

(c) IS AUTOMATIC SEAT BUCKET BOTTOMING PART OF THE PRE-EJECTION SEQUENCE?

_____

(d) IS AUTOMATIC SEAT POSITIONING PART OF THE PRE-EJECTION SEQUENCE? _____

(e) IS AUTOMATIC REMOVAL OF EQUIPMENT FROM THE ESCAPE PATH PART OF THE PRE-EJECTION SEQUENCE? _____

(f) IS THE CANOPY (OR ESCAPE HATCH) JETTISONED _____ OR SEVERED _____ AS PART OF THE EJECTION SEQUENCE? _____

(g) CAN THE CREWMEMBER BE EJECTED THROUGH THE CANOPY (OR ESCAPE HATCH) AUTOMATICALLY IN THE EVENT THE JETTISONING/SEVERANCE SYSTEM FAILS TO FUNCTION?

_____

1. DOES THE SEAT CONTACT THE CANOPY (OR ESCAPE HATCH) AND BREAK A PATH FOR THE CREWMAN? _____

(h) IS AN AUTOMATED UNDERWATER ESCAPE SEQUENCE PROVIDED? YES _____ NO _____
(IF YES, DESCRIBE OPERATION? _____

_____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

A. COCKPIT (Cont)

1. GENERAL (Cont)
a. SEATS (Cont)
(2) EJECTABLE SEATS (Cont)
(i) FOR WHAT TYPE OF PERSONNEL PROTECTIVE AND SURVIVAL EQUIPMENT IS THE SEAT DESIGNED TO ACCOMMODATE?
PERSONNEL PROTECTIVE _____

PARACHUTE _____

SEAT CUSHION _____

EMERGENCY OXYGEN _____

SURVIVAL EQUIPMENT KIT(S) _____

(j) HOW IS MANUAL EGRESS FROM THE SEAT EFFECTED? _____

_____

(k) IS SUFFICIENT CLEARANCE AVAILABLE THROUGHOUT THE RANGE OF SEAT VERTICAL AND FORE-AND-AFT ADJUSTMENTS FOR THE FULLY EQUIPPED CREWMAN TO EFFECT MANUAL ESCAPE FROM THE AIRCRAFT? _____

(l) WHAT FORE-AND-AFT CLEARANCE _____ AND ATHWARTSHIPS CLEARANCE _____ IS PROVIDED THROUGHOUT THE EJECTION PATH?

(m) ARE THERE ANY PROTRUSIONS INTO THE SPACE REQUIRED CLEAR FOR EITHER MANUAL EGRESS OR EJECTION SAFETY? _____

1. DESCRIBE TYPE AND AMOUNT OF PROTRUSION _____

_____

(n) WHAT TYPE OF PERSONNEL RESTRAINT SYSTEM IS USED? _____

_____

(o) IS THE SEAT EQUIPPED WITH A CORRECTLY MOUNTED BALLISTIC-POWERED INERTIA-LOCKING SHOULDER HARNESS TAKE-UP DEVICE CONFORMING TO THE APPLICABLE MILITARY SPECIFICATION? _____

1. WHERE IS THE DEVICE MANUAL CONTROL LOCATED? _____

_____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

A. COCKPIT (Cont)

1. GENERAL (Cont)
a. SEATS (Cont)
(2) EJECTABLE SEATS (Cont)
(p) WHAT RANGE OF CREWMEN CAN BE ACCOMMODATED BY EACH SEAT-CREW STATION INSTALLATION?
SITTING HEIGHT _____

EYE HEIGHT, SITTING _____

HEAD HEIGHT _____

FUNCTIONAL ARM REACH _____

BUTTOCK KNEE LENGTH _____

BUTTOCK LEG LENGTH _____

BIDELTOID DIAMETER _____

HIP-BREADTH-SITTING _____

(q) WHAT ARE (a) THE BUTTOCK TANGENT LINE ANGLE WITH THE TRUE HORIZONTAL _____, (b) THE BACK TANGENT LINE WITH THE TRUE VERTICAL _____, AND (c) THE OPEN BODY ANGLE? _____

1. DO ANY OF THE ANGLES CHANGE WITH CHANGES IN VERTICAL AND/OR FORE-AND-AFT SEAT POSITION? YES _____ NO _____ (IF YES, DESCRIBE _____

_____

_____

(r) WHAT IS THE ANGLE AT WHICH THE SEAT IS EJECTED? _____
1. WHAT IS THE RELATIONSHIP BETWEEN THE EJECTION ANGLE AND THE BACK TANGENT LINE? _____

2. WHAT IS THE RELATIONSHIP BETWEEN THE ROCKET MOTOR THRUST ANGLE AND THE BACK TANGENT LINE? _____

(s) IN MULTIPLACE INSTALLATIONS
1. ARE SEATS AND CANOPIES SEQUENCED OR SEATS ONLY? _____

2. HOW IS SEQUENCE SYSTEM INITIATED?

(a) BY PILOT _____

(b) BY CREWMAN _____

3. HOW IS SEQUENCE INITIATION CONTROLLED?
(a) COMMAND SELECTOR (FRONT & REAR) _____

(b) COMMAND SELECTOR (REAR ONLY) _____

(c) OTHER _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

A. COCKPIT (Cont)

1. GENERAL (Cont)
a. SEATS (Cont)
(2) EJECTABLE SEATS (Cont)
(t) ESCAPE SYSTEM ACTUATION MEANS:
1. PRIMARY - (NORMALLY FACE CURTAIN)
(a) IN THE STOWED POSITION, WHAT IS THE RELATIONSHIP BETWEEN FACE CURTAIN HANDLES AND TOP OF HELMET OF 98% HEAD HEIGHT CREWMAN WITH EYE AT DESIGN EYE POSITION? _____

(b) IN THE EXTENDED POSITION ARE THE HANDGRIPS IN THE OPTIMUM POSITION?

_____

1. WHAT TYPE HANDGRIPS ARE USED? _____

2. WHAT IS THE DISTANCE BETWEEN HANDGRIPS? _____

2. SECONDARY FIRING MEANS:
(a) TYPE & SIZE _____

(b) LOCATION _____

(c) SAFETY PROVISIONS _____

(u) WHAT LEG RETENTION IS INCORPORATED? _____

(v) WHAT LOWER TORSO AND/OR HEAD RESTRAINTS ARE INCORPORATED? _____

_____

(w) ARE ALL PERSONAL SERVICES CONNECTIONS BETWEEN THE AIRCRAFT AND THE SEAT OR PILOT AUTOMATICALLY BROKEN PRIOR TO OR DURING EJECTION? _____

_____

(x) IS AN AUTOMATIC PERSONNEL RESTRAINT SYSTEM RELEASE PROVIDED? _____

_____

(y) IS AN AUTOMATIC PARACHUTE OPENER PROVIDED? _____

(z) IS THE VERTICAL DIMENSION OF THE HEADREST SUCH THAT THE PILOT'S HEAD WILL GO BELOW IT, DUE TO BODY COMPRESSION, WHEN THE SEAT IS EJECTED? _____

_____

(aa) WHAT GROUND SAFETY DEVICES ARE INCORPORATED? _____

_____

1. DO THEY COMPLY WITH THE APPLICABLE EJECTION SEAT SPECIFICATION? _____

_____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

A. COCKPIT (Cont)

1. GENERAL (Cont)
a. SEATS (Cont)
(2) EJECTABLE SEATS (Cont)
(bb) DIMENSIONAL DATA
1. LIST THE BASIC COCKPIT DIMENSIONS AS REQUIRED BY FIGURE 1, SHEETS 1 AND 3. (PAGES A-11, A-13)
2. LIST THE COCKPIT CLEARANCE DIMENSIONS AS REQUIRED BY FIGURE 1, SHEETS 2 AND 3. (PAGES A-12, A-13)

(cc) WERE ANY DEVIATIONS FROM APPLICABLE SEAT SPECIFICATIONS NOTED DURING REVIEW? YES _____ NO _____ DESCRIBE: _____

(dd) ANY SPECIAL CONTROLS ON SEAT? _____

(ee) DO EJECTION SEATS HAVE TO BE REMOVED TO PERMIT MAINTENANCE OF COCKPIT EQUIPMENT? _____

WHICH EQUIPMENT? _____

HOW FREQUENTLY? _____

(3) FIXED SEATS INSTALLED IN COCKPIT CAPSULE AIRCREW ESCAPE SYSTEM
(a) WHAT TYPE SEAT IS PROVIDED? _____

(b) IS THE VERTICAL, FORE-AND-AFT-AND-TILT ADJUSTMENT ACCOMPLISHED TOGETHER OR SEPARATELY? _____
1. ARE THE ADJUSTMENTS MADE MANUALLY _____ OR BY A SEAT ADJUSTMENT MOTOR? _____
2. IN WHAT INCREMENTS CAN THE ADJUSTMENTS BE MADE?
VERTICALLY _____

FORE-AND-AFT _____

TILT _____
3. HOW IS SEAT ADJUSTMENT ACCOMPLISHED? _____

4. WHERE IS(ARE) THE ADJUSTMENT CONTROL(S) LOCATED?
VERTICAL ADJUSTMENT _____

FORE-AND-AFT _____

TILT _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

A. COCKPIT (Cont)

1. GENERAL (Cont)
a. SEATS (Cont)
(3) FIXED SEATS (CAPSULE ESCAPE) (Cont)

(c) WHAT FORE-AND-AFT CLEARANCE _____ AND ATHWARTSHIPS CLEARANCE _____ IS PROVIDED FOR EACH CREWMEMBER WHEN EQUIPMENTS ARE STOWED?

(d) ARE THERE ANY PROTRUSIONS INTO THE SPACE REQUIRED CLEAR FOR CREW SAFETY DURING EITHER MANUAL EGRESS OR AUTOMATED ESCAPE? _____

(e) IS AN AUTOMATED UNDERWATER ESCAPE SEQUENCE PROVIDED? YES _____ NO _____
(IF YES, DESCRIBE OPERATION _____
_____)

(f) FOR WHAT TYPES OF PERSONNEL PROTECTIVE AND SURVIVAL EQUIPMENT IS THE SEAT DESIGNED TO ACCOMMODATE?
PERSONNEL PROTECTIVE _____

SEAT CUSHION _____

EMERGENCY OXYGEN _____

SURVIVAL EQUIPMENT KIT(S) _____

(g) HOW IS MANUAL EGRESS FROM THE SEAT EFFECTED? _____
_____

(h) IS SUFFICIENT CLEARANCE AVAILABLE THROUGHOUT THE RANGE OF SEAT VERTICAL AND FORE-AND-AFT ADJUSTMENTS FOR THE FULLY EQUIPPED CREWMAN TO EFFECT MANUAL ESCAPE FROM THE AIRCRAFT? _____
_____

(i) WHAT TYPE OF PERSONNEL RESTRAINT SYSTEM IS USED? _____
_____

(j) IS THE SEAT EQUIPPED WITH A CORRECTLY MOUNTED BALLISTIC-POWERED INERTIA-LOCKING SHOULDER HARNESS TAKE-UP DEVICE CONFORMING TO THE APPLICABLE MILITARY SPECIFICATION? _____
1. WHERE IS THE DEVICE MANUAL CONTROL LOCATED? _____
_____
_____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

A. COCKPIT (Cont)

1. GENERAL (Cont)
a. SEATS (Cont)
(3) FIXED SEATS (CAPSULE ESCAPE) (Cont)
(k) WHAT RANGE OF CREWMAN CAN BE ACCOMMODATED BY EACH SEAT-CREW STATION INSTALLATION?

SITTING HEIGHT _____

EYE HEIGHT, SITTING _____

HEAD HEIGHT _____

FUNCTIONAL ARM REACH _____

BUTTOCK KNEE LENGTH _____

BUTTOCK LEG LENGTH _____

BIDELTOID DIAMETER _____

HIP-BREADTH-SITTING _____

(l) WHAT ARE (a) THE BUTTOCK TANGENT LINE ANGLE WITH THE TRUE HORIZONTAL _____, (b) THE BACK TANGENT LINE WITH THE TRUE VERTICAL _____ AND (c) THE OPEN BODY ANGLE? _____

1. DO ANY OF THE ANGLES CHANGE WITH CHANGES IN VERTICAL AND/OR FORE-AND-AFT SEAT POSITION? YES _____ NO _____ (IF YES, DESCRIBE _____

_____

(m) WHAT IS RANGE OF THE ANGLES AT WHICH THE COCKPIT CAPSULE IS EJECTED FROM THE AIRCRAFT? _____

1. WHAT IS THE RELATIONSHIP BETWEEN THE COCKPIT CAPSULE EJECTION ANGLE AND THE BACK TANGENT LINES? _____

_____

2. WHAT IS THE RELATIONSHIP BETWEEN THE ROCKET MOTOR THRUST ANGLE AND THE BACK TANGENT LINE? _____

_____

(n) WHAT TYPE ESCAPE SYSTEM FIRING CONTROLS ARE USED? _____

1. WHERE ARE THEY LOCATED? _____

2. WHICH CREWMEMBERS CAN INITIATE ESCAPE SEQUENCE? _____

_____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

A. COCKPIT (Cont)

1. GENERAL (Cont)
a. SEATS (Cont)
(3) FIXED SEATS (CAPSULE ESCAPE) (Cont)
(o) WHAT LOWER TORSO AND/OR HEAD RESTRAINTS ARE INCORPORATED? _____

_____

(p) WHAT GROUND SAFETY DEVICES ARE INCORPORATED? _____

_____

1. DO THEY COMPLY WITH THE APPLICABLE COCKPIT CAPSULE AIRCREW ESCAPE SYSTEM SPECIFICATION? _____

(q) WERE ANY DEVIATIONS FROM APPLICABLE COCKPIT CAPSULE AIRCREW ESCAPE SYSTEM SPECIFICATION NOTED DURING REVIEW? YES _____ NO _____ DESCRIBE:

_____

_____

b. DIMENSIONAL DATA

(1) LIST THE BASIC COCKPIT DIMENSIONS AS REQUIRED BY FIGURE 1, SHEETS 1 AND 3. (PAGES A-11, A-13)


(2) LIST THE COCKPIT CLEARANCE DIMENSIONS AS REQUIRED BY FIGURE 1, SHEETS 2 AND 3. (PAGES A-12 , A-13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

1. GENERAL (Cont)

b. (1) DIMENSIONAL DATA (Cont)

A. COCKPIT (Cont)

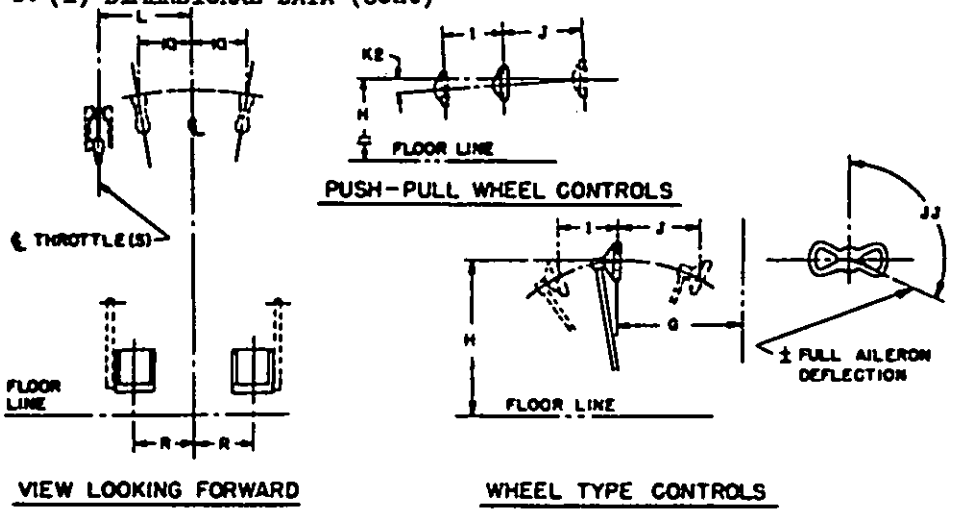

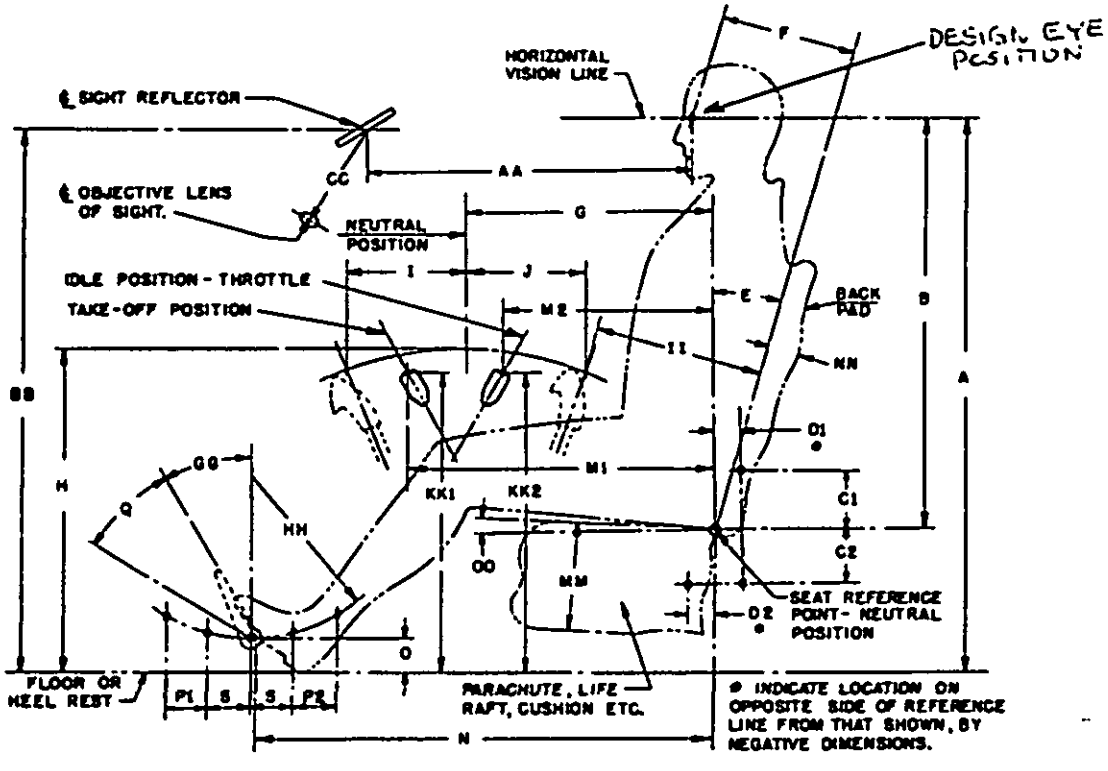


FIGURE 1 (SHEET 1)

BASIC COCKPIT DIMENSIONS

(SPECIFY DIMENSION VALUES ON SHEET-3)

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the currentversion before use.

A. COCKPIT (Cont)

1. GENERAL (Cont)
b. (2) CLEARANCE DATA (Cont)

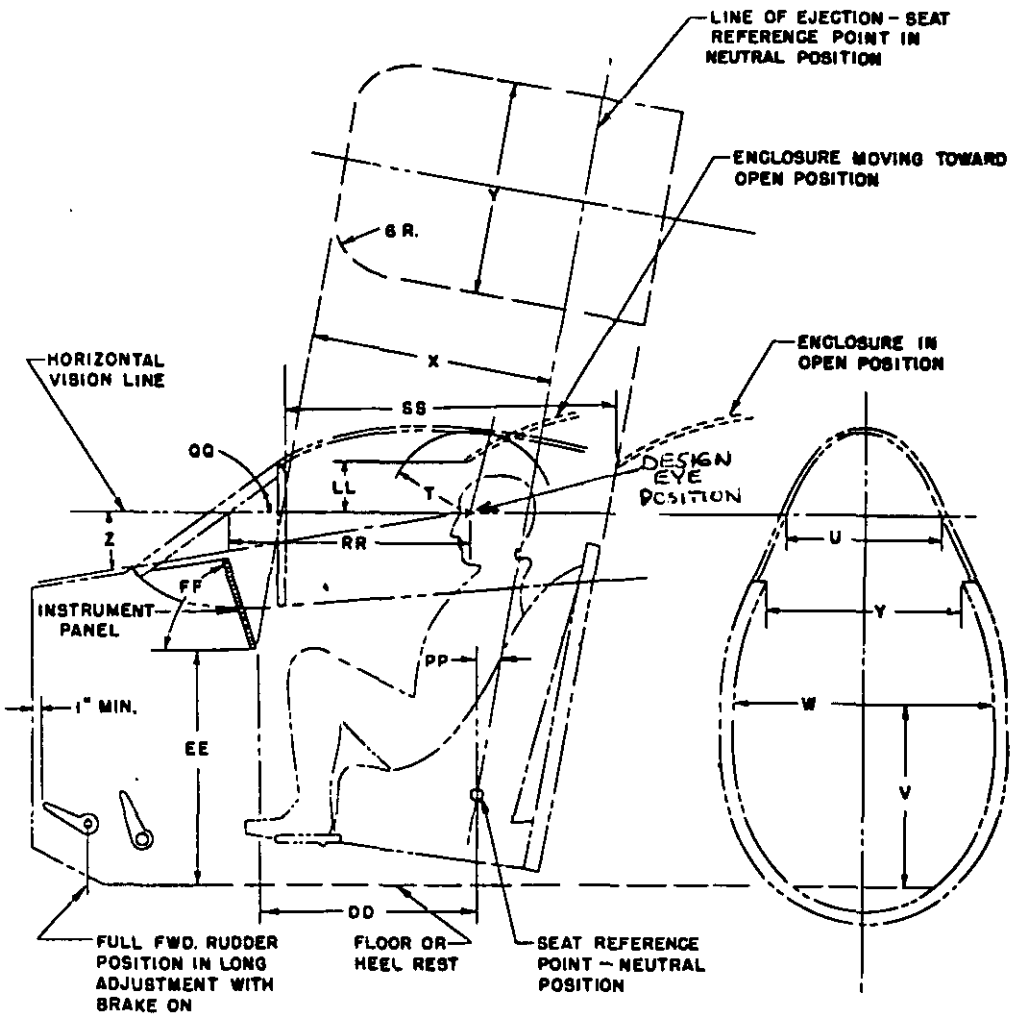


FIGURE - 1 (SHEET 2)

COCKPIT CLEARANCE DIMENSIONS

(SPECIFY DIMENSION VALUES ON SHEET 3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

A. COCKPIT (Cont)

1. GENERAL (Cont)
b. DIMENSIONAL DATA (Cont)

DIMENSION NAME	SYMBOL	DIM.	DIMENSION NAME	SYMBOL	DIM.
COCKPIT SIZE (FLOOR LINE TO EYE)	A		ELBOW HEIGHT	V	
SEAT REF. POINT TO EYE	B		ELBOW CLEARANCE (LAT.)	W	
SEAT ADJUSTMENT (VERT.)	C1		SEAT EJECTION CLEARANCE(FWD.)	X	
SEAT ADJUSTMENT (VERT.)	C2		SEAT EJECTION CLEARANCE(LAT.)	Y	
SEAT ADJUSTMENT(HORIZ.)	D1		DOWNWARD VISION ANGLE	Z	
SEAT ADJUSTMENT(HORIZ.)	D2		SIGHT REFLECTOR POSITION	AA	
SEAT BACK ANGLE	E		SIGHT REFLECTOR HEIGHT	BB	
PILOT DESIGN EYE POSITION	F		SIGHT LENS LOCATION	CC	
STICK (WHEEL) LOCATION	G		INSTRUMENT PANEL POSITION	DD	
STICK (WHEEL) HEIGHT	H		INSTRUMENT PANEL HEIGHT	EE	
STICK (WHEEL) THROW (FWD.)	I		INSTRUMENT PANEL ANGLE	FF	
STICK (WHEEL) THROW (AFT.)	J		BRAKE PEDAL ANGLE	GG	
STICK THROW (LAT.)	K1		RUDDER PEDAL RADIUS	HH	
WHEEL ANGLE	K2		AFT STICK(WHEEL) LOCATION	II	
THROTTLE POSITION (LAT.)	L		WHEEL THROW (LAT.)	JJ	
THROTTLE POSITION(TAKE-OFF)	M1		THROTTLE HEIGHT(TAKE-OFF)	KK1	
THROTTLE POSITION(IDLE)	M2		THROTTLE HEIGHT(IDLE)	KK2	
RUDDER PEDAL POSITION	N		HEAD CLEARANCE FROM MOVING ENCL.	LL	
RUDDER PEDAL HEIGHT	O		PARACHUTE, LIFE RAFT, CUSHION, ETC., THICKNESS	MM	
RUDDER PEDAL ADJUSTMENT(FWD.)	P1		BACK PAD THICKNESS	NN	
RUDDER PEDAL ADJUSTMENT(AFT.)	P2		SEAT BOTTOM ANGLE	OO	
BRAKE PEDAL THROW	Q		SEAT EJECTION ANGLE	PP	
RUDDER PEDAL SPACING	R		WINDSHIELD ANGLE	QQ	
RUDDER PEDAL TRAVEL	S		WINDSHIELD POSITION	RR	
HEAD CLEARANCE RADIUS	T		LONGITUDINAL OPEN ENCL.SPACE	SS	
HEAD CLEARANCE (LAT.)	U				

Figure I (Sheet 3)
COCKPIT DIMENSIONS

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

A. COCKPIT (Cont)

1. GENERAL (Cont)

c. VISION

(1) WHAT IS ANGLE OF PILOT'S DOWN VISION OVER THE NOSE? _____

(2) IS PILOT'S VISION SATISFACTORY FOR TAXIING, TAKEOFF, IN FLIGHT, AND LANDING? _____

(3) IS VISION IN CARRIER APPROACH CONDITION SATISFACTORY? _____

(4) WHAT IS FORWARD VISION LIMITED BY? _____

(5) WHAT IS THE MAXIMUM ANGLE, MEASURED AFT IN A HORIZONTAL PLANE FROM DEAD AHEAD, THROUGH WHICH VISION IS POSSIBLE WITH SHOULDER HARNESS IN PLACE BUT NOT NECESSARILY LOCKED? _____

(6) WHAT IS AFT VISION LIMITED BY? _____

d. CONTROLS

(1) DOES ACTUATION OF ALL CONTROLS FORWARD, UPWARD, OR CLOCKWISE, RESULT IN INCREASED PERFORMANCE OF THE COMPONENT OR THE AIRCRAFT? _____

(2) DOES ACTUATION OF ALL CONTROLS AFT, DOWNWARD, OR COUNTERCLOCKWISE, RESULT IN DECREASED PERFORMANCE OF THE COMPONENT OR THE AIRCRAFT? _____

(3) ARE CONTROLS OF VARIABLE NATURE, INDUCED BY A ROTARY MOTION, ACTUATED CLOCKWISE FROM THE "OFF" POSITION THROUGH "LOW" OR "DIM" TO "HIGH" OR "BRIGHT"? _____

(4) ARE THOSE CONTROLS WHICH THE PILOT MAY BE REQUIRED TO OPERATE DURING LANDING AND TAKEOFF MANEUVERS OR DURING INFLIGHT EMERGENCIES OPERABLE WITH THE SHOULDER HARNESS LOCKED? _____

(5) ARE ALL OTHER CONTROLS WITHIN NORMAL REACH OF THE PILOT(S) WHEN SEATED WITH SEAT BELT FASTENED AND SHOULDER HARNESS IN PLACE BUT NOT NECESSARILY LOCKED? _____

(6) DOES LOCATION, ARRANGEMENT, AND CLEARANCE OF ALL CONTROLS PRECLUDE INADVERTENT SELECTION AND OPERATION? _____

(7) CAN ANY CONTROLS BE COMBINED? _____

(8) CAN ANY CONTROLS BE MADE AUTOMATIC? _____

(9) ARE CONTROLS AND SWITCHES SO SPACED AS TO PERMIT EASY AND ACCURATE OPERATION WITH HEAVILY GLOVED HANDS? _____

(10) DO CONTROL KNOB SHAPES CONFORM TO THE APPLICABLE SPECIFICATION OR STANDARD?

_____

(11) SKETCH CONSOLE LAYOUT AND IDENTIFY ALL CONTROLS, ETC. BY NAME. _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

A. COCKPIT (Cont)

1. GENERAL (Cont)

e. COCKPIT INSTRUCTIONS

(1) ARE PRINTED INSTRUCTIONS HELD TO A MINIMUM? _____

(2) ARE ALL INSTRUCTIONS AND NAMEPLATES LEGIBLE AND READILY VISIBLE TO THE PILOT(S)? _____

(3) HAS PROVISION BEEN MADE TO ILLUMINATE ALL INSTRUCTIONS AND NAMEPLATES?

_____

(4) ARE SEPARATE TAKEOFF AND LANDING CHECKOFF LISTS PROVIDED? _____

(5) ARE CHECKOFF LISTS LEGIBLE? _____

(6) ARE CHECKOFF LIST ITEMS LISTED IN ORDER OF NORMAL OPERATION. _____

(7) ARE ONLY THOSE ITEMS INCLUDED ON THE CHECKOFF LISTS WHICH MUST BE CHECKED FOR SAFETY-OF-FLIGHT REASONS DURING TAKEOFF AND LANDING? _____

f. [illegible]. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

A. COCKPIT (Cont)

2. FLIGHT AND GROUND CONTROLS

a. PRIMARY FLIGHT CONTROLS

(1) LIST THE FOLLOWING INFORMATION FOR PRIMARY FLIGHT CONTROLS:

	LATERAL	DIRECTIONAL	LONGITUDINAL
TYPE			
TRAVEL			
LOCATION OF STOPS			

(2) WHAT TYPE PEDAL ADJUSTMENT IS PROVIDED? _____

(3) IF PEDALS ARE SEPARATELY ADJUSTABLE, HAVE MEANS BEEN PROVIDED TO INDICATE RELATIVE POSITION TO THE PILOT? _____

(4) HOW MUCH PEDAL ADJUSTMENT IS AVAILABLE FORWARD? _____ AFT? _____

(5) IS PEDAL ADJUSTMENT SUFFICIENT? _____

(6) DOES TILT OF PEDALS PERMIT COMFORTABLE APPLICATION OF BRAKES AT ANY PEDAL POSITION? _____

(7) LIST THE BUTTONS OR SWITCHES LOCATED ON THE GRIPS OF THE PRIMARY FLIGHT CONTROLS. _____

_____

(8) CAN THESE BUTTONS OR SWITCHES BE OPERATED EASILY WHILE MAINTAINING PRESSURE ON THE PRIMARY FLIGHT CONTROL? _____

(9) WHAT TYPE OF CONTROL BOOST IS PROVIDED? _____

(10) BY WHAT MEANS IS PILOT WARNED THAT NORMAL BOOST HAS FAILED? _____

_____

(11) HOW DOES THE PILOT ACTUATE THE EMERGENCY BOOST SYSTEM: _____

_____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

A. COCKPIT (Cont)

2. FLIGHT AND GROUND CONTROLS (Cont)

b. TRIM CONTROLS

(1) LIST THE FOLLOWING INFORMATION FOR TRIM CONTROLS:

	LATERAL	DIRECTIONAL	LONGITUDINAL
TYPE			
TRAVEL			
TYPE OF INDICATOR			
LOCATION OF CONTROL			
LOCATION OF INDICATOR			

(2) WHERE ARE STANDBY TRIM TAB ACTUATING CONTROLS LOCATED? _____

c. HIGH LIFT DEVICES

(1) WHAT TYPE OF CONTROL IS PROVIDED? _____

(2) WHERE IS CONTROL LOCATED? _____

(3) WHAT INDICATION OF HIGH LIFT DEVICE POSITION IS PROVIDED? _____

(4) WHERE IS INDICATOR LOCATED? _____

d. SPEED BRAKES

(1) WHAT TYPE OF CONTROL IS PROVIDED? _____

(2) WHERE IS IT LOCATED? _____

(3) CAN INTERMEDIATE POSITIONS BETWEEN "FULL OUT" AND "FULL IN" BE SELECTED?

_____

(4) WHERE IS POSITION INDICATOR LOCATED? _____

_____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the currentversion before use.

A. COCKPIT (Cont)

2. FLIGHT AND GROUND CONTROLS (Cont)

e. AUTO PILOTS

(1) WHAT TYPE OF CONTROL IS PROVIDED? _____

(2) WHERE IS IT LOCATED? _____

(3) WHERE IS ELECTRICAL DISCONNECT LOCATED? _____

f. LANDING GEAR

(1) WHAT TYPE OF CONTROL IS PROVIDED? _____

(2) WHERE IS CONTROL LOCATED? _____

(3) WHAT MEANS ARE PROVIDED TO PREVENT INADVERTENT OPERATION ON THE GROUND?

_____

(4) WHAT TYPE OF OVERRIDE CONTROL IS PROVIDED FOR THE ABOVE? _____

_____

(5) IS THIS OVERRIDE CONTROL READILY ACCESSIBLE? _____

(6) DESCRIBE LOCATION AND ACTUATION OF EMERGENCY LANDING GEAR EXTENSION CONTROL.

_____

_____

(7) WHERE IS THE INDICATOR LOCATED? _____

g. LIST ACTUATION AND LOCATION OF THE FOLLOWING CONTROLS:

CONTROL	ACTUATION	LOCATION
FLIGHT CONTROL LOCK	_____	_____
TAIL WHEEL LOCK	_____	_____
ARRESTING HOOK CONTROL	_____	_____
WING SWEEP CONTROL	_____	_____
WING FOLDING CONTROL	_____	_____
WING LOCKING CONTROL	_____	_____
EMERGENCY BRAKE CONTROL	_____	_____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

A. COCKPIT (Cont)

2. FLIGHT AND GROUND CONTROLS (Cont)
g. (Cont)

CONTROL	ACTUATION	LOCATION
PARKING BRAKE CONTROL		
CANOPY CONTROL		
JETTISONING CONTROL		
NOSEWHEEL STEERING CONTROL		
EMERGENCY ESCAPE CONTROL		

(1) WHERE IS ARRESTING HOOK POSITION INDICATOR LOCATED? _____

(2) WHERE IS WING LOCKED INDICATOR LOCATED? _____

h. DOES THE LOCATION AND ACTUATION OF FLIGHT AND GROUND CONTROLS CONFORM TO THE APPLICABLE SPECIFICATION OR STANDARD? _____ IF NOT, DESCRIBE DIFFERENCES AND STATE REASON THEREFOR: _____

i. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

A. COCKPIT (Cont)

3. PROPULSION SYSTEM CONTROLS

a. LIST THE FOLLOWING INFORMATION FOR PROPULSION SYSTEM CONTROLS:

CONTROL	TYPE	LOCATION
REVERSE THRUST CONTROL		
EXHAUST NOZZLE CONTROL		
PROPELLER CONTROL		
PROPELLER FEATHERING CONTROL		
REVERSE THRUST CONTROL		
MIXTURE CONTROL		
SUPERCHARGER CONTROL		
STARTING CONTROL		
AIR START		
GROUND START		
IGNITION CONTROL		
PRIMER CONTROL		
OIL DILUTION CONTROL		
FUEL INJECTION CONTROL		
COOLING CONTROLS		
COWL FLAP		
INTERCOOLERS		
OIL COOLERS		
INDUCTION AIR CONTROL		
ANTI-ICING		
ALTERNATE AIR		

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

A. COCKPIT (Cont)

3. PROPULSION SYSTEM CONTROLS (Cont)
a. (Cont)

CONTROL	TYPE	LOCATION
FUEL CONTROLS		
TANK SELECTOR	_____	_____
CROSS FEED	_____	_____
BOOST PUMP	_____	_____
FUEL JETTISON	_____	_____
_____	_____	_____
REFUELING CONTROL		
_____	_____	_____
_____	_____	_____
AUX. POWER PLANT	_____	_____

b. ARE CONTROL FRICTION DEVICES EASILY OPERABLE? _____

c. HOW IS INADVERTENT CLOSING OF THE THROTTLE UNDER CATAPULT ACCELERATIONS PREVENTED? _____

d. HAS A DIAGRAMATIC FUEL SYSTEM BEEN PAINTED AROUND THE FUEL SELECTOR? _____

e. DOES THIS PROVIDE A POSITIVE INDICATION OF EXISTING FUEL FLOW? _____

f. HOW IS INADVERTENT POSITIONING OF THE FUEL TANK SELECTOR TO THE "OFF" POSITION PREVENTED? _____

g. DOES REVERSE THRUST CONTROL INCORPORATE A "LIFT-TO-REVERSE" TYPE OF MECHANISM? _____

h. HOW IS AFTERBURNER ACTUATED? _____

i. DOES THE LOCATION AND ACTUATION OF PROPULSION SYSTEM CONTROLS CONFORM TO THE APPLICABLE SPECIFICATION OR STANDARD? _____ IF NOT, DESCRIBE DIFFERENCES AND STATE REASONS THEREFOR: _____

_____

j. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the currentversion before use.

A. COCKPIT (Cont)

4. ARMAMENT

a. LIST THE FOLLOWING INFORMATION FOR ARMAMENT CONTROLS:

CONTROL	TYPE	LOCATION
MASTER ARMING CONTROL		
GUN CONTROLS		
CHARGING		
FIRING		
SIGHT		
SIGHT RHEOSTAT		
HEATER		
BOMB CONTROLS		
ARMING		
RELEASE		
MANUAL RELEASE		
ROCKET CONTROLS		
ARMING		
FIRING		
SELECTOR		
FLOAT LIGHT RELEASE		
SONOBUOY RELEASE		

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

A. COCKPIT (Cont)

4. ARMAMENT (Cont)

b. MUST EYE POSITION BE SHIFTED FROM NORMAL FLYING POSITION IN ORDER TO GET PROPER RETICLE VISION FOR GUNS, ROCKETS, AND BOMBING? _____

c. WHEN EYE POSITION IS SATISFACTORY FOR RETICLE VISION, WHAT INSTRUMENTS OR CONTROLS THAT MUST BE USED DURING ATTACK MANEUVERS ARE HIDDEN? _____

_____

d. CAN GUNSIGHT BULB BE READILY REPLACED WITH SPARE BULB? _____

e. CAN GUNSIGHT DEHYDRATING COMPOUND BE READILY SEEN AND REPLACED? _____

f. IS CLEARANCE BETWEEN GUNSIGHT AND SEAT EJECTION PATH SATISFACTORY? _____

g. HAS UNNECESSARY SIMILARITY BETWEEN ARMAMENT CONTROLS AND OTHER CONTROLS BEEN AVOIDED? _____

h. IS LOCATION OF ARMAMENT CONTROLS SUCH THAT INADVERTENT OPERATION DURING TAKEOFF, LANDING, CRUISE, ENTRANCE TO THE COCKPIT, ETC., WILL BE UNLIKELY?

_____

i. CAN PILOT MANUALLY RELEASE EXTERNAL STORES WHILE MAINTAINING NORMAL FORWARD VISIBILITY OUT OF THE AIRPLANE? _____

j. DOES THE LOCATION AND ACTUATION OF ARMAMENT CONTROLS CONFORM TO THE APPLICABLE SPECIFICATION OR STANDARD? _____ IF NOT, DESCRIBE DIFFERENCES AND STATE REASONS THEREFOR: _____

_____

_____

k. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

A. COCKPIT (Cont)

5. ELECTRICAL AND ELECTRONICS

a. ELECTRICAL

(1) SPECIFY LOCATION OF THE FOLLOWING ELECTRICAL CONTROLS

CONTROL	LOCATION
BATTERY	_____
GENERATOR	_____
EXTERIOR LIGHTING	_____
MASTER SWITCH	_____
INTERIOR LIGHTING	_____
LANDING LIGHTS	_____
CIRCUIT BREAKER PANELS	_____
_____	_____
_____	_____

(2) IS MASTER EXTERNAL LIGHT SWITCH EASILY ACCESSIBLE FOR CARRIER TAKEOFF AND LANDING? _____

(3) ARE THE FILAMENTS AND POSITION OF THE LANDING LIGHTS CONTROLLED BY SEPARATE SWITCHES? _____

(4) ARE THE "ON" AND "EXTEND" POSITIONS OF THE LANDING LIGHT SWITCHES REACHED BY MOVEMENT IN THE SAME DIRECTION? _____

(5) ARE THOSE CIRCUIT BREAKERS WHICH ARE ESSENTIAL TO SAFETY-OF-FLIGHT INSTALLED SO THAT THEY ARE READILY IDENTIFIABLE BY THE PILOT? _____

(6) WHERE ARE ADDITIONAL CIRCUIT BREAKERS LOCATED? _____

(7) HAVE THE CIRCUIT BREAKERS BEEN ARRANGED ON A SYSTEMS BASIS? _____

b. COMMUNICATION

(1) WHERE IS PRIMARY COMMUNICATION CONTROL BOX (UHF OR VHF) LOCATED? _____

_____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

A. COCKPIT (Cont)

5. ELECTRICAL AND ELECTRONICS (Cont)

b. COMMUNICATION (Cont)

(2) DOES THIS LOCATION PERMIT THE PILOT TO OPERATE THE CONTROL SAFELY DURING A CRITICAL TIME OR DURING FINAL APPROACH? _____

(3) CAN THE PILOT READ THE CONTROL BOX DIAL EASILY? _____

(4) ARE INTER-PHONE PROVISIONS ADEQUATE? _____

(5) IN CASE OF POWER FAILURE, WHAT OTHER MEANS ARE AVAILABLE TO THE PILOT FOR ATTRACTING THE ATTENTION OF ALL CREW MEMBERS? _____

_____

(6) ARE PROVISIONS MADE FOR THE STOWAGE OF HEADSETS AND MICROPHONES? _____

c. NAVIGATION

(1) WHERE IS PRIMARY NAVIGATION CONTROL BOX LOCATED? _____

(2) DOES THIS LOCATION PERMIT PILOT TO SELECT STATIONS OR CHANNELS RAPIDLY?

_____

(3) SPECIFY LOCATION OF OTHER NAVIGATION CONTROL BOXES. _____

_____

d. RADAR

(1) WHERE IS CONTROL BOX LOCATED? _____

(2) DOES THIS LOCATION PERMIT PILOT TO CHECK KNOB POSITION EASILY BOTH VISUALLY AND TACTUALLY? _____

(3) WHERE IS THE "RADAR-OUT" OR "GATES-OUT" SWITCH LOCATED? _____

_____

(4) MAY SCOPE BRIGHTNESS AND FOCUS BE ADJUSTED BY THE PILOT? _____

(5) IS ADEQUATE SHADING PROVIDED FOR RADAR SCOPES? _____

(6) IS PROVISION MADE FOR STOWAGE OF VISORS? _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

A. COCKPIT (Cont)

5. ELECTRICAL AND ELECTRONICS (Cont)

e. DOES THE LOCATION AND ACTUATION OF ELECTRICAL AND ELECTRONICS CONTROLS CONFORM TO THE APPLICABLE SPECIFICATION OR STANDARD? _____ IF NOT, DESCRIBE DIFFERENCES AND STATE REASONS THEREFOR: _____

_____

_____

_____

f. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

A. COCKPIT (Cont)

6. INSTRUMENT PANEL

a. ARE ALL INSTRUMENTS AND MARKINGS THEREON VISIBLE AND READABLE FROM ALL NORMAL SEAT POSITIONS? _____

(1) DOES CONTROL STICK OR WHEEL INTERFERE WITH VIEW OF INSTRUMENTS? _____

(2) ARE ANY OF THE INSTRUMENTS REQUIRED FOR LANDING OBSCURED WHEN SEAT IS RAISED TO FULL UP POSITION? _____ IF SO, LIST ALL OBSTRUCTIONS, AND THE INSTRUMENTS OBSCURED? _____

_____

b. LIST AND DESCRIBE LOCATION OF ALL WARNING LIGHTS (WARNING LIGHTS ARE DEFINED AS THOSE LIGHTS WHICH INDICATE THE EXISTENCE OF A HAZARDOUS CONDITION REQUIRING IMMEDIATE CORRECTION ACTION).

WARNING LIGHTS	LOCATION
_____	_____
_____	_____
_____	_____
_____	_____

c. LIST AND DESCRIBE LOCATION OF ALL CAUTION LIGHTS (CAUTION LIGHTS ARE DEFINED AS THOSE LIGHTS WHICH SERVE TO ALERT THE OPERATOR TO AN IMPENDING DANGEROUS CONDITION REQUIRING ATTENTION BUT NOT NECESSARILY IMMEDIATE ACTION).

MASTER CAUTION LIGHT LOCATION _____

CAUTION LIGHTS SUB-PANEL LOCATION _____

CAUTION SUB-PANEL LEGENDS:

1. _____	6. _____	11. _____
2. _____	7. _____	12. _____
3. _____	8. _____	13. _____
4. _____	9. _____	14. _____
5. _____	10. _____	15. _____

d. ARE WARNING AND CAUTION LIGHTS THE DIRECT READING TYPE? _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

A. COCKPIT (Cont)

6. INSTRUMENT PANEL (Cont)

e. LIST AND DESCRIBE LOCATION OF ALL INDICATOR LIGHTS INCLUDING ANGLE OF ATTACK INDEXER (INDICATOR LIGHTS ARE DEFINED AS THOSE LIGHTS WHICH SERVE TO SHOW THE STATUS OF SOME EQUIPMENT, OPERATION, OR FUNCTION).

INDICATOR LIGHTS	LOCATION

f. LIST AND DESCRIBE LOCATION OF ALL VISUAL INDICATORS OTHER THAN LIGHTS.

VISUAL INDICATORS	LOCATION

g. DOES THE LAYOUT OF THE INSTRUMENT PANEL CONFORM TO THE APPLICABLE SPECIFICATION OR STANDARD? _____ IF NOT, DESCRIBE DIFFERENCES AND STATE REASONS THEREFORE BELOW: _____

h. SKETCH INSTRUMENT PANEL LAYOUT AND IDENTIFY INSTRUMENTS BY NAME AND STOCK NUMBER. _____

i. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

A. COCKPIT (Cont)

7. MISCELLANEOUS CONTROLS AND EQUIPMENT

a. OXYGEN SYSTEM CONTROLS

(1) WHERE ARE OXYGEN SYSTEM CONTROLS LOCATED? _____

(2) IS THE OXYGEN FLOW INDICATOR READILY VISIBLE TO THE PILOT? _____

(3) IS IT POSSIBLE TO MOVE A CONTROL OR TO ADJUST THE SEAT TO SUCH A POSITION THAT THE OXYGEN FLOW INDICATOR IS OBSCURED? _____

(4) ARE OXYGEN SYSTEM CONTROLS AND FLOW INDICATOR ILLUMINATED? _____

b. FIRE EXTINGUISHER SYSTEM CONTROLS:

(1) WHAT TYPE OF CONTROLS ARE PROVIDED? _____

(2) WHERE ARE THEY LOCATED? _____

(3) DO THE CONTROL KNOBS INCORPORATE A LIGHT WHICH IS ILLUMINATED WHEN THE FIRE WARNING SYSTEM FOR THE AREA IS ACTUATED? _____

(4) ARE FIRE WARNING INDICATORS AND DETECTOR TEST SWITCHES LOCATED NEAR THE CONTROL? _____

c. COMPOSITE QUICK DISCONNECT

(1) WHERE IS COMPOSITE QUICK DISCONNECT RECEPTACLE LOCATED? _____

_____

(2) LIST ATTACHMENTS TO THE COMPOSITE QUICK DISCONNECT RECEPTACLE _____

_____

d. REAR VIEW MIRROR:

(1) IS MIRROR READILY ADJUSTABLE? _____

(2) WHAT ANGLE OF VISION WILL ADJUSTMENT PROVIDE IN HORIZONTAL FIELD? _____

IN VERTICAL FIELD? _____ DOWN FROM THRUST LINE? _____

(3) DOES THE MIRROR INTERFERE WITH PERSONNEL DURING INGRESS OR EGRESS? _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

A. COCKPIT (Cont)

7. MISCELLANEOUS CONTROLS AND EQUIPMENT (Cont)

e. STATE THE LOCATION OF THE FOLLOWING CONTROLS AND EQUIPMENT:

CONTROL OR EQUIPMENT	LOCATION
CABIN AIR CONDITIONING	_____
CABIN PRESSURIZATION	_____
CABIN ALTIMETER	_____
SHOULDER HARNESS LOCK	_____
SEAT ADJUSTMENT	_____
DE-ICING	_____
ANTI-ICING	_____
PITOT HEAT	_____
ANTI-G SUIT CONTROL	_____
FIRST AID KIT	_____
MAP CASE	_____
RELIEF TUBE	_____
CHART BOARD	_____
PRESSURE SUIT/ANTI-EXPOSURE SUIT VENTILATION	_____
_____	_____

f. DOES THE LOCATION AND ACTUATION OF MISCELLANEOUS CONTROLS CONFORM TO THE APPLICABLE SPECIFICATION OR STANDARD? _____ IF NOT, DESCRIBE DIFFERENCES AND STATE REASONS THEREFORE BELOW: _____

_____

_____

g. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

B. SAFETY OF CREW

1. LIST EACH CREW MEMBER'S STATION FOR THE FOLLOWING CONDITIONS:

CREW MEMBER	CREW MEMBER'S STATION		
	TAKEOFF	NORMAL LANDING	DITCHING

2. DESCRIBE MEANS OF EMERGENCY EGRESS FOR EACH CREW MEMBER UNDER THE FOLLOWING CONDITIONS:

CREW MEMBER	MEANS OF EGRESS	
	IN FLIGHT	AFTER DITCHING OR ON GROUND

3. DESCRIBE ANY CHARACTERISTICS OF THE AIRCRAFT OR INSTALLATIONS THAT MAY ENDANGER THE CREW:

4. REMARKS.-

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

C. ACCESS

1. ENTRANCE DOORS

(a) LIST EACH ENTRANCE DOOR AS FOLLOWS:

LOCATION	SIZE	JETTISONABLE

(b) WHAT MEANS ARE PROVIDED FOR REACHING ENTRANCE DOORS FROM OUTSIDE (OR FOR BOARDING SEAPLANES)? _____

(c) CAN ALL OF THE ABOVE DOORS BE READILY LATCHED AND UNLATCHED FROM INSIDE THE AIRCRAFT?

_____

(d) CAN THE MAIN ENTRANCE DOOR BE LOCKED WITH A KEY FROM THE OUTSIDE? _____

(e) WHAT MEANS ARE USED FOR JETTISONING THE DOORS? _____

_____

(f) ARE JETTISONING CONTROLS READILY OPERATED AND SATISFACTORILY PLACARDED? _____

(g) IS THERE ANY DANGER OF FOULING GEAR OR CLOTHING DURING ESCAPE OR PARATROOP OPERATIONS? _____

2. HATCHES

(a) LIST EACH PERSONNEL HATCH AS FOLLOWS:

LOCATION	SIZE	JETTISONABLE

(b) CAN ALL OF THE ABOVE HATCHES BE READILY LATCHED AND UNLATCHED FROM INSIDE THE AIRPLANE? _____

(c) WHAT MEANS ARE USED FOR JETTISONING THE HATCHES? _____

_____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

C. ACCESS (Cont)

2. HATCHES (Cont)

(d) ARE JETTISONING CONTROLS READILY OPERATED AND SATISFACTORILY PLACARDED? _____

(e) IS THERE ANY DANGER OF FOULING GEAR OR CLOTHING DURING ESCAPE? _____

3. STEPS

(a) ARE STEPS ADEQUATE FOR LARGE FOUL WEATHER BOOTS? _____

(b) LIST EACH STEP ON SIDE OF FUSELAGE (OR HULL) AS FOLLOWS:

LOCATION	TYPE	ACCESS TO

4. HANDGRIPS

(a) ARE HANDGRIPS ADEQUATE FOR LARGE GLOVES? _____

(b) LIST EACH HANDGRIP ON SIDE OF FUSELAGE (OR HULL) AS FOLLOWS:

LOCATION	TYPE	ACCESS TO

5. WALKWAYS

(a) LIST WALKWAYS AS FOLLOWS:

LOCATION	TYPE	ACCESS TO

6. PORTABLE LADDERS

(a) WHAT PORTABLE LADDERS ARE REQUIRED? _____

_____

(b) IS STOWAGE PROVIDED IN THE AIRCRAFT? _____

7. REMARKS.-

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 20260-17T10:44Z
Check the source to verify that this is the current version before use.

D. ATMOSPHERIC PROTECTION SYSTEM

1. GENERAL

a. WHAT TYPE OXYGEN SYSTEM IS PROVIDED? _____

b. IS ANY PART OF THE SYSTEM IN CLOSE PROXIMITY TO FUEL, OIL OR HYDRAULIC SYSTEMS OR SUBJECT TO DRIPPING OIL, WATER, ETC? _____

c. IS FILLER CONNECTION CONVENIENTLY LOCATED? _____

d. ARE CONTAINERS PROVIDED FOR STOWING OXYGEN MASKS? _____

2. CYLINDERS/CONVERTERS

a. LIST THE FOLLOWING INFORMATION:

QUANTITY	SIZE	LOCATION	PROTECTION

b. IF CYLINDERS ARE UNPROTECTED, ARE THEY MOUNTED WITH THE LONGITUDINAL AXIS APPROXIMATELY PARELLEL TO CENTERLINE OF AIRCRAFT? _____

(1) ARE PERSONNEL AND ESSENTIAL EQUIPMENT PROTECTED FROM FLASH DUE TO CYLINDERS BEING HIT BY GUNFIRE? _____

c. ARE ALL CYLINDERS/CONVERTERS READILY ACCESSIBLE? _____

d. CAN EACH CYLINDER/CONVERTER BE REPLACED IN SPECIFIED TIME? _____

e. HOW IS EACH CYLINDER VALVE OPERATED? _____

f. WHERE ARE CONVERTER VENT OUTLETS LOCATED? _____

(1) IF MANUAL, CAN EACH BE READILY OPERATED BY PERSONNEL DURING FLIGHT? _____

3. DILUTER DEMAND REGULATORS

a. WHERE ARE REGULATORS INSTALLED? _____

b. CAN REGULATORS AND FLOW INDICATORS BE CONVENIENTLY SEEN AND OPERATED? _____

c. IS ANY REGULATOR SUBJECT TO ACCIDENTAL DAMAGE OR OPERATION? _____

d. IN A-2 SYSTEMS, IS THE HIGH PRESSURE GAGE REMOVED FROM EACH REGULATOR? _____

4. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

E. RADIO OPERATOR'S STATION

1. SEAT

2. CONTROLS

a. DOES ACTUATION OF ALL CONTROLS FORWARD, UPWARD, OR CLOCKWISE WITH REFERENCE TO OPERATOR, RESULT IN INCREASED PERFORMANCE OF THE COMPONENT OR THE AIRCRAFT? _____

b. DOES ACTUATION OF ALL CONTROLS AFT, DOWNWARD, OR COUNTERCLOCKWISE WITH REFERENCE TO OPERATOR, RESULT IN DECREASED PERFORMANCE OF THE COMPONENT OR THE AIRCRAFT? _____

c. ARE CONTROLS OF A VARIABLE NATURE, INDUCED BY A ROTORY MOTION, ACTUATED CLOCKWISE FROM THE "OFF" POSITION THROUGH "LOW" OR "DIM" TO "HIGH" OR "BRIGHT"? _____

d. ARE ALL CONTROLS WITHIN NORMAL REACH OF THE RADIO OPERATOR WHEN SEATED WITH SEAT BELT FASTENED? _____

e. DOES LOCATION, ARRANGEMENT, AND CLEARANCE OF ALL CONTROLS PRECLUDE INADVERTENT SELECTION AND OPERATION? _____

f. ARE CONTROLS AND SWITCHES SPACED TO PERMIT EASY AND ACCURATE OPERATION WITH HEAVILY GLOVED HANDS? _____

g. ARE ADEQUATE INSTRUCTIONS AND NAMEPLATES PROVIDED ON OR ADJACENT TO ALL CONTROLS REQUIRING THEM? _____

h. ARE ALL INSTRUCTIONS AND NAMEPLATES LEGIBLE AND READILY VISIBLE TO THE RADIO OPERATOR IN DAYLIGHT? _____

i. CAN ANY CONTROLS BE COMBINED? _____

j. CAN ANY CONTROLS BE MADE AUTOMATIC? _____

k. SKETCH CONSOLE LAYOUTS AND IDENTIFY ALL CONTROLS, ETC. BY NAME.

l. REMARKS. -

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

E. RADIO OPERATOR'S STATION (Cont)

3. INSTRUMENTS

a. WHERE ARE INSTRUMENTS LOCATED? _____

b. ARE ALL INSTRUMENTS AND MARKINGS THEREON VISIBLE AND READABLE FROM THE NORMALLY OCCUPIED POSITION? _____

c. SKETCH INSTRUMENT PANEL AND IDENTIFY INSTRUMENTS BY NAME AND STOCK NUMBERS.

d. REMARKS. -

4. MISCELLANEOUS

a. IS PROVISION MADE FOR STOWAGE OF HEADPHONES? _____

b. IS LOCATION OF KEY CONVENIENT TO RADIO OPERATOR? _____

c. ARE SUFFICIENT RECEPTACLES PROVIDED? _____

d. ARE LOCATIONS OF RECEPTACLES SATISFACTORY? _____

e. ARE INTERPHONE PROVISIONS ADEQUATE? _____

f. REMARKS. -

5. IS GENERAL ARRANGEMENT, LOCATION, ETC. OF THE RADIO OPERATOR'S STATION CONSIDERED ADEQUATE? _____

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

F. RADAR OPERATOR'S STATION

1. SEAT

2. CONTROLS

a. DOES ACTUATION OF ALL CONTROLS FORWARD, UPWARD, OR CLOCKWISE WITH REFERENCE TO OPERATOR, RESULT IN INCREASED PERFORMANCE OF THE COMPONENT OR THE AIRCRAFT? _____

b. DOES ACTUATION OF ALL CONTROLS AFT, DOWNWARD, OR COUNTERCLOCKWISE WITH REFERENCE TO OPERATOR, RESULT IN DECREASED PERFORMANCE OF THE COMPONENT OR THE AIRCRAFT? _____

c. ARE CONTROLS OF A VARIABLE NATURE, INDUCED BY A ROTORY MOTION, ACTUATED CLOCKWISE FROM THE "OFF" POSITION THROUGH "LOW" OR "DIM" TO "HIGH" OR "BRIGHT"? _____

d. ARE ALL CONTROLS WITHIN NORMAL REACH OF THE RADAR OPERATOR WHEN SEATED WITH SEAT BELT FASTENED? _____

e. DOES LOCATION, ARRANGEMENT, AND CLEARANCE OF ALL CONTROLS PRECLUDE INADVERTENT SELECTION AND OPERATION? _____

f. ARE CONTROLS AND SWITCHES SPACED TO PERMIT EASY AND ACCURATE OPERATION WITH HEAVILY GLOVED HANDS? _____

g. ARE ADEQUATE INSTRUCTIONS AND NAMEPLATES PROVIDED ON OR ADJACENT TO ALL CONTROLS REQUIRING IT? _____

h. ARE ALL INSTRUCTIONS AND NAMEPLATES LEGIBLE AND READILY VISIBLE TO THE RADAR OPERATOR IN DAYLIGHT? _____

i. CAN ANY CONTROLS BE COMBINED? _____

j. CAN ANY CONTROLS BE MADE AUTOMATIC? _____

k. SKETCH CONSOLE LAYOUT AND IDENTIFY ALL CONTROLS, ETC. BY NAME.

l. REMARKS. -

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

F. RADAR OPERATOR'S STATION (Cont)

3. INSTRUMENTS

a. WHERE ARE INSTRUMENTS LOCATED? _____

b. ARE ALL INSTRUMENTS AND MARKINGS THEREON VISIBLE AND READABLE FROM THE NORMALLY OCCUPIED POSITION? _____

c. SKETCH INSTRUMENT PANEL AND IDENTIFY INSTRUMENTS BY NAME AND STOCK NUMBER.

d. REMARKS. -

4. MISCELLANEOUS

a. IS PROVISION MADE FOR STOWAGE OF HEADPHONES? _____

b. IS LOCATION OF KEY CONVENIENT TO RADAR OPERATOR? _____

c. ARE SUFFICIENT RECEPTACLES PROVIDED? _____

d. ARE LOCATIONS OF RECEPTACLES SATISFACTORY? _____

e. ARE INTERPHONE PROVISIONS ADEQUATE? _____

f. REMARKS. -

5. IS GENERAL ARRANGEMENT, LOCATION, ETC. OF THE RADAR OPERATOR'S STATION CONSIDERED ADEQUATE? _____

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

G. NAVIGATOR'S STATION

1. SEAT

2. INSTRUMENTS

   a. WHERE ARE INSTRUMENTS LOCATED? _____

   b. ARE ALL INSTRUMENTS AND MARKINGS THEREON VISIBLE AND READABLE FROM THE NORMALLY OCCUPIED POSITION? _____

   c. SKETCH INSTRUMENT PANEL AND IDENTIFY INSTRUMENTS BY NAME AND STOCK NUMBER.

   d. REMARKS. -

3. NAVIGATION EQUIPMENT

   a. IS ADEQUATE STOWAGE PROVIDED FOR NAVIGATION EQUIPMENT? _____

   b. REMARKS. -

4. COMMUNICATION

   a. WHAT COMMUNICATION IS PROVIDED BETWEEN THE NAVIGATOR AND THE FOLLOWING CREW MEMBERS?

      PILOT _____

      CO-PILOT/NFO _____

      MAD OPERATOR _____

      ECM OPERATOR _____

      RADAR OPERATOR _____

      SONOBOUY OPERATOR _____

      CIC OPERATOR _____

   b. WILL COMMUNICATION WITH MAD OPERATOR, ECM OPERATOR, AND RADAR OPERATOR PERMIT THE NAVIGATOR TO MAINTAIN HIS ASW PLOT WITH MINIMUM DELAY? _____

   c. ARE INTERPHONE PROVISIONS ADEQUATE? _____

   d. REMARKS. -

5. IS GENERAL ARRANGEMENT, LOCATION, ETC. OF NAVIGATOR'S STATION CONSIDERED ADEQUATE? _____

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

H. FLIGHT ENGINEER'S STATION

1. SEAT

2. CONTROLS

a. WHAT PROPULSION SYSTEM CONTROLS ARE PROVIDED?

_____ _____ _____

_____ _____ _____

_____ _____ _____

_____ _____ _____

b. DOES ACTUATION OF ALL CONTROLS FORWARD, UPWARD, OR CLOCKWISE WITH REFERENCE TO OPERATOR, RESULT IN INCREASED PERFORMANCE OF THE COMPONENT OR THE AIRCRAFT? _____

c. DOES ACTUATION OF ALL CONTROLS AFT, DOWNWARD, OR COUNTERCLOCKWISE WITH REFERENCE TO OPERATOR, RESULT IN DECREASED PERFORMANCE OF THE COMPONENT OR THE AIRCRAFT? _____

d. ARE CONTROLS OF A VARIABLE NATURE, INDUCED BY A ROTORY MOTION, ACTUATED CLOCKWISE FROM THE "OFF" POSITION THROUGH "LOW" OR "DIM" TO "HIGH" OR "BRIGHT"? _____

e. ARE ALL CONTROLS WITHIN NORMAL REACH OF THE FLIGHT ENGINEER WHEN SEATED WITH SEAT BELT FASTENED? _____

f. DOES LOCATION, ARRANGEMENT, AND CLEARANCE OF ALL CONTROLS PRECLUDE INADVERTENT SELECTION AND OPERATION? _____

g. ARE CONTROLS AND SWITCHES SPACED TO PERMIT EASY AND ACCURATE OPERATION WITH HEAVILY GLOVED HANDS? _____

h. ARE ADEQUATE INSTRUCTIONS AND NAMEPLATES PROVIDED ON OR ADJACENT TO ALL CONTROLS REQUIRING IT? _____

i. ARE ALL INSTRUCTIONS AND NAMEPLATES LEGIBLE AND READILY VISIBLE TO THE FLIGHT ENGINEER IN DAYLIGHT? _____

j. CAN ANY CONTROLS BE COMBINED? _____

k. CAN ANY CONTROLS BE MADE AUTOMATIC? _____

l. SKETCH CONSOLE LAYOUT AND IDENTIFY ALL CONTROLS, ETC. BY NAME.

m. REMARKS. -

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the currentversion before use.

H. FLIGHT ENGINEER'S STATION (Cont)

3. INSTRUMENTS

a. WHERE ARE INSTRUMENTS LOCATED? _____

b. IS THERE A CONSISTENCY OF POSITION OF INDICATING INSTRUMENTS? _____

c. ARE ALL INSTRUMENTS AND MARKINGS THEREON VISIBLE AND READABLE FROM THE NORMALLY OCCUPIED POSITION? _____

d. SKETCH INSTRUMENT PANEL AND IDENTIFY INSTRUMENTS BY NAME AND STOCK NUMBER.

e. REMARKS. -

4. MISCELLANEOUS

a. ARE INTERPHONE PROVISIONS ADEQUATE? _____

b. ARE CHECKOFF LISTS PROVIDED FOR STARTING, TAKEOFF AND LANDING? _____

c. ARE STARTING PROVISIONS FOR THE AUXILIARY POWER PLANT ADEQUATE? _____

d. REMARKS. -

5. IS GENERAL ARRANGEMENT, LOCATION, ETC. OF THE FLIGHT ENGINEER'S STATION CONSIDERED ADEQUATE? _____

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 20261O-17T10:44Z
Check the source to verify that this is the current version before use.

I. CIC OPERATOR'S STATION

1. SEAT

2. CONTROLS

a. DOES ACTUATION OF ALL CONTROLS FORWARD, UPWARD, OR CLOCKWISE WITH REFERENCE TO THE OPERATOR, RESULT IN INCREASED PERFORMANCE OF THE COMPONENT OR THE AIRCRAFT? _____

b. DOES ACTUATION OF ALL CONTROLS AFT, DOWNWARD, OR COUNTERCLOCKWISE WITH REFERENCE TO THE OPERATOR, RESULT IN DECREASED PERFORMANCE OF THE COMPONENT OR THE AIRCRAFT? _____

c. ARE CONTROLS OF A VARIABLE NATURE, INDUCED BY A ROTORY MOTION, ACTUATED CLOCKWISE FROM THE "OFF" POSITION THROUGH "LOW" OR "DIM" TO "HIGH" OR "BRIGHT"? _____

d. ARE ALL CONTROLS WITHIN NORMAL REACH OF THE CIC OPERATOR WHEN SEATED WITH BELT FASTENED? _____

e. DOES LOCATION, ARRANGEMENT, AND CLEARANCE OF ALL CONTROLS PRECLUDE INADVERTENT SELECTION AND OPERATION? _____

f. ARE CONTROLS AND SWITCHES SPACED TO PERMIT EASY AND ACCURATE OPERATION WITH HEAVILY GLOVED HANDS? _____

g. ARE ADEQUATE INSTRUCTIONS AND NAMEPLATES PROVIDED ON OR ADJACENT TO ALL CONTROLS REQUIRING IT? _____

h. ARE ALL INSTRUCTIONS AND NAMEPLATES LEGIBLE AND READILY VISIBLE TO THE CIC OPERATOR IN DAYLIGHT? _____

i. CAN ANY CONTROLS BE COMBINED? _____

j. CAN ANY CONTROLS BE MADE AUTOMATIC? _____

k. SKETCH CONSOLE LAYOUT AND IDENTIFY ALL CONTROLS, ETC. BY NAME.

l. REMARKS. -

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

I. CIC OPERATOR'S STATION (Cont)

3. INSTRUMENTS

a. WHERE ARE INSTRUMENTS LOCATED? _____

b. ARE ALL INSTRUMENTS AND MARKINGS THEREON VISIBLE AND READABLE FROM THE NORMALLY OCCUPIED POSITION? _____

c. SKETCH INSTRUMENT PANEL AND IDENTIFY INSTRUMENTS BY NAME AND STOCK NUMBER.

d. REMARKS. -

4. MISCELLANEOUS

a. IS PROVISION MADE FOR STOWAGE OF HEADPHONES? _____

b. IS LOCATION OF KEY CONVENIENT TO CIC OPERATOR? _____

c. ARE SUFFICIENT RECEPTACLES PROVIDED? _____

d. ARE LOCATIONS OF RECEPTACLES SATISFACTORY? _____

e. ARE INTERPHONE PROVISIONS ADEQUATE? _____

f. REMARKS. -

5. IS GENERAL ARRANGEMENT, LOCATION, ETC. OF CIC OPERATOR'S STATION CONSIDERED ADEQUATE? _____

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

J. FURNISHINGS AND EQUIPMENT

1. LITTERS

a. WHAT TYPE LITTERS ARE PROVIDED? _____

b. IS VERTICAL DISTANCE BETWEEN LITTERS AT LEAST 17 INCHES? _____

c. DOES HIGHEST LITTER EXCEED 78 INCHES ABOVE AN INFLIGHT STABLE SURFACE? _____

d. IS AISLE SPACE BETWEEN LITTERS AT LEAST 24 INCHES WIDE? _____

e. DOES INSTALLATION PERMIT MAXIMUM FLEXIBILITY IN CARRYING LITTER PATIENTS?

_____

f. DO LITTER STRAPS AND FITTINGS CONFORM WITH USAF DWG. AD-13? _____

g. WHERE ARE LITTER STRAPS STOWED? _____

2. PERSONNEL EQUIPMENT

a. WHAT STOWAGE IS PROVIDED FOR DETACHABLE PARACHUTES? _____

b. WHAT TOILET FACILITIES ARE PROVIDED? _____

c. WHAT LOCKERS FOR FOOD ARE PROVIDED? _____

d. WHAT DRINKING WATER CONTAINERS ARE PROVIDED? _____

e. WHAT COOKING FACILITIES ARE PROVIDED? _____

f. IS A REFRIGERATOR PROVIDED? _____

g. ARE LOCKERS OR COMPARTMENTS PROVIDED FOR PERSONAL EFFECTS? _____

3. LIFE RAFTS

a. LIST THE FOLLOWING INFORMATION:

SIZE	LOCATION	LOCATION OF SUBMERSION ACTUATOR	LOCATION OF MANUAL CONTROL

b. CAN THE RAFT AND EMERGENCY EQUIPMENT BE REMOVED FROM AT LEAST ONE COMPARTMENT TO THE INSIDE OF THE AIRCRAFT FOR DROPPING? _____

c. WHAT MEANS ARE PROVIDED FOR INSPECTING THE RAFT AND EMERGENCY EQUIPMENT PRIOR TO EACH FLIGHT? _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

J. FURNISHINGS AND EQUIPMENT (Cont)

3. LIFE RAFTS (Cont)

d. WHAT TYPE OF LATCH IS INCORPORATED ON EACH COMPARTMENT HATCH? _____

e. HOW IS SECURITY OF EACH HATCH ASCERTAINED PRIOR TO FLIGHT? _____

f. ARE MANUAL CONTROLS PROPERLY GUARDED AND IDENTIFIED? _____

4. CREW SEATS(OTHER THAN SEATS IN COCKPIT), PASSENGER SEATS, TROOP BENCHES AND BUNKS

a. LIST THE FOLLOWING APPLICABLE INFORMATION:

	CREW SEATS	PASSENGER SEATS	TROOP BENCHES	BUNKS
TYPE				
METHOD OF ATTACH.				
ADJUSTMENT				
METHOD OF STOWING				
TYPE SAFETY BELT				

b. DO CREW SEATS HAVE SHOULDER HARNESS, HEAD REST, AND INERTIA REEL? _____

c. WHAT EQUIPMENT ARE CREW SEATS DESIGNED FOR? _____

_____

5. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

K. STATION

1. SEAT

2. CONTROLS

a. DOES ACTUATION OF ALL CONTROLS FORWARD, UPWARD, OR CLOCKWISE WITH REFERENCE TO OPERATOR, RESULT IN INCREASED PERFORMANCE OF THE COMPONENT OR THE AIRCRAFT? _____

b. DOES ACTUATION OF ALL CONTROLS AFT, DOWNWARD, OR COUNTERCLOCKWISE WITH REFERENCE TO OPERATOR RESULT IN DECREASED PERFORMANCE OF THE COMPONENT OR THE AIRCRAFT? _____

c. ARE CONTROLS OF A VARIABLE NATURE, INDUCED BY A ROTORY MOTION, ACTUATED CLOCKWISE FROM THE "OFF" POSITION THROUGH "LOW" OR "DIM" TO "HIGH" OR "BRIGHT"? _____

d. ARE ALL CONTROLS WITHIN NORMAL REACH OF THE CREWMAN WHEN SEATED WITH SEAT BELT FASTENED? _____

e. DOES LOCATION, ARRANGEMENT, AND CLEARANCE OF ALL CONTROLS PRECLUDE INADVERTENT SELECTION AND OPERATION? _____

f. ARE CONTROLS AND SWITCHES SPACED TO PERMIT EASY AND ACCURATE OPERATION WITH HEAVILY GLOVED HANDS? _____

g. ARE ADEQUATE INSTRUCTIONS AND NAMEPLATES PROVIDED ON OR ADJACENT TO ALL CONTROLS REQUIRING THEM? _____

h. ARE ALL INSTRUCTIONS AND NAMEPLATES LEGIBLE AND READILY VISIBLE TO THE CREWMAN IN DAYLIGHT? _____ _____

i. CAN ANY CONTROLS BE COMBINED? _____

j. CAN ANY CONTROLS BE MADE AUTOMATIC? _____

k. SKETCH CONSOLE LAYOUTS AND IDENTIFY ALL CONTROLS, ETC. BY NAME.

l. REMARKS. -

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the currentversion before use.

K. STATION (Cont)

3. INSTRUMENTS

a. WHERE ARE INSTRUMENTS LOCATED? _____

b. ARE ALL INSTRUMENTS AND MARKINGS THEREON VISIBLE AND READABLE FROM THE NORMALLY OCCUPIED POSITION? _____

c. SKETCH INSTRUMENT PANEL AND IDENTIFY INSTRUMENTS BY NAME AND STOCK NUMBERS.

d. REMARKS. -

4. MISCELLANEOUS

a. ARE SUFFICIENT RECEPTACLES PROVIDED? _____

b. ARE LOCATIONS OF RECEPTACLES SATISFACTORY? _____

c. ARE INTERPHONE PROVISIONS ADEQUATE? _____

d. REMARKS. -

5. IS GENERAL ARRANGEMENT, LOCATION, ETC. OF THE STATION CONSIDERED ADEQUATE?

_____

Checked by: _____

Date: _____

☆ U. S. GOVERNMENT PRINTING OFFICE: 1969-393-090/5-445

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE NAVY
NAVAL AIR SYSTEMS COMMAND
WASHINGTON, D.C. 20360

APPENDIX 3 (PART I AIRPLANE)

PROPULSION SYSTEM - AIRPLANE MOCKUP INSPECTION CHECKOFF LIST

MODEL _____ AIRPLANE

CONTRACT NO. _____FY____

This PROPULSION SYSTEM checkoff list for airplanes consist of the following sections (cross out those sections listed below that are not applicable and omit from list):

PART I (AIRPLANES)

A. ENGINE SECTION OR NACELLE GROUP (PAGES A-1 TO A-6)

B. EXHAUST SYSTEM (RECIP. ENG.) (PAGE B-1)

C. EXHAUST SYSTEM (TURBO ENG.) (PAGES C-1 TO C-2)

D. PROPULSION SYSTEM CONTROLS (PAGES D-1 TO D-2)

E. PROPELLER AND ACCESSORIES (PAGE E-1)

F. STARTING SYSTEM (PAGES F-1 TO F-2)

G. COOLING SYSTEM (PAGES G-1 TO G-2)

H. INDUCTION SYSTEM (RECIP. ENG.) (PAGES H-1 TO H-2)

I. INDUCTION SYSTEM (TURBO ENG.) (PAGE I-1)

J. LUBRICATING SYSTEM (PAGES J-1 TO J-3)

K. FUEL SYSTEM (PAGES K-1 TO K-7)

L. AUXILIARY POWER PLANT (PAGE L-1)

M. ROCKET ENGINES (PAGES M-1 TO M-3)

N. ELECTRIC POWER SYSTEM (PAGES N-1 TO N-2)

FSC 6910

Prepared by: _____

Date: _____

NOTE: 1. The abbreviation "N.A." used herein denotes "Not Applicable".
NOTE: 2. For Helicopters See Part II of Appendix 3

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

PART I AIRPLANE

A. ENGINE SECTION OR NACELLE GROUP

NOTE: Repeat This Section For Each Engine

1. ENGINES

(a) CAN THE ENGINE BE READILY REMOVED AS A UNIT INCLUDING ENGINE MOUNT, ENGINE ACCESSORIES, ETC.? _____ IF NOT, WHY? _____

_____

(b) DOES THE AIRCRAFT REMAIN IN STATIC BALANCE ON THE LANDING GEAR WITH ENGINE UNITS REMOVED? _____

(1) IF NOT, WHAT MEANS ARE PROVIDED FOR MAINTAINING THE AIRCRAFT IN NORMAL GROUND POSITION? _____

_____

(c) ARE HOISTING PROVISIONS ADEQUATE FOR ENGINE UNITS? _____

IF NOT, WHY? _____

_____

(d) ARE SPECIAL ADAPTERS OR SPECIAL EQUIPMENTS AND/OR HOISTS REQUIRED? _____

IF YES, DESCRIBE? _____

_____

_____

(e) DO ENGINE MOUNT BULKHEAD FITTINGS PERMIT EASY AND RAPID ALIGNMENT AND ATTACHMENT OF ENGINE UNITS TO THE AIRCRAFT STRUCTURE? _____

IF NO, TELL WHY? _____

_____

_____

(f) HOW MANY CONNECTIONS BETWEEN ENGINE AND AIRFRAME? _____

LIST THEM: _____

_____

_____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

A. ENGINE SECTION OR NACELLE GROUP (Cont)

(g) IS FIREWALL PROVIDED? _____ DESCRIBE? _____

_____

(h) FOR MULTI-ENGINE AIRCRAFT, HAS A NEUTRAL ENGINE INSTALLATION BEEN ACHIEVED? __

_____

_____

(1) IF NOT, WHAT IS EXTENT OF DIFFERENCES? _____

_____

_____

2. BREATHERS AND DRAINS

(a) DO DRAINS, BREATHERS, ETC. DISCHARGE FREE OF EXHAUST OUTLETS, CAMERA WINDOWS AND WINDSHIELDS? _____ IF NOT, DESCRIBE? _____

_____

(b) WHAT DRAINS ARE COMBINED INTO A COMMON LINE? _____

_____ DESCRIBE? _____

_____

_____

(1) ARE COMBINATIONS SATISFACTORY? _____ IF NOT, DESCRIBE PROBLEMS? ___

_____

3. COWLING

(a) IS ALL ENGINE COWLING EASILY REMOVABLE FROM THE GROUND? _____ IF NOT, DESCRIBE? _____

(b) IS ALL ENGINE COWLING EASILY REMOVABLE USING WORK PLATFORMS? _____

IF NOT, DESCRIBE? _____

(c) WHAT IS SIZE OF PLATFORM? _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

A. ENGINE SECTION OR NACELLE GROUP (Cont)

(d) ARE REMOVABLE OR HINGED COWL SECTIONS OF CONVENIENT SIZE AND WEIGHT FOR HANDLING? _____

_____

(e) WHAT PROVISION IS MADE TO PREVENT LOSS OR DAMAGE TO REMOVED COWL SECTIONS OF CARRIER AIRCRAFT? _____

_____

(f) WHAT PROVISION IS MADE IN COWLING TO PREVENT ACCUMULATION OF OIL, WATER, ETC.?

_____

_____

(g) HOW IS ENGINE COWLING REMOVED? _____

_____

(h) IS ANY COWLING USED AS A WORK PLATFORM? _____

_____

(i) ARE OTHER PLATFORMS NECESSARY? _____

4. ACCESS

(a) HAS SATISFACTORY ACCESS BEEN PROVIDED FOR SERVICING, ADJUSTMENT (WHERE APPLICABLE) AND RAPID REMOVAL AND REPLACEMENT OF THE FOLLOWING? _____

	Access	Service or Adjustment Time	Removal Time
(1) MAGNETO			
(2) DISTRIBUTOR			
(3) CARBURETOR			
(4) CARBURETOR AIR CLEANER			
(5) VACUUM PUMP			
(6) INTER COOLER			
(7) SPARK PLUGS			
(8) TURBO SUPERCHARGER			

Source: https://assist.dla.mil -- Downloaded: 20261O-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

A. ENGINE SECTION OR NACELLE GROUP (Cont)

4. (Cont)

	Access	Service or Adjustment Time	Removal Time
(9) CABIN SUPERCHARGER			
(10) ADI SYSTEM			
(11) OIL DILUTION SOLENOID			
(12) STARTER			
(13) STARTER CONTROLS			
(14) IGNITION ALTERNATOR			
(15) ALTERNATOR/GENERATOR			
(16) CSD/VSCF			
(17) CSD/VSCF FILLER			
(18) CSD/VSCF FILTER			
(19) CSD/VSCF SIGHT GAGE			
(20) HYDRAULIC PUMP(S)			
(21) MAIN FUEL FILTER			
(22) OTHER FILTERS			
(23) FUEL PUMP (ENGINE SUPPLIED)			
(24) FUEL PUMP (AIRFRAME SUPPLIED)			
(25) FUEL FLOW METER			
(26) FUEL FLOW DIVIDER			
(27) FUEL FLOW DIVIDER FILTER			
(28) FUEL/OIL COOLER			
(29) AIR/OIL COOLER			
(30) FUEL CONTROL			
(31) FUEL CONTROL FILTER			
(32) A/B FUEL CONTROL			

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

A. ENGINE SECTION OR NACELLE GROUP (Cont)

4. (Cont)

	Access	Service or Adjustment Time	Removal Time
(33) A/B FUEL CONTROL FILTER			
(34) AIR BLEED VALVES			
(35) VARIABLE GEOMETRY ADJUSTMENT			
(36) EXHAUST NOZZLE ADJUSTMENT (IF ANY)			
(37) POWER MANAGEMENT CONTROL			
(38) MAIN FUEL SHUT OFF VALVE			
(39) N1 SPEED SWITCH			
(40) THROTTLE DISCONNECTS			
(41) OIL PUMP			
(42) COMB. CHAMBER DRAIN VALVE			
(43) COMB. CHAMBERS			
(44) THERMOCOUPLES			
(45) OIL TANK			
(46) OIL TANK FILLER			
(47) OIL TANK DIP STICK			
(48) OIL PRESSURE RELIEF			
(49) OIL PRESSURE TRANSMITTER			
(50) OIL FILTER			
(51) OIL LEVEL INDICATOR (VISUAL BULLS EYE)			
(52) FUEL MANIFOLD DUMP VALVE			
(53) OIL DRAIN PLUG			
(54) INLET AIR FILTERS/SEPARATOR			
(55) BEARING AIR FILTER			

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

A. ENGINE SECTION OR NACELLE GROUP (Cont)

4. (Cont)

	Access	Service or Adjustment Time	Removal Time
(56) FUEL DRAINS			
(57) ENGINE QUICK DISCONNECT FITTINGS			
(58) IGNITERS			
(59) IGNITION ALTERNATOR			
(60) N1 SPEED SWITCH			
(61) N2 SPEED SWITCH			

(b) ARE ALL ITEMS INSTALLED WHICH AFFECT ACCESSIBILITY OF VARIOUS PARTS OF THE PROPULSION SYSTEM INSTALLATION? _____ IF NOT, EXPLAIN? _____

_____

(c) CAN THE FOLLOWING ITEMS BE REMOVED SEPARATELY?

ENGINE _____ TIME FOR REMOVAL _____

ENGINE MOUNTS	WHERE LOCATED	TYPE
1. FORWARD		
2. AFT		

5. REMARKS

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 20261O-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

B. EXHAUST SYSTEM (RECIP ENG)

1. EXHAUST OUTLETS

(a) ARE EXHAUST OUTLETS CONSIDERED SATISFACTORY IN REGARD TO THE FOLLOWING?

(1) CONTAMINATION OF CREW SPACES? _____

_____

(2) PILOTS NIGHT VISION? _____

(3) WILL GLARE SHIELDS BE REQUIRED? _____

(4) WILL EXHAUST IMPINGE ON THE AIRCRAFT? _____ IF SO, WITHIN 4 FEET OF EXHAUST OPENING? _____

_____

(5) PROVISION FOR DRAINAGE OR LEAKAGE TO BE CONDUCTED OUTSIDE OF AIRCRAFT STRUCTURE? _____

(6) IS THERMAL EXPANSION ADEQUATELY PROVIDED FOR? _____

_____

(7) IS EXHAUST SYSTEM EASILY REMOVABLE? _____

_____

(8) IS OPEN END OF EXHAUST A MINIMUM OF 5 INCHES FROM INFLAMMABLE PORTIONS OF AIRCRAFT? _____

(9) INFRARED PROTECTION? _____

2. FLAME DAMPING

(a) WHAT TYPE OF FLAME DAMPING IS REQUIRED? _____

_____

(b) ARE FLAME DAMPING PROVISIONS READILY DETACHABLE? _____

_____

3. REMARKS

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

C. EXHAUST SYSTEM (TURBO ENGINES)

1. TAILPIPE

(a) WHAT IS TAILPIPE LENGTH? _____
DIAMETER? _____ MATERIAL? _____

(b) HOW IS TAILPIPE ATTACHED TO ENGINE? _____

_____

(c) HOW IS TAILPIPE SUPPORTED IN AIRCRAFT? _____

_____

(d) HOW IS TAILPIPE REMOVED? _____

_____

2. INSULATION

(a) WHAT TYPE EXHAUST SYSTEM INSULATION IS PROVIDED? _____

_____

(b) HOW MUCH OF EXHAUST SYSTEM IS COVERED BY INSULATION? _____

_____

3. EXHAUST OUTLETS

(a) HOW ARE EXHAUST OUTLETS CONSIDERED IN REGARD TO THE FOLLOWING?

(1) CONTAMINATION OF CREW SPACES? _____

_____

(2) POSSIBILITY OF OVERHEATING OR CORROSION DUE TO DISCHARGE ON PARTS OF AIRCRAFT? _____

(3) THERMAL EXPANSION IN THE AIRCRAFT? _____

_____

(4) EXHAUST IMPINGEMENT ON THE AIRCRAFT? _____

_____

(5) PROVISIONS FOR DRAINAGE OR LEAKAGE TO BE CONDUCTED OUTSIDE OF AIRCRAFT STRUCTURE? _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

C. EXHAUST SYSTEM (TURBO ENGINES) (Cont)

4. EXHAUST NOZZLE

(a) DOES EXHAUST NOZZLE PROVIDE FOR THE FOLLOWING?

	A/B EJECTOR	PRIMARY
(1) FIXED AREA, NO ADJUSTMENT		
(2) VARIABLE AREA, GROUND ADJUSTMENT		
(3) VARIABLE AREA, FLIGHT ADJUSTMENT		
(4) THRUST VARIATION		
(5) THRUST REVERSAL		
(6) INFRA-RED PROTECTION		

5. AREA CONTROL

(a) DESCRIBE METHOD OF AREA CONTROL IN REGARD TO THE FOLLOWING:

	A/B EJECTOR	PRIMARY
(1) MECHANICAL OR AERODYNAMIC MEANS OF CHANGING AREA.		
(2) ACTUATOR: HYDRAULIC, MECHANICAL, ELECTRICAL, ETC.		
(3) INFINITELY VARIABLE.		

6. REMARKS

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

D. PROPULSION SYSTEM CONTROLS

1. GENERAL

(a) WHAT PROVISION IS MADE FOR FINE ADJUSTMENT OF CONTROLS REQUIRING THIS FEATURE?

(b) WHAT PROVISION IS MADE FOR ADJUSTING THE FRICTION OF THE PRIMARY ENGINE CONTROLS?

2. CONTROL LEADS

(a) WHAT TYPE CONTROL LEADS ARE PROVIDED?

(b) WHAT PROVISION IS MADE IN CONTROL LEADS TO WITHSTAND VIBRATION AND ENGINE MOVEMENT WITHOUT CHANGE IN SETTING?

(c) ARE CONTROL LEADS FREE FROM INTERFERENCE WITH EACH OTHER AND WITH OTHER PARTS OF THE AIRCRAFT UNDER CONDITIONS OF VIBRATION AND DEFLECTION? _____ IF NOT, DESCRIBE PROBLEM?

(d) ARE CONTROL LEADS, ESPECIALLY CABLE TYPE, ARRANGED FOR EASE OF INSPECTION AND REPAIR? _____ IF NOT, WHY?

3. WHAT MEANS ARE PROVIDED IN THE COCKPIT FOR CONTROL OF COOLING AIRFLOW?

4. WHAT MEANS ARE PROVIDED IN THE COCKPIT FOR CONTROL OF COOLING AIR THROUGH THE OIL COOLER?

Source: https://assist.dla.mil -- Downloaded: 20260-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

D. PROPULSION SYSTEM CONTROLS (Cont)

5. LIST COCKPIT ELECTRICAL SWITCHES AND MECHANICAL PUSH-PULLS, ETC. REQUIRED FOR ENGINE OPERATION? _____

_____

_____

_____

_____

_____

_____

_____

_____

_____

_____

6. REMARKS

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

E. PROPELLER AND ACCESSORIES

1. PROPELLER

(a) WHAT IS PROPELLER CLEARANCE FOR THE FOLLOWING?

OVER GROUND	RADIAL CLEARANCE	FROM STRUCTURAL PARTS	OVER WATER	OVER HULL

(b) IS LOCATION OF PROPELLER PLANE SATISFACTORY WITH RESPECT TO LOCATION OF CREW MEMBER'S STATIONS? _____

(c) IN AUTOMATIC PROPELLERS OF THE HYDRAULIC TYPE, WHAT SPECIAL PROVISIONS ARE REQUIRED AND MADE TO PREVENT REDUCTION IN OIL PRESSURE DURING MANEUVERS? _____

_____

(d) WHAT KIND OF EXTENSION SHAFTING OR GEARING IS EMPLOYED? _____

2. ACCESSORIES

(a) WHAT TYPE PROPELLER SPINNER IS USED? _____

(b) ARE PROPELLER CUFFS USED? _____

(c) IN MULTIENGINE AIRCRAFT, WHAT TYPE SYNCHRONIZER IS USED? _____

3. DEICING

(a) WHAT PROVISION IS MADE FOR DEICING THE PROPELLER? _____

(b) IF FLUID SYSTEM IS USED, WHAT IS TANK CAPACITY? _____

(1) WHAT IS PUMP CAPACITY? _____

4. REMARKS

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

F. STARTING SYSTEM

1. WHAT TYPE STARTER IS USED? _____

(a) WHAT MANUFACTURER? _____

2. ARE BOOSTER DEVICES PROPERLY MOUNTED? _____

3. WHAT TYPE PRIMING SYSTEM IS USED? _____

(a) IS IT FURNISHED WITH THE ENGINE? _____

(b) DOES ARRANGEMENT OF PRIMER AND STARTER SWITCHES PERMIT SIMULTANEOUS OPERATION WITH ONE HAND? _____ IF NOT, DESCRIBE WHAT IS REQUIRED ? _____

_____

4. WHAT MEANS ARE PROVIDED FOR SUPPLYING HEAT FOR STARTING THE ENGINE? _____

_____

5. AIR TURBINE STARTERS

(a) DOES THE PNEUMATIC NIPPLE CONNECTION AT THE SKIN OF THE AIRPLANE CONFORM TO THE STANDARD NAVY-AIR FORCE REQUIREMENTS TYPE? _____

(b) IS THE PNEUMATIC NIPPLE CONNECTION LOCATED IN SUCH A MANNER TO PROVIDE EASY ACCESS BY GROUND CREWS? _____

(c) IS THE AIR DUCTING FROM THE PNEUMATIC NIPPLE CONNECTION TO THE STARTER INSTALLED WITH A MINIMUM LENGTH, AND A MINIMUM NUMBER OF BENDS IN ORDER TO AVOID EXCESSIVE PRESSURE DROPS THROUGHOUT THE SYSTEM? _____
DESCRIBE? _____

_____

(d) IS THE STARTER AIR INLET DUCTING INSTALLED IN SUCH A MANNER SO AS TO NOT EXERT EXCESSIVE LOADS AND MOMENTS ON THE STARTER INLET SCROLL WHEN THE STARTER SYSTEM IS ENERGIZED? _____ DESCRIBE? _____

_____

(e) IS THE REQUIRED ELECTRICAL CONNECTION FOR THE STARTING SYSTEM PROVIDED IN THE SAME AREA AS THE PNEUMATIC NIPPLE CONNECTION? _____
IF NOT, WHERE IS IT? _____

_____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

F. STARTING SYSTEM (Cont)

(f) IS A SATISFACTORY START SWITCH PROVIDED IN THE COCKPIT FOR COMPLETE CONTROL OF THE STARTING CYCLE BY THE PILOT? _____
DOES THE CIRCUIT PROVIDE FOR AUTOMATIC SHUTOFF OF THE AIR SUPPLY WHEN THE STARTER CENTRIFUGAL SWITCH IS ACTUATED? _____
CAN THE PILOT ABORT THE START AT HIS OPTION, DURING ANY PART OF THE START CYCLE?

_____

6. HYDRAULIC STARTERS

(a) ARE THE PRESSURE AND RETURN LINES CLEARLY MARKED OR SIZE CODED TO PREVENT IMPROPER CONNECTING? _____

(b) ARE THE HYDRAULIC CONNECTIONS LOCATED IN SUCH A MANNER TO PROVIDE EASY ACCESS BY GROUND CREWS? _____

(c) ARE DRAINS PROVIDED? _____

(d) ARE OVERBOARD DRAINS PROVIDED? _____

7. IS SPACE PROVIDED FOR A GTS? _____
WHAT ARE THE FEATURES OF THIS INSTALLATION? _____

_____

_____

_____

8. REMARKS

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

G. COOLING SYSTEM

1. AIR DUCTS

(a) WILL DUCTS AND CONNECTION PERMIT EASE OF INSPECTION, REPLACEMENT AND REPAIR? _____ DESCRIBE? _____

_____

(b) WHAT MEANS ARE PROVIDED IN AIR DUCTS TO PREVENT ACCUMULATION OF WATER, ETC? _____

_____

_____

(c) LIST THE FOLLOWING INFORMATION FOR ENGINE COOLING AIR DUCTS?

ITEM COOLED	SIZE	SHAPE	QUANTITY	LOCATION

(d) ARE COOLING AIR INLET DUCTS REQUIRED AND PROVIDED FOR OIL COOLERS? _____

(1) ARE COOLING AIR EXIT DUCTS REQUIRED AND PROVIDED FOR OIL COOLERS? _____

_____

(2) IF EXIT DUCTS ARE NOT PROVIDED, WHAT PROVISION IS MADE FOR EXHAUSTING THE COOLING AIR? _____

_____

(e) ARE COOLING AIR INLET DUCTS REQUIRED AND PROVIDED FOR INTERCOOLERS? _____

(1) ARE COOLING AIR EXIT DUCTS REQUIRED AND PROVIDED FOR INTERCOOLERS? _____

(2) IF EXIT DUCTS ARE NOT PROVIDED, WHAT PROVISION IS MADE FOR EXHAUSTING THE COOLING AIR? _____

2. WHAT MEANS ARE PROVIDED TO INSURE ADEQUATE COOLING OF ELECTRICAL GENERATORS, MAGNETOES, SPARK PLUG ELBOWS, ETC? _____ _____

_____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

G. COOLING SYSTEM (Cont)

3. WHAT MEANS ARE PROVIDED TO COOL THE EXHAUST SYSTEM? _____

_____

_____

_____

4. REMARKS

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

H. INDUCTION SYSTEM (RECIP. ENG.)

1. GENERAL

(a) ATTACH PAGES OF DESCRIPTIVE MATERIAL AND SCHEMATIC FROM MOCKUP BROCHURE, NOTING CHANGES?

(b) WHAT MEANS ARE PROVIDED TO PERMIT INDUCTION SYSTEM OPERATION UNDER ICING CONDITIONS? _____

(c) IS SOURCE OF ALTERNATE AIR ADEQUATELY PROTECTED FROM ENTRANCE OF RAIN, SNOW, ETC.? _____

(d) WHAT PROVISION IS MADE IN PREHEATER INSTALLATIONS FOR DISSIPATING HEAT WITH CONTROL IN FULL COLD POSITION? _____

2. INTAKE DUCTS

(a) LIST FOLLOWING INFORMATION FOR INTAKE DUCT ENTRANCES?

SIZE	SHAPE	QUANTITY	LOCATION

(b) WILL INTAKE DUCTS AND CONNECTIONS PERMIT EASE OF INSPECTION, REPLACEMENT, AND REPAIR? _____

3. INDUCTION AIR FILTERS

(a) IS AN INDUCTION AIR FILTER REQUIRED AND PROVIDED? _____

(b) WHAT IS ITS CAPACITY? _____

(c) WHERE IS IT LOCATED? _____

(d) ARE PROVISIONS (LESS FILTER ELEMENTS) INTEGRAL WITH THE AIRCRAFT? _____

(1) IF NOT, DOES THE COMPLETE ALTERNATE INSTALLATION PERMIT EASY AND RAPID INCORPORATION? _____

(e) WILL ALL INDUCTION AIR POSITIVELY PASS THROUGH THE FILTER DURING GROUND AND TAKE-OFF OPERATION? _____

(f) HOW CAN THE INDUCTION AIR FILTER BE BYPASSED TO AVOID LOSS OF RAM IN FLIGHT?

_____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

H. INDUCTION SYSTEM (RECIP. ENG.) (Cont)

4. INTERCOOLERS

(a) LIST THE FOLLOWING INFORMATION FOR INTERCOOLERS?

TYPE	SIZE	QUANTITY	LOCATION

5. TURBOSUPERCHARGERS

(a) WHAT TYPE TURBOSUPERCHARGER IS PROVIDED? _____

(b) WHAT TYPE AUTOMATIC CONTROL IS PROVIDED? _____

(1) DOES CONTROL GOVERN ALL SUPERCHARGER STAGES? _____

(c) WHERE IS TURBOSUPERCHARGER LOCATED? _____

6. REMARKS

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

I. INDUCTION SYSTEM (TURBO ENG.)

1. GENERAL

(a) ATTACH PAGES OF DESCRIPTIVE MATERIAL AND SCHEMATIC FROM MOCKUP BROCHURE, NOTING CHANGES?

(b) WHAT MEANS ARE PROVIDED FOR ENGINE ICE PREVENTION? _____

_____

2. INTAKE DUCTS

(a) WHAT TYPE OF INLETS ARE PROVIDED (FUSELAGE NOSE, NACELLE NOSE, WING LEADING EDGE, SCOOP, OR SUBMERGED)? _____

(b) ARE COVERS PROVIDED TO PREVENT FOREIGN OBJECTS FROM ENTERING INDUCTION SYSTEM WHEN THE AIRCRAFT IS ON THE GROUND? _____

(c) IN MULTIENGINE AIRCRAFT, ARE MEANS FOR CLOSING INLET OF DUCTS FOR CRUISING CONDITION PROVIDED? _____

(d) WHAT MEANS ARE PROVIDED FOR VARYING INLET AREA? _____

_____

(e) ARE ENGINE INLET SCREENS PROVIDED? _____ ARE THEY RETRACTABLE? _____

(f) IS THERE AN ALTERNATE AIR SOURCE? _____

(g) ARE THERE ANY PROVISIONS FOR LESSENING FOREIGN OBJECT DAMAGE TO THE ENGINE? _____

_____

3. REMARKS

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

J. LUBRICATING SYSTEM

1. GENERAL

(a) WHAT PROVISION IS MADE FOR PREVENTING OIL SEEPAGE INTO THE ENGINE DURING SHUT-DOWN? _____

(b) IS AN OIL DILUTION SYSTEM PROVIDED? _____

(c) IS TURBO SUPERCHARGER EQUIPPED WITH A SEPARATE OIL SYSTEM? _____

(d) WHAT PROVISIONS ARE MADE FOR POSITIVE OIL SUPPLY TO ENGINES UNDER CONDITIONS OF NEGATIVE ACCELERATIONS/ZERO "G"? _____

_____

(e) WHAT MEANS ARE PROVIDED TO MAINTAIN OIL IN A FLUID STATE IF RESTARTS ARE REQUIRED UNDER CONDITIONS OF EXTREME COLD (HIGH ALTITUDE CRUISE, ETC.)? _____

_____

_____

(f) WHAT MEANS ARE PROVIDED FOR SUPPLYING HEAT TO THE OIL TANKS? _____

_____

(g) IS THE OIL SYSTEM COMPATIBLE FOR 1100 AND 1065 OIL (RECIP. ENGINES ONLY)? ___

_____ FOR MIL-L-7808 AND MIL-L-23699 (TURBINES ONLY)? _____

_____

(h) ARE EMERGENCY SHUT OFF VALVES PROVIDED? _____

(i) HOW ARE SHUTOFF VALVES INTERCONNECTED WITH OTHER SYSTEM SHUTOFFS? _____

_____

(j) IS PRESSURE OILING PROVIDED? _____

(k) WHAT COUPLINGS ARE USED? _____

(l) IS OIL LEVEL OR QUANTITY INDICATION PROVIDED? _____ DESCRIBE? _____

_____

2. OIL TANKS

(a) WHERE ARE OIL TANKS LOCATED? _____

(1) IS LOCATION SATISFACTORY WITH REGARD TO OIL PUMP INLET? _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

J. LUBRICATING SYSTEM (Cont)

2. (Cont)

(b) WHAT TYPE FILLER UNITS ARE PROVIDED FOR THE TANKS? _____

(1) ARE PROVISIONS MADE TO INSURE FILLER UNIT CAPS ARE IN PLACE AND SECURE? ____

_____

(2) ARE SCUPPERS AND DRAINS PROVIDED? _____

(c) IS OIL TANK SUMP DRAINABLE AND CLEANABLE? _____

(d) IS OIL TANK DESIGNED FOR QUICK WARMUP? _____

(e) ARE OIL LINE CONNECTIONS ON THE TANK LOCATED PROPERLY? _____

(f) HOW ARE OIL TANKS VENTED? _____

(g) HOW IS SERVICE OIL TANK CAPACITY INDICATED ON THE GROUND? _____

(1) HOW INDICATED IN FLIGHT (ESPECIALLY IMPORTANT IN OIL SYSTEM EMPLOYING TRANSFER SYSTEMS)? _____

_____

(h) IS AN AUXILIARY OIL TANK PROVIDED? _____

(1) WHAT MEANS ARE PROVIDED FOR MAINTAINING AUXILIARY OIL IN A FLUID STATE OF TRANSFER? _____

(i) WHAT PROVISION IS MADE FOR ACCESS TO EACH TANK? _____

3. OIL SYSTEM DRAINS

(a) WHERE ARE OIL SYSTEM DRAINS LOCATED? _____

_____

(b) WILL OIL DRAIN CLEAR OF AIRCRAFT STRUCTURE? _____

(c) IS MAIN DRAIN EQUIPPED FOR CONNECTION OF DRAIN HOSE? _____

4. OIL COOLERS

(a) LIST THE FOLLOWING INFORMATION FOR COOLERS?

TYPE	SIZE	QUANTITY	LOCATION

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

J. LUBRICATING SYSTEM (Cont)

(b) WHAT OIL TEMPERATURE CONTROL IS PROVIDED? _____

(c) IS CONTROL AUTO OR MANUAL, OR DOES IT COMBINE THESE TWO FEATURES? _____

_____ DESCRIBE? _____

_____

(d) IS OIL SYSTEM INTEGRAL WITH ENGINE? _____

5. MISCELLANEOUS

(a) ARE OIL LINES PROTECTED AND SUPPORTED TO PREVENT DAMAGE BY PERSONNEL DURING FLIGHT AND SERVICING OPERATIONS? _____

_____

(b) IS CLEARANCE BETWEEN OIL LINE AND HOT DUCTS AT LEAST FOUR INCHES? _____

IF NOT, WHAT PROTECTION TO LINES IS PROVIDED? _____

_____

(c) CAN ALL FITTINGS AND CONNECTIONS IN OIL LINES BE READILY INSPECTED? _____

_____

6. REMARKS

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

K. FUEL SYSTEM

1. GENERAL

(a) ARE PROVISIONS REQUIRED AND PROVIDED TO INSURE PROPER FUEL SYSTEM OPERATION AT HIGH ALTITUDE? _____ WHAT ARE THEY? _____

_____

(b) LIST THE FOLLOWING INFORMATION FOR THE FUEL FLOWMETERS?

TYPE	CAPACITY	QUANTITY	LOCATION

(c) WHAT MEANS ARE PROVIDED FOR SHUTTING OFF FUEL FROM THE ENGINE(S) IN CASE OF NACELLE FIRE? _____ WHERE LOCATED? _____

_____

(d) IN TURBO ENGINES, IS THE ENGINE COMPRESSOR AIR UTILIZED TO TRANSFER FUEL? ____

_____ IS THE AIR REGULATED? _____ ARE ZERO LEAK CHECK VALVES UTILIZED? _____

_____

(e) ARE PROVISIONS MADE FOR INFLIGHT REFUELING? _____

(1) IS THE PROBE PROPERLY LOCATED? _____ WHERE? _____

(2) IS THE PROBE RETRACTABLE? _____

(3) IS ANTI-ICING PROVIDED? _____

(f) IS FUEL DUMPING SYSTEM PROVIDED? _____ WHAT TYPE? _____
WHERE ARE DUMP CHUTES? _____

_____

(g) WHAT IS FUEL DUMPING RATE AND TIME TO DUMP? _____ WILL THE FUEL IMPINGE ON THE AIRCRAFT? _____ WHERE? _____

_____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

K. FUEL SYSTEM (Cont)

2. FUEL TANKS

(a) WHAT TYPE FILTER UNITS ARE PROVIDED FOR THE TANKS? _____
WHERE ARE THEY LOCATED? _____
ARE GROUNDING JACKS PROVIDED? _____

(1) ARE PROVISIONS MADE TO INSURE THE PRESSURE AND/OR GRAVITY FILLER UNIT CAPS ARE IN PLACE AND SECURE? _____

(2) ARE FILLER UNITS LOCATED TO PERMIT ALL TANKS TO BE COMPLETELY FILLED ON THE GROUND? _____

(3) ARE FILLER UNITS LOCATED SO NO FIRE HAZARD EXISTS FROM SPILLAGE DURING FUELING WITH THE ENGINE(S) RUNNING? _____

(4) ARE SCUPPERS AND DRAINS PROVIDED TO PREVENT FUEL SPILLED DURING FILLING OPERATIONS FROM DAMAGING SELF SEALING TANKS OR CAUSING A FIRE HAZARD? _____

_____

(5) ARE PRESSURE FUELING PRE-CHECKS PROVIDED? _____

(a) HOW MANY? _____

(b) WHERE? _____

(c) IS MASS LOADING PROVIDED? _____

(d) WHAT TYPE PRE-CHECKS (ELECTRIC, HYDRAULIC)? _____

(b) HOW ARE FUEL TANKS VENTED? _____

_____

(1) ARE MEANS PROVIDED TO PREVENT FUEL SPILLAGE AND SYPHONING THROUGH THE VENTS?

_____

(2) ARE VENTS SIZED FOR MAX FUELING VALVE FLOW? _____

(3) IS A VENT MONITOR GAGE PROVIDED ON THE GROUND FUELING PANEL? _____

(c) WILL TANKS PERMIT PROPER FUEL AVAILABILITY WITHIN REQUIRED FLIGHT ATTITUDES?

_____

(d) WHAT TYPE PRESSURE FUELING CONNECTIONS ARE PROVIDED? _____

(e) WHAT MEANS ARE PROVIDED FOR RAPID DEFUELING OF TOTAL FUEL? _____

_____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

K. FUEL SYSTEM (Cont)

(f) WHAT MEANS ARE PROVIDED FOR INDICATING THE QUANTITY OF FUEL IN EACH TANK IN FLIGHT? _____

(g) IS COUNTER-POINTER QUANTITY GAGE PROVIDED? _____

(h) DESCRIBE QUANTITY PRESENTATION IN COCKPIT? _____

_____

3. FUEL SYSTEM DRAINS

(a) HOW MANY DRAINS? _____

(b) WHERE ARE FUEL SYSTEM DRAINS LOCATED? _____

_____

(c) WHAT MEANS ARE PROVIDED FOR DRAINING FUEL LINE STRAINERS? _____

_____

(d) WHAT IS MICRON SIZE OF STRAINER? _____

(e) IS ANTI-ICING PROVIDED FOR THE STRAINER? _____ IS IMPENDING BY-PASS INDICATION PROVIDED IN THE COCKPIT? _____ WHERE? _____

_____

(f) WHERE IS FUEL LINE STRAINER LOCATED? _____

_____

(g) IN TURBO ENGINES PROVIDED WITH A MANIFOLD SUMP VALVE AND COMBUSTION CHAMBER DRAIN VALVE. IS THE FUEL COLLECTED? _____ IF SO, HOW IS IT DRAINED FROM THE COLLECTOR? _____

_____

(h) IS FUEL CONTROL DRAIN A SEPARATE OVERBOARD LINE? _____
ARE ANY DRAINS MANIFOLDED TOGETHER? _____ IF SO, WHICH ONE? _____

_____ IS THE MANIFOLD AT THE SKIN OR ELSEWHERE? _____

4. FUEL LINES

(a) ARE FUEL LINES ROUTED AS DIRECTLY AS PRACTICABLE? _____ IF NOT, DESCRIBE

_____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

K. FUEL SYSTEM (Cont)

(b) IS GRADIENT SUCH THAT LOCALIZED HIGH SUCTION POINTS ARE AVOIDED AND VAPOR LOCKING TENDENCIES MINIMIZED? _____ DEFINE PROBLEM AREAS? _____

_____

(c) ARE FUEL LINES SO LOCATED OR PROTECTED THAT DAMAGE DURING SERVICING OR OVERHAUL IS ELIMINATED? _____ DEFINE PROBLEM AREAS? _____

_____

(d) ARE MAIN FEED LINES SELF SEALING? _____ IF NOT, ARE THEY PROTECTED BY THE AIRCRAFT STRUCTURE? _____

5. TRANSFER FUEL PUMPS

(a) WHAT TYPE AND HOW MANY FUEL PUMPS ARE PROVIDED? _____

_____

(b) WHERE ARE THEY LOCATED? _____

_____

(c) IS LOCATION SUCH THAT PUMPS WILL DRAW FUEL FROM ALL TANKS AND WITH MINIMUM INLET SUCTION AT THE PUMP? _____

_____

6. FIXED FUEL TANKS

(a) ARE INTEGRAL TANKS USED? _____ HOW MANY ARE THERE? _____
WHERE LOCATED? _____

(b) ARE BLADDER CELLS EMPLOYED? _____ HOW MANY ARE THERE? _____
WHERE LOCATED? _____
HOW MANY SELF-SEALING? _____ WHERE LOCATED? _____

_____

(c) WHAT PROVISION IS MADE FOR ACCESS TO EACH TANK? _____

(d) CAN EACH SELF SEALING OR FLEXIBLE TANK BE INSTALLED WITHOUT EXCESSIVE DEFORMATION? _____

_____

(e) DOES TANK SUPPORT CAVITY HAVE ADEQUATE DRAINAGE PROVISIONS? _____

_____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

K. FUEL SYSTEM (Cont)

6. (Cont)

(f) CAN EACH TANK BE INSTALLED WITHOUT INTERFERING WITH OTHER TANKS? _____

_____

(g) IS THERE AN INSPECTION DOOR ON TOP OF EACH SELF SEALING OR FLEXIBLE TANK? ____

_____

(h) CAN ENTIRE INTERIOR OF EACH TANK BE READILY INSPECTED THRU TANK INSPECTION DOORS WHEN TANKS ARE INSTALLED IN THE AIRCRAFT? _____

_____

(i) ARE AS MANY TANK FITTINGS AS PRACTICABLE MOUNTED ON INSPECTION DOORS OF SELF SEALING OR FLEXIBLE TANKS? _____

_____

(j) WHAT ACCESS IS PROVIDED TO INSPECT TANK FITTINGS? _____

_____

_____

7. ARE EXTERNAL AUXILIARY FUEL TANKS USED? _____ WHERE MOUNTED? _____

_____

8. MISCELLANEOUS

(a) ARE FUEL LINES PROTECTED AND SUPPORTED PROPERLY TO PREVENT DAMAGE BY PERSONNEL DURING FLIGHT AND SERVICING OPERATIONS? _____ IF NOT, DESCRIBE PROBLEM AREA? _____

_____

(b) CAN ALL FITTINGS AND CONNECTIONS IN FUEL LINES BE READILY INSPECTED FOR LEAKAGE? _____ IF NOT, GIVE DETAILS? _____

_____

(c) IS CLEARANCE BETWEEN FUEL LINES AND HOT DUCTS AT LEAST FOUR INCHES? _____

_____ IF NOT, HOW ARE LINES PROTECTED FROM HEAT? _____

_____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

K. FUEL SYSTEM (Cont)

9. AIR REFUELING SYSTEM

(a) INSTALLATION: CAN THE TANKER PACKAGE BE INSTALLED READILY? _____

_____

10. VALVES AND SWITCHES

(a) HOW MANY LEVEL CONTROLS ARE USED? _____ WHAT MAKE? _____

_____

(b) DO MOTOR OPERATED VALVES INCORPORATE STRAY ELECTRICAL VOLTAGE FIXES? _____

_____

(c) ARE PRESSURE SWITCHES MOUNTED SO THAT THEY ARE NOT LOW POINTS TO CATCH AND RETAIN MOISTURE? _____

(d) IS THE MAIN FUEL SHUT OFF VALVE MANUAL? _____
IF NOT, WHAT? _____

(e) ARE VALVES AND SWITCHES READILY ACCESSIBLE FOR MAINTENANCE? _____

_____

11. COCKPIT CONTROLS

(a) WHAT FUEL SYSTEM CONTROLS ARE IN THE COCKPIT? _____

_____

_____

(b) ARE LEVER LOCK SWITCHES USED? _____

WHERE? _____

_____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

K. FUEL SYSTEM (Cont)

12. REMARKS

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

L. AUXILIARY POWER PLANT

1. GENERAL

(a) ARE ADEQUATE STARTING PROVISIONS MADE AT THE POWER UNIT? _____ AT ENGINEER'S STATION? _____

(b) ARE OIL AND FUEL DRAINS PROVIDED? _____

(1) ARE OVERBOARD DRAINS PROVIDED? _____

(c) IS FUEL CUTOFF VALVE PROPERLY INSTALLED? _____

(d) LIST THE FOLLOWING INFORMATION FOR INLET AND OUTLET DUCTS?

	SIZE	LENGTH	LOCATION
INLET DUCT	_____	_____	_____
OUTLET DUCT	_____	_____	_____

(e) IS FIREPROOF ENCLOSURE PROVIDED? _____

2. POWER UNIT

(a) LIST THE FOLLOWING INFORMATION FOR AUXILIARY POWER UNIT INCLUDING AIR AND GAS TURBINE MOTORS?

TYPE	QUANTITY	LOCATION

(b) WHAT ACCESSORIES ARE DRIVEN BY THE AUXILIARY POWER UNIT (BY TYPE AND CAPACITY)?

_____

(c) WILL HOISTING PROVISIONS, HATCHES, ETC., PERMIT EASY AND RAPID INSTALLATION AND REMOVAL OF THE POWER UNIT? _____

(d) IS ACCESS PROVIDED TO PERMIT SERVICING OF ALL NECESSARY PARTS OF THE UNIT? ___

(e) CAN THE GENERATORS OR ALTERNATORS BE PARALLEL WITH THE ENGINE, THE ENGINE DRIVEN GENERATORS OR ALTERNATORS? _____

3. REMARKS

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

M. ROCKET ENGINES

1. GENERAL

(a) CAN THE ENGINE BE READILY REMOVED AS A UNIT INCLUDING ENGINE, ENGINE MOUNT, ENGINE ACCESSORIES, ETC? _____

(1) DOES THE AIRCRAFT REMAIN IN STATIC BALANCE ON THE LANDING GEAR WITH ENGINE UNITS REMOVED? _____ IF NOT, WHAT MEANS ARE PROVIDED FOR MAINTAINING THE AIRCRAFT IN NORMAL GROUND POSITION? _____

(b) WHAT PROVISION IS MADE IN COWLING TO PREVENT ACCUMULATION OF OIL, WATER, PROPELLANTS, ETC? _____

(1) ARE REMOVABLE COWL SECTIONS OF CONVENIENT SIZE FOR HANDLING? _____

(c) HAS SATISFACTORY ACCESS BEEN PROVIDED FOR OPERATION OF THE FOLLOWING?

PROPELLANT FILLER CAPS? _____

OIL FILLER CAPS ON TURBINE? _____

PROPELLANT LINE STRAINER? _____

PROPELLANT LINE STRAINER SCREEN? _____

DEFUELING DRAINS? _____

PROPELLANT TANKAGE MEASURING DEVICE? ___

PRESSURIZING GAS SYSTEM EQUIPMENT? _____

TURBINE HOUSING DRAIN? _____

(d) HAS SATISFACTORY ACCESS BEEN PROVIDED FOR SERVICING, ADJUSTMENT (WHERE APPLICABLE), AND RAPID REMOVAL AND REPLACEMENT OF THE FOLLOWING?

MAIN PROPELLANT VALVES? _____

PROPELLANT CHECK VALVES? _____

MAIN CONTROL BOX? _____

GAS GENERATOR-TURBINE-PUMP ASSEM.? ___

PRESSURIZING GAS SYSTEM FOR GAS GENERATOR PROPELLANT TANKS? _____

CONTROL SYSTEM FOR PROPELLANT FEED SYSTEM? _____

PROPELLANT LINE STRAINERS? _____

TURBINE OIL TANKS? _____

EXHAUST SYSTEM OR PROPELLANT PUMP TURBINE? _____

(e) ARE ALL ITEMS INSTALLED WHICH MAY AFFECT ACCESSIBILITY OF THE VARIOUS PARTS OF THE PROPULSION SYSTEM INSTALLATION? _____

(f) ARE HOISTING PROVISIONS SATISFACTORY FOR THE PROPULSION SYSTEM? _____

(g) DO THE ENGINE-MOUNT-BULKHEAD FITTINGS PERMIT EASY AND RAPID ALIGNMENT AND ATTACHMENT OF THE PROPULSION SYSTEM TO THE AIRCRAFT STRUCTURE? _____

(h) WHAT TYPE QUICK-DISCONNECT FITTINGS ARE PROVIDED FOR FLUID LINES WHICH REQUIRE DISCONNECTION FOR PROPULSION SYSTEM REMOVAL? _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

M. ROCKET ENGINES (Cont)

(i) IS PROPULSION SYSTEM SATISFACTORY AS TO LOCATION AND GENERAL PURPOSE? _____

(1) DOES ROCKET JET EXHAUST CLEAR ADJACENT AIRCRAFT STRUCTURE? _____

(j) DOES ENGINE MOUNT DESIGN APPEAR SATISFACTORY? _____

(k) WHAT TYPE VIBRATION ISOLATING DEVICES ARE PROVIDED? _____

(1) WHAT ARE THEY LOCATED BETWEEN? _____

(l) ARE ADEQUATE ENGINE AND ACCESSORY DRAINS PROVIDED? _____

(1) DO DRAINS, BREATHERS, ETC., DISCHARGE FREE OF EXHAUST OUTLETS, BOMBING WINDOWS AND WINDSHIELDS? _____

(m) WHAT DRAINS ARE COMBINED INTO A COMMON LINE? _____

(1) ARE COMBINATIONS SATISFACTORY? _____

2. PROPULSION SYSTEM CONTROLS

(a) WHAT TYPE CONTROL LEADS ARE PROVIDED? _____
IF FLEXIBLE PUSH-PULL LEADS, ARE THEY OF APPROVED TYPE? _____

(b) WHAT PROVISION IS MADE IN CONTROL LEADS TO WITHSTAND VIBRATION AND ENGINE MOVEMENT WITHOUT FAILURE OR CHANGE IN SETTING? _____

(c) ARE CONTROL LEADS FREE FROM INTERFERENCE WITH EACH OTHER AND WITH OTHER PARTS OF THE AIRCRAFT UNDER CONDITIONS OF VIBRATION AND DEFLECTION? _____

(d) ARE CONTROL LEADS, ESPECIALLY CABLE TYPE, ARRANGED FOR EASE OF INSPECTION AND REPAIR? _____

(e) ARE APPROVED TYPE QUICK DISCONNECT FITTINGS INSTALLED IN ALL PROPULSION SYSTEM CONTROLS AT THE PROPER POINTS? _____

(1) WHAT TYPE? _____

3. PROPELLANT SYSTEM

(a) PROPELLANT TANKAGE AND PIPING

(1) ARE PROPELLANT TANKS AND LINES INSTALLED SO THEY MAY BE READILY REMOVED? ___

_____

(2) WHAT SAFETY DEVICES ARE PROVIDED ON PROPELLANT TANKS? _____

_____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

M. ROCKET ENGINES (Cont)

3. (cont)

(3) ARE STOP VALVES INSTALLED WHERE NECESSARY? _____

(4) ARE STRAINERS INSTALLED WHERE NECESSARY? _____

(5) ARE PROPELLANT LINES AS DIRECT AS POSSIBLE? _____

(6) ARE SHORT BENDS OR LOOPS WHICH MAY SERVE AS GAS POCKETS AVOIDED? _____

(7) ARE PROPELLANT LINES PROPERLY SECURED? _____

(8) ARE EXPANSION JOINTS PROVIDED WHERE NECESSARY? _____

(b) PRESSURIZING GAS SYSTEM

(1) ARE GAS STOWAGE TANKS EASILY ACCESSIBLE AND READILY REMOVABLE? _____

(2) ARE STOP VALVES INSTALLED WHERE NECESSARY? _____

(3) IS PRESSURE REDUCING SYSTEM SATISFACTORILY INSTALLED? _____

(4) WHAT SAFETY DEVICES ARE PROVIDED? _____

_____

(c) PROPELLANT FEED SYSTEM

(1) IS GAS GENERATOR-TURBINE-PUMP ASSEMBLY MOUNTING SATISFACTORY? _____

(2) CAN THE ASSEMBLY BE EASILY REMOVED? _____

(3) WHAT PROVISION IS MADE TO PROPERLY INSULATE TURBINE HOUSING AND TURBINE EXCHANGES LINE TO PROTECT ADJACENT EQUIPMENT FROM DAMAGE DUE TO HEAT GENERATED IN TURBINE HOUSING AND EXHAUST LINE? _____

(4) IS TURBINE EXHAUST LINE EASILY REMOVED? _____

(5) IS DRAIN FOR TURBINE HOUSING PROVIDED? _____

(6) WHAT OVERSPEED CONTROLS ARE PROVIDED ON TURBINE? _____

_____

4. REMARKS

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the currentversion before use.

PART I (Cont)

N. ELECTRIC POWER SYSTEM

1. THE POWER SUPPLY, MAJOR ITEMS HAVE BEEN MOCKED UP AND CHECKED FOR, TYPE, MOUNTING, AND ADEQUACY AS FOLLOWS?

   (a) GENERATOR(S) _____

   _____

   (b) INVERTER(S) _____

   _____

   (c) CONVERTER(S) _____

   _____

   (d) BATTERY(IES) _____

   _____

   (e) CONTROL PANEL(S) _____

   _____

   (f) _____

2. ARE THE ABOVE ITEMS ACCESSIBLE FOR MAINTENANCE REPLACEMENT? _____

   _____

3. ARE THE ABOVE ITEMS PROVIDED ADEQUATE COOLING? _____

4. IS BATTERY QUICK DISCONNECTED AT GROUND LEVEL BY AVERAGE HEIGHT SERVICE PERSONNEL FOR AN EMERGENCY DISCONNECT? _____

5. WHAT TYPE BATTERY INTAKE AND EXHAUST VENTING USED? _____

   _____

6. IS GENERATOR INTAKE AND EXHAUST COOLING ADEQUATELY PROVIDED FOR? _____

   _____

7. WHAT MEANS IS PROVIDED FOR ADEQUATELY COOLING GENERATOR AND OTHER ELECTRIC POWER ACCESSORIES? _____

   _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

N. ELECTRIC POWER SYSTEM (Cont)

8. IS AREA SURROUNDING GENERATOR TERMINALS AND COOLING DUCTS SUFFICIENTLY OPEN TO PREVENT DAMAGE TO THE TERMINALS AND DUCTS DURING REMOVAL AND SERVICING OF GENERATOR OR NEARBY ACCESSORIES? _____

_____

LOCATION OF TERMINALS INTAKE AND EXHAUST DUCTS? _____

_____

9. GENERATOR MOUNTING HOLES USED ROUND, KEYHOLE SLOTS OR QUICK DISCONNECT? _____

_____

_____

10. ROUTING OF GENERATOR FEEDERS? _____

_____

11. ROUTING OF TUBING TO SUPPORT CSD'S AND LIQUID COOLED GENERATORS? _____

_____

_____

12. REMARKS

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE NAVY
NAVAL AIR SYSTEMS COMMAND
WASHINGTON, D.C. 20360

APPENDIX 3 (PART II HELICOPTER)

PROPULSION SYSTEM - HELICOPTER MOCKUP INSPECTION CHECKOFF LIST

MODEL _____ HELICOPTER

CONTRACT NO. _____ FY _____

This PROPULSION SYSTEM checkoff list for helicopters consists of the following sections (cross out those sections listed below that are not applicable and omit from list):

PART II (HELICOPTERS)

A. ENGINE SECTION OR NACELLE GROUP (PAGES A-1 TO A-6)

B. EXHAUST SYSTEM (RECIP. ENG.) (PAGE B-1)

C. EXHAUST SYSTEM (TURBO ENG.) (PAGES C-1 TO C-2)

D. PROPULSION SYSTEM CONTROLS (PAGES D-1 TO D-2)

E. STARTING SYSTEM (PAGES E-1 TO E-2)

F. COOLING SYSTEM (PAGES F-1 TO F-2)

G. INDUCTION SYSTEM (RECIP. ENG.) (PAGES G-1 TO G-2)

H. INDUCTION SYSTEM (TURBO ENG.) (PAGE H-1)

I. LUBRICATING SYSTEM (PAGES I-1 TO I-3)

J. FUEL SYSTEM (PAGES J-1 TO J-7)

K. AUXILIARY POWER PLANT (PAGE K-1)

L. ELECTRIC POWER SYSTEM (PAGES L-1 TO L-2)

M. TRANSMISSIONS (PAGES M-1 TO M-8)

FSC 6910

Prepared by: _____

Date: _____

NOTE: 1. The abbreviation "N.A." used herein denotes "Not Applicable".
NOTE: 2. For Airplanes See Part I of Appendix 3

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART II HELICOPTER

A. ENGINE SECTION OR NECELLE GROUP

NOTE: Repeat This Section For Each Engine

1. ENGINES

(a) CAN THE ENGINE BE READILY REMOVED AS A UNIT INCLUDING ENGINE MOUNT, ENGINE ACCESSORIES, ETC? _____ IF NOT, WHY? _____

_____

(b) DOES THE AIRCRAFT REMAIN IN STATIC BALANCE ON THE LANDING GEAR WITH ENGINE UNITS REMOVED? _____

(1) IF NOT, WHAT MEANS ARE PROVIDED FOR MAINTAINING THE AIRCRAFT IN NORMAL GROUND POSITION? _____

_____

(c) ARE HOISTING PROVISIONS ADEQUATE FOR ENGINE UNITS? _____

IF NOT, WHY? _____

_____

(d) ARE SPECIAL ADAPTERS OR SPECIAL EQUIPMENTS AND/OR HOISTS REQUIRED? _____

IF YES, DESCRIBE? _____

_____

_____

(e) DO ENGINE MOUNT BULKHEAD FITTINGS PERMIT EASY AND RAPID ALIGNMENT AND ATTACHMENT OF ENGINE UNITS TO THE AIRCRAFT STRUCTURE? _____

IF NO, TELL WHY? _____

_____

_____

(f) HOW MANY CONNECTIONS BETWEEN ENGINE AND AIRFRAME? _____

LIST THEM: _____

_____

_____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

A. ENGINE SECTION OR NACELLE GROUP (Cont)

(g) IS FIREWALL PROVIDED? _____ DESCRIBE? _____

_____

(h) FOR MULTI-ENGINE AIRCRAFT, HAS A NEUTRAL ENGINE INSTALLATION BEEN ACHIEVED? __

_____

_____

(1) IF NOT, WHAT IS EXTENT OF DIFFERENCES? _____

_____

_____

2. BREATHERS AND DRAINS

(a) DO DRAINS, BREATHERS, ETC. DISCHARGE FREE OF EXHAUST OUTLETS, CAMERA WINDOWS AND WINDSHIELDS? _____ IF NOT, DESCRIBE? _____

_____

(b) WHAT DRAINS ARE COMBINED INTO A COMMON LINE? _____

_____ DESCRIBE? _____

_____

_____

(1) ARE COMBINATIONS SATISFACTORY? _____ IF NOT, DESCRIBE PROBLEMS? ____

_____

3. COWLING

(a) IS ALL ENGINE COWLING EASILY REMOVABLE FROM THE GROUND? _____ IF NOT, DESCRIBE? _____

(b) IS ALL ENGINE COWLING EASILY REMOVABLE USING WORK PLATFORMS? _____

IF NOT, DESCRIBE? _____

(c) WHAT IS SIZE OF PLATFORM? _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

A. ENGINE SECTION OR NACELLE GROUP (Cont)

3. (Cont)

(d) ARE REMOVABLE OR HINGED COWL SECTIONS OF CONVENIENT SIZE AND WEIGHT FOR HANDLING? _____

_____

(e) WHAT PROVISION IS MADE TO PREVENT LOSS OR DAMAGE TO REMOVED COWL SECTIONS OF CARRIER AIRCRAFT? _____

_____

(f) WHAT PROVISION IS MADE IN COWLING TO PREVENT ACCUMULATION OF OIL, WATER, ETC.?

_____

_____

(g) HOW IS ENGINE COWLING REMOVED? _____

_____

(h) IS ANY COWLING USED AS A WORK PLATFORM? _____

_____

(i) ARE OTHER PLATFORMS NECESSARY? _____

4. ACCESS

(a) HAS SATISFACTORY ACCESS BEEN PROVIDED FOR SERVICING, ADJUSTMENT (WHERE APPLICABLE) AND RAPID REMOVAL AND REPLACEMENT OF THE FOLLOWING? _____

	Access	Service or Adjustment Time	Removal Time
(1) MAGNETO			
(2) DISTRIBUTOR			
(3) CARBURETOR			
(4) CARBURETOR AIR CLEANER			
(5) VACUUM PUMP			
(6) INTER COOLER			
(7) SPARK PLUGS			
(8) TURBO SUPERCHARGER			

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

A. ENGINE SECTION OR NACELLE GROUP (Cont)

4. (Cont)

	Access	Service or Adjustment Time	Removal Time
(9) CABIN SUPERCHARGER			
(10) ADI SYSTEM			
(11) OIL DILUTION SOLENOID			
(12) STARTER			
(13) STARTER CONTROLS			
(14) IGNITION ALTERNATOR			
(15) ALTERNATOR/GENERATOR			
(16) CSD/VSCF			
(17) CSD/VSCF FILLER			
(18) CSD/VSCF FILTER			
(19) CSD/VSCF SIGHT GAGE			
(20) HYDRAULIC PUMP(S)			
(21) MAIN FUEL FILTER			
(22) OTHER FILTERS			
(23) FUEL PUMP (ENGINE SUPPLIED)			
(24) FUEL PUMP (AIRFRAME SUPPLIED)			
(25) FUEL FLOW METER			
(26) FUEL FLOW DIVIDER			
(27) FUEL FLOW DIVIDER FILTER			
(28) FUEL/OIL COOLER			
(29) AIR/OIL COOLER			
(30) FUEL CONTROL			
(31) FUEL CONTROL FILTER			
(32) AIR BLEED VALVES			

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

A. ENGINE SECTION OR NACELLE GROUP (Cont)

4. (Cont)

	Access	Service or Adjustment Time	Removal Time
(33) EXHAUST NOZZLE ADJUSTMENT (IF ANY)			
(34) POWER MANAGEMENT CONTROL			
(35) MAIN FUEL SHUT OFF VALVE			
(36) N1 SPEED SWITCH			
(37) THROTTLE DISCONNECTS			
(38) OIL PUMP			
(39) COMB. CHAMBER DRAIN VALVE			
(40) COMB. CHAMBERS			
(41) THERMOCOUPLES			
(42) OIL TANK			
(43) OIL TANK FILLER			
(44) OIL TANK DIP STICK			
(45) OIL PRESSURE RELIEF			
(46) OIL PRESSURE TRANSMITTER			
(47) OIL FILTER			
(48) OIL LEVEL INDICATOR(VISUAL BULL'S EYE)			
(49) FUEL MANIFOLD DUMP VALVE			
(50) OIL DRAIN PLUG			
(51) INLET AIR FILTERS/SEPARATORS			
(52) BEARING AIR FILTER			
(53) FUEL DRAINS			
(54) ENGINE QUICK DISCONNECT FITTINGS			
(55) IGNITERS			
(56) IGNITION ALTERNATOR			
(57) N2 SPEED SWITCH			

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

A. ENGINE SECTION OR NACELLE GROUP (Cont)

4. (Cont)

(b) ARE ALL ITEMS INSTALLED WHICH AFFECT ACCESSIBILITY OF VARIOUS PARTS OF THE PROPULSION SYSTEM INSTALLATION? _____ IF NOT, EXPLAIN? _____

_____

(c) CAN THE FOLLOWING ITEMS BE REMOVED SEPARATELY?

ENGINE _____ TIME FOR REMOVAL _____

ENGINE MOUNTS	WHERE LOCATED	TYPE
1. FOWARD		
2. AFT		

ENGINE GEAR BOX _____ TIME FOR REMOVAL _____

GEAR BOX (MOUNTS)	WHERE LOCATED	TYPE
1. FORWARD		
2. AFT		

TRANSMISSION _____ TIME FOR REMOVAL _____

5. REMARKS

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

B. EXHAUST SYSTEM (RECIP ENG)

1. EXHAUST OUTLETS

(a) ARE EXHAUST OUTLETS CONSIDERED SATISFACTORY IN REGARD TO THE FOLLOWING?

(1) CONTAMINATION OF CREW SPACES? _____

_____

(2) PILOTS NIGHT VISION? _____

(3) WILL GLARE SHIELDS BE REQUIRED? _____

(4) WILL EXHAUST PIPINGS ON THE AIRCRAFT? _____ IF SO, WITHIN 4 FEET OF EXHAUST OPENING? _____

_____

(5) PROVISION FOR DRAININGS OR LEAKAGE TO BE CONDUCTED OUTSIDE OF AIRCRAFT STRUCTURE? _____

(6) IS THERMAL EXPANSION ADEQUATELY PROVIDED FOR? _____

_____

(7) IS EXHAUST SYSTEM EASILY REMOVABLE? _____

_____

(8) IS OPEN END OF EXHAUST A MINIMUM OF 6 INCHES FROM INFLAMMABLE PORTIONS OF AIRCRAFT? _____

(9) INFRARED PROTECTION? _____

2. FLAME MIPING

(a) WHAT TYPE OF FLAME MIPING IS REQUIRED? _____

_____

(b) ARE FLAME DAMPING PROVISIONS READILY DETACHABLE? _____

_____

3. REMARKS

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

C. EXHAUST SYSTEM (TURBO ENGINES)

1. TAILPIPE

(a) WHAT IS TAILPIPE LENGTH? _____
DIAMETER? _____ MATERIAL? _____

(b) HOW IS TAILPIPE ATTACHED TO ENGINE? _____

_____

(c) HOW IS TAILPIPE SUPPORTED IN AIRCRAFT? _____

_____

(d) HOW IS TAILPIPE REMOVED? _____

_____

2. INSULATION

(a) WHAT TYPE EXHAUST SYSTEM INSULATION IS PROVIDED? _____

_____

(b) HOW MUCH OF EXHAUST SYSTEM IS COVERED BY INSULATION? _____

_____

3. EXHAUST OUTLETS

(a) HOW ARE EXHAUST OUTLETS CONSIDERED IN REGARD TO THE FOLLOWING?

(1) CONTAMINATION OF CREW SPACES? _____

_____

(2) POSSIBILITY OF OVERHEATING OR CORROSION DUE TO DISCHARGE ON PARTS OF AIRCRAFT? _____

(3) THERMAL EXPANSION IN THE AIRCRAFT? _____

_____

(4) EXHAUST IMPINGEMENT ON THE AIRCRAFT? _____

_____

(5) PROVISIONS FOR DRAINAGE OR LEAKAGE TO BE CONDUCTED OUTSIDE OF AIRCRAFT STRUCTURE? _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

C. EXHAUST SYSTEM (TURBO ENGINES) (Cont)

4. EXHAUST NOZZLE

(a) DOES EXHAUST NOZZLE PROVIDE FOR THE FOLLOWING?

(1) FIXED AREA, NO ADJUSTMENT _____

(2) VARIABLE AREA, GROUND ADJUSTMENT _____

(3) VARIABLE AREA, FLIGHT ADJUSTMENT _____

(4) THRUST VARIATION _____

(5) INFRA-RED PROTECTION _____

5. AREA CONTROL

(a) DESCRIBE METHOD OF AREA CONTROL IN REGARD TO THE FOLLOWING:

(1) MECHANICAL OR AERODYNAMIC MEANS OF CHANGING AREA. _____

(2) ACTUATOR: HYDRAULIC, MECHANICAL, ELECTRICAL, ETC. _____

(3) INFINITELY VARIABLE. _____

6. REMARKS

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

D. PROPULSION SYSTEM CONTROLS

1. GENERAL

(a) WHAT PROVISION IS MADE FOR FINE ADJUSTMENT OF CONTROLS REQUIRING THIS FEATURE?

(b) WHAT PROVISION IS MADE FOR ADJUSTING THE FRICTION OF THE PRIMARY ENGINE CONTROLS?

2. CONTROL LEADS

(a) WHAT TYPE CONTROL LEADS ARE PROVIDED?

(b) WHAT PROVISION IS MADE IN CONTROL LEADS TO WITHSTAND VIBRATION AND ENGINE MOVEMENT WITHOUT CHANGE IN SETTING?

(c) ARE CONTROL LEADS FREE FROM INTERFERENCE WITH EACH OTHER AND WITH OTHER PARTS OF THE AIRCRAFT UNDER CONDITIONS OF VIBRATION AND DEFLECTION?

IF NOT, DESCRIBE PROBLEM?

(d) ARE CONTROL LEADS, ESPECIALLY CABLE TYPE, ARRANGED FOR EASE OF INSPECTION AND REPAIR? IF NOT, WHY?

3. WHAT MEANS ARE PROVIDED IN THE COCKPIT FOR CONTROL OF COOLING AIRFLOW?

4. WHAT MEANS ARE PROVIDED IN THE COCKPIT FOR CONTROL OF COOLING AIR THROUGH THE OIL COOLER?

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

D. PROPULSION SYSTEM CONTROLS (Cont)

5. LIST COCKPIT ELECTRICAL SWITCHES AND MECHANICAL PUSH-PULLS, ETC. REQUIRED FOR ENGINE OPERATION? _____

6. REMARKS

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

E. STARTING SYSTEM

1. WHAT TYPE STARTER IS USED? _____

(a) WHAT MANUFACTURER? _____ _____

2. ARE BOOSTER DEVICES PROPERLY MOUNTED? _____ _____

3. WHAT TYPE PRIMING SYSTEM IS USED? _____

(a) IS IT FURNISHED WITH THE ENGINE? ____ _____

(b) DOES ARRANGEMENT OF PRIMER AND STARTER SWITCHES PERMIT SIMULTANEOUS OPERATION WITH ONE HAND? _____ IF NOT, DESCRIBE WHAT IS REQUIRED ? _____

_____

4. WHAT MEANS ARE PROVIDED FOR SUPPLYING HEAT FOR STARTING THE ENGINE? _____

_____

5. AIR TURBINE STARTERS

(a) DOES THE PNEUMATIC NIPPLE CONNECTION AT THE SKIN OF THE AIRPLANE CONFORM TO THE STANDARD NAVY-AIR FORCE REQUIREMENTS TYPE? _____

(b) IS THE PNEUMATIC NIPPLE CONNECTION LOCATED IN SUCH A MANNER TO PROVIDE EASY ACCESS BY GROUND CREWS? _____

(c) IS THE AIR DUCTING FROM THE PNEUMATIC NIPPLE CONNECTION TO THE STARTER INSTALLED WITH A MINIMUM LENGTH, AND A MINIMUM NUMBER OF BENDS IN ORDER TO AVOID EXCESSIVE PRESSURE DROPS THROUGHOUT THE SYSTEM? _____
DESCRIBE? _____

_____

(d) IS THE STARTER AIR INLET DUCTING INSTALLED IN SUCH A MANNER SO AS TO NOT EXERT EXCESSIVE LOADS AND MOMENTS ON THE STARTER INLET SCROLL WHEN THE STARTER SYSTEM IS ENERGIZED? _____ DESCRIBE? _____

_____

(e) IS THE REQUIRED ELECTRICAL CONNECTION FOR THE STARTING SYSTEM PROVIDED IN THE SAME AREA AS THE PNEUMATIC NIPPLE CONNECTION? _____ ___
IF NOT, WHERE IS IT? _____

_____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the currentversion before use.

PART II (Cont)

E. STARTING SYSTEM (Cont)

(f) IS A SATISFACTORY START SWITCH PROVIDED IN THE COCKPIT FOR COMPLETE CONTROL OF THE STARTING CYCLE BY THE PILOT? _____
DOES THE CIRCUIT PROVIDE FOR AUTOMATIC SHUTOFF OF THE AIR SUPPLY WHEN THE STARTER CENTRIFUGAL SWITCH IS ACTUATED? _____
CAN THE PILOT ABORT THE START AT HIS OPTION, DURING ANY PART OF THE START CYCLE?

_____

6. HYDRAULIC STARTERS

(a) ARE THE PRESSURE AND RETURN LINES CLEARLY MARKED OR SIZE CODED TO PREVENT IMPROPER CONNECTING? _____

(b) ARE THE HYDRAULIC CONNECTIONS LOCATED IN SUCH A MANNER TO PROVIDE EASY ACCESS BY GROUND CREWS? _____

(c) ARE DRAINS PROVIDED? _____

(d) ARE OVERBOARD DRAINS PROVIDED? _____

7. IS SPACE PROVIDED FOR A GTS? _____
WHAT ARE THE FEATURES OF THIS INSTALLATION? _____

_____

_____

_____

8. REMARKS

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

F. COOLING SYSTEM

1. AIR DUCTS

(a) WILL DUCTS AND CONNECTION PERMIT EASE OF INSPECTION, REPLACEMENT AND REPAIR? _____ DESCRIBE? _____

(b) WHAT MEANS ARE PROVIDED IN AIR DUCTS TO PREVENT ACCUMULATION OF WATER, ETC? _____

(c) LIST THE FOLLOWING INFORMATION FOR ENGINE COOLING AIR DUCTS?

ITEM COOLED	SIZE	SHAPE	QUANTITY	LOCATION

(d) ARE COOLING AIR INLET DUCTS REQUIRED AND PROVIDED FOR OIL COOLERS? _____

(1) ARE COOLING AIR EXIT DUCTS REQUIRED AND PROVIDED FOR OIL COOLERS? _____

(2) IF EXIT DUCTS ARE NOT PROVIDED, WHAT PROVISION IS MADE FOR EXHAUSTING THE COOLING AIR? _____

(e) ARE COOLING AIR INLET DUCTS REQUIRED AND PROVIDED FOR INTERCOOLERS? _____

(1) ARE COOLING AIR EXIT DUCTS REQUIRED AND PROVIDED FOR INTERCOOLERS? _____

(2) IF EXIT DUCTS ARE NOT PROVIDED, WHAT PROVISION IS MADE FOR EXHAUSTING THE COOLING AIR? _____

2. WHAT MEANS ARE PROVIDED TO INSURE ADEQUATE COOLING OF ELECTRICAL GENERATORS, MAGNETOES, SPARK PLUG ELBOWS, ETC? _____

3. WHAT MEANS ARE PROVIDED TO COOL THE EXHAUST SYSTEM? _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the currentversion before use.

PART II (Cont)

F. COOLING SYSTEM (Cont)

4. STATE MAX CONTINUOUS AND MAX SHORT TERM COOLING TEMPERATURES FOR MAJOR ENGINE AND AIRFRAME SUPPLIED UNITS LOCATED IN THE NACELLE (SUCH AS ELECTRICAL POWER SOURCE STARTER, HYDRAULIC PUMPS, ETC.)? _____

_____

_____

_____

_____

_____

5. REMARKS

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

G. INDUCTION SYSTEM (RECIP. ENG.)

1. GENERAL

(a) ATTACH PAGES OF DESCRIPTIVE MATERIAL AND SCHEMATIC FROM MOCKUP BROCHURE, NOTING CHANGES?

(b) WHAT MEANS ARE PROVIDED TO PERMIT INDUCTION SYSTEM OPERATION UNDER ICING CONDITIONS? _____

(c) IS SOURCE OF ALTERNATE AIR ADEQUATELY PROTECTED FROM ENTRANCE OF RAIN, SNOW, ETC.? _____

(d) WHAT PROVISION IS MADE IN PREHEATER INSTALLATIONS FOR DISSIPATING HEAT WITH CONTROL IN FULL COLD POSITION? _____

2. INTAKE DUCTS

(a) LIST FOLLOWING INFORMATION FOR INTAKE DUCT ENTRANCES?

SIZE	SHAPE	QUANTITY	LOCATION

(b) WILL INTAKE DUCTS AND CONNECTIONS PERMIT EASE OF INSPECTION, REPLACEMENT, AND REPAIR? _____

3. INDUCTION AIR FILTERS

(a) IS AN INDUCTION AIR FILTER REQUIRED AND PROVIDED? _____

(b) WHAT IS ITS CAPACITY? _____

(c) WHERE IS IT LOCATED? _____

(d) ARE PROVISIONS (LESS FILTER ELEMENTS) INTEGRAL WITH THE AIRCRAFT? _____

(1) IF NOT, DOES THE COMPLETE ALTERNATE INSTALLATION PERMIT EASY AND RAPID INCORPORATION? _____

(e) WILL ALL INDUCTION AIR POSITIVELY PASS THROUGH THE FILTER DURING GROUND AND TAKE-OFF OPERATION? _____

(f) HOW CAN THE INDUCTION AIR FILTER BE BYPASSED TO AVOID LOSS OF RAM IN FLIGHT?

_____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

G. INDUCTION SYSTEM (RECIP. ENG.) (Cont)

4. INTERCOOLERS

(a) LIST THE FOLLOWING INFORMATION FOR INTERCOOLERS?

TYPE	SIZE	QUANTITY	LOCATION

5. TURBOSUPERCHARGERS

(a) WHAT TYPE TURBOSUPERCHARGER IS PROVIDED? _____

(b) WHAT TYPE AUTOMATIC CONTROL IS PROVIDED? _____

(1) DOES CONTROL GOVERN ALL SUPERCHARGER STAGES? _____

(c) WHERE IS TURBOSUPERCHARGER LOCATED? _____

6. REMARKS

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

H. INDUCTION SYSTEM (TURBO ENG.)

1. GENERAL

(a) ATTACH PAGES OF DESCRIPTIVE MATERIAL AND SCHEMATIC FROM MOCKUP BROCHURE, NOTING CHANGES?

(b) WHAT MEANS ARE PROVIDED FOR ENGINE ICE PREVENTION? _____

_____

2. INTAKE DUCTS

(a) WHAT TYPE OF INLETS ARE PROVIDED (FUSELAGE NOSE, NACELLE NOSE, WING LEADING EDGE, SCOOP, OR SUBMERGED)? _____

(b) ARE COVERS PROVIDED TO PREVENT FOREIGN OBJECTS FROM ENTERING INDUCTION SYSTEM WHEN THE AIRCRAFT IS ON THE GROUND? _____

(c) IN MULTIENGINE AIRCRAFT, ARE MEANS FOR CLOSING INLET OF DUCTS FOR CRUISING CONDITION PROVIDED? _____

(d) WHAT MEANS ARE PROVIDED FOR VARYING INLET AREA? _____

_____

(e) ARE ENGINE INLET SCREENS PROVIDED? _____ ARE THEY RETRACTABLE? _____

(f) IS THERE AN ALTERNATE AIR SOURCE? _____

(g) ARE THERE ANY PROVISIONS FOR LESSENING FOREIGN OBJECT DAMAGE TO THE ENGINE? _____

_____ DESCRIBE? _____

_____

_____

3. REMARKS

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

I. LUBRICATING SYSTEM

1. GENERAL

(a) WHAT PROVISION IS MADE FOR PREVENTING OIL SEEPAGE INTO THE ENGINE DURING SHUT-DOWN? _____

(b) IS AN OIL DILUTION SYSTEM PROVIDED? _____

(c) IS TURBO SUPERCHARGER EQUIPPED WITH A SEPARATE OIL SYSTEM? _____

(d) WHAT PROVISIONS ARE MADE FOR POSITIVE OIL SUPPLY TO ENGINES UNDER CONDITIONS OF NEGATIVE ACCELERATIONS/ZERO "G"? _____

_____

(e) WHAT MEANS ARE PROVIDED TO MAINTAIN OIL IN A FLUID STATE IF RESTARTS ARE REQUIRED UNDER CONDITIONS OF EXTREME COLD (HIGH ALTITUDE CRUISE, ETC.)? _____

_____

_____

(f) WHAT MEANS ARE PROVIDED FOR SUPPLYING HEAT TO THE OIL TANKS? _____

_____

(g) IS THE OIL SYSTEM COMPATIBLE FOR 1100 AND 1065 OIL (RECIP. ENGINES ONLY)? ____

_____ FOR MIL-L-7808 AND MIL-L-23699 (TURBINES ONLY)? _____

_____

(h) ARE EMERGENCY SHUT OFF VALVES PROVIDED? _____

(i) HOW ARE SHUT OFF VALVES INTERCONNECTED WITH OTHER SYSTEM SHUT OFFS? _____

_____

(j) IS PRESSURE OILING PROVIDED? _____

(k) WHAT COUPLINGS ARE USED? _____

(l) IS OIL LEVEL OR QUANTITY INDICATION PROVIDED? _____ DESCRIBE? _____

_____

2. OIL TANKS

(a) WHERE ARE OIL TANKS LOCATED? _____

(1) IS LOCATION SATISFACTORY WITH REGARD TO OIL PUMP INLET? _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

I. LUBRICATING SYSTEM (Cont)

(b) WHAT TYPE FILLER UNITS ARE PROVIDED FOR THE TANKS? _____

(1) ARE PROVISIONS MADE TO INSURE FILLER UNIT CAPS ARE IN PLACE AND SECURE? ____

_____

(2) ARE SCUPPERS AND DRAINS PROVIDED? _____

(c) IS OIL TANK SUMP DRAINABLE AND CLEANABLE? _____

(d) IS OIL TANK DESIGNED FOR QUICK WARMUP? _____

(e) ARE OIL LINE CONNECTIONS ON THE TANK LOCATED PROPERLY? _____

(f) HOW ARE OIL TANKS VENTED? _____

(g) HOW IS SERVICE OIL TANK CAPACITY INDICATED ON THE GROUND? _____

(1) HOW INDICATED IN FLIGHT (ESPECIALLY IMPORTANT IN OIL SYSTEM EMPLOYING TRANSFER SYSTEMS)? _____

_____

(h) IS AN AUXILIARY OIL TANK PROVIDED? _____

(1) WHAT MEANS ARE PROVIDED FOR MAINTAINING AUXILIARY OIL IN A FLUID STATE OF TRANSFER? _____

(i) WHAT PROVISION IS MADE FOR ACCESS TO EACH TANK? _____

3. OIL SYSTEM DRAINS

(a) WHERE ARE OIL SYSTEM DRAINS LOCATED? _____

_____

(b) WILL OIL DRAIN CLEAR OF AIRCRAFT STRUCTURE? _____

(c) IS MAIN DRAIN EQUIPPED FOR CONNECTION OF DRAIN HOSE? _____

4. OIL COOLERS

(a) LIST THE FOLLOWING INFORMATION FOR COOLERS?

TYPE	SIZE	QUANTITY	LOCATION

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

I. LUBRICATING SYSTEM (Cont)

4. (Cont)

(b) WHAT OIL TEMPERATURE CONTROL IS PROVIDED? _____

(c) IS CONTROL AUTO OR MANUAL, OR DOES IT COMBINE THESE TWO FEATURES? _____

_____ DESCRIBE? _____

_____

(d) IS OIL SYSTEM INTEGRAL WITH ENGINE? _____

5. MISCELLANEOUS

(a) ARE OIL LINES PROTECTED AND SUPPORTED TO PREVENT DAMAGE BY PERSONNEL DURING FLIGHT AND SERVICING OPERATIONS? _____

_____

(b) IS CLEARANCE BETWEEN OIL LINE AND HOT DUCTS AT LEAST FOUR INCHES? _____

IF NOT, WHAT PROTECTION TO LINES IS PROVIDED? _____

_____

(c) CAN ALL FITTINGS AND CONNECTIONS IN OIL LINES BE READILY INSPECTED? _____

_____

6. REMARKS

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

J. FUEL SYSTEM

1. GENERAL

(a) ARE PROVISIONS REQUIRED AND PROVIDED TO INSURE PROPER FUEL SYSTEM OPERATION AT HIGH ALTITUDE? _____ WHAT ARE THEY? _____

_____

(b) LIST THE FOLLOWING INFORMATION FOR THE FUEL FLOWMETERS?

TYPE	CAPACITY	QUANTITY	LOCATION

(c) WHAT MEANS ARE PROVIDED FOR SHUTTING OFF FUEL FROM THE ENGINE(S) IN CASE OF NACELLE FIRE? _____ WHERE LOCATED? _____

_____

(d) IN TURBO ENGINES, IS THE ENGINE COMPRESSOR AIR UTILIZED TO TRANSFER FUEL? _____ _____ IS THE AIR REGULATED? _____ ARE ZERO LEAK CHECK VALVES UTILIZED? _____

_____

(e) ARE PROVISIONS MADE FOR INFLIGHT REFUELING? _____

(1) IS THE PROBE PROPERLY LOCATED? _____ WHERE? _____

(2) IS THE PROBE RETRACTABLE? _____

(3) IS ANTI-ICING PROVIDED? _____

(f) IS FUEL DUMPING SYSTEM PROVIDED? _____ WHAT TYPE? _____ WHERE ARE DUMP CHUTES? _____

_____

(g) WHAT IS FUEL DUMPING RATE AND TIME TO DUMP? _____ WILL THE FUEL IMPINGE ON THE AIRCRAFT? _____ WHERE? _____

_____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

J. FUEL SYSTEM (Cont)

2. FUEL TANKS

(a) WHAT TYPE FILTER UNITS ARE PROVIDED FOR THE TANKS? _____
WHERE ARE THEY LOCATED? _____
ARE GROUNDING JACKS PROVIDED? _____

(1) ARE PROVISIONS MADE TO INSURE THE PRESSURE AND/OR GRAVITY FILLER UNIT CAPS ARE IN PLACE AND SECURE? _____

(2) ARE FILLER UNITS LOCATED TO PERMIT ALL TANKS TO BE COMPLETELY FILLED ON THE GROUND? _____

(3) ARE FILLER UNITS LOCATED SO NO FIRE HAZARD EXISTS FROM SPILLAGE DURING FUELING WITH THE ENGINE(S) RUNNING? _____

(4) ARE SCUPPERS AND DRAINS PROVIDED TO PREVENT FUEL SPILLED DURING FILLING OPERATIONS FROM DAMAGING SELF SEALING TANKS OR CAUSING A FIRE HAZARD? _____

_____

(5) ARE PRESSURE FUELING PRE-CHECKS PROVIDED? _____

(a) HOW MANY? _____

(b) WHERE? _____

(c) IS MASS LOADING PROVIDED? _____

(d) WHAT TYPE PRE-CHECKS (ELECTRIC, HYDRAULIC)? _____

(b) HOW ARE FUEL TANKS VENTED? _____

_____

(1) ARE MEANS PROVIDED TO PREVENT FUEL SPILLAGE AND SYPHONING THROUGH THE VENTS?

_____

(2) ARE VENTS SIZED FOR MAX FUELING VALVE FLOW? _____

(3) IS A VENT MONITOR GAGE PROVIDED ON THE GROUND FUELING PANEL? _____

(c) WILL TANKS PERMIT PROPER FUEL AVAILABILITY WITHIN REQUIRED FLIGHT ATTITUDES?

_____

(d) WHAT TYPE PRESSURE FUELING CONNECTIONS ARE PROVIDED? _____

(e) WHAT MEANS ARE PROVIDED FOR RAPID DEFUELING OF TOTAL FUEL? _____

_____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

J. FUEL SYSTEM (Cont)

(f) WHAT MEANS ARE PROVIDED FOR INDICATING THE QUANTITY OF FUEL IN EACH TANK IN FLIGHT? _____

(g) IS COUNTER-POINTER QUANTITY GAGE PROVIDED? _____

(h) DESCRIBE QUANTITY PRESENTATION IN COCKPIT? _____

_____

3. FUEL SYSTEM DRAINS

(a) HOW MANY DRAINS? _____

(b) WHERE ARE FUEL SYSTEM DRAINS LOCATED? _____

_____

(c) WHAT MEANS ARE PROVIDED FOR DRAINING FUEL LINE STRAINERS? _____

_____

(d) WHAT IS MICRON SIZE OF STRAINER? _____

(e) IS ANTI-ICING PROVIDED FOR THE STRAINER? _____ IS IMPENDING BY-PASS INDICATION PROVIDED IN THE COCKPIT? _____ WHERE? _____

_____

(f) WHERE IS FUEL LINE STRAINER LOCATED? _____

_____

(g) IN TURBO ENGINES PROVIDED WITH A MANIFOLD SUMP VALVE AND COMBUSTION CHAMBER DRAIN VALVE. IS THE FUEL COLLECTED? _____ IF SO, HOW IS IT DRAINED FROM THE COLLECTOR? _____

_____

(h) IS FUEL CONTROL DRAIN A SEPARATE OVERBOARD LINE? _____
ARE ANY DRAINS MANIFOLDED TOGETHER? _____ IF SO, WHICH ONE? _____

_____ IS THE MANIFOLD AT THE SKIN OR ELSEWHERE? _____

4. FUEL LINES

(a) ARE FUEL LINES ROUTED AS DIRECTLY AS PRACTICABLE? _____ IF NOT, DESCRIBE

_____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

J. FUEL SYSTEM (Cont)

(b) IS GRADIENT SUCH THAT LOCALIZED HIGH SUCTION POINTS ARE AVOIDED AND VAPOR LOCKING TENDENCIES MINIMIZED? _____ DEFINE PROBLEM AREAS? _____

_____

(c) ARE FUEL LINES SO LOCATED OR PROTECTED THAT DAMAGE DURING SERVICING OR OVERHAUL IS ELIMINATED? _____ DEFINE PROBLEM AREAS? _____

_____

(d) ARE MAIN FEED LINES SELF SEALING? _____ IF NOT, ARE THEY PROTECTED BY THE AIRCRAFT STRUCTURE? _____

5. TRANSFER FUEL PUMPS

(a) WHAT TYPE AND HOW MANY FUEL PUMPS ARE PROVIDED? _____

_____

(b) WHERE ARE THEY LOCATED? _____

_____

(c) IS LOCATION SUCH THAT PUMPS WILL DRAW FUEL FROM ALL TANKS AND WITH MINIMUM INLET SUCTION AT THE PUMP? _____

_____

6. FIXED FUEL TANKS

(a) ARE INTEGRAL TANKS USED? _____ HOW MANY ARE THERE? _____
WHERE LOCATED? _____

(b) ARE BLADDER CELLS EMPLOYED? _____ HOW MANY ARE THERE? _____
WHERE LOCATED? _____
HOW MANY SELF-SEALING? _____ WHERE LOCATED? _____

_____

(c) WHAT PROVISION IS MADE FOR ACCESS TO EACH TANK? _____

(d) CAN EACH SELF SEALING OR FLEXIBLE TANK BE INSTALLED WITHOUT EXCESSIVE DEFORMATION? _____

_____

(e) DOES TANK SUPPORT CAVITY HAVE ADEQUATE DRAINAGE PROVISIONS? _____

_____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

J. FUEL SYSTEM (Cont)

(f) CAN EACH TANK BE INSTALLED WITHOUT INTERFERING WITH OTHER TANKS? _____

_____

(g) IS THERE AN INSPECTION DOOR ON TOP OF EACH SELF SEALING OR FLEXIBLE TANK? ____

_____

(h) CAN ENTIRE INTERIOR OF EACH TANK BE READILY INSPECTED THRU TANK INSPECTION DOORS WHEN TANKS ARE INSTALLED IN THE AIRCRAFT? _____

_____

(i) ARE AS MANY TANK FITTINGS AS PRACTICABLE MOUNTED ON INSPECTION DOORS OF SELF SEALING OR FLEXIBLE TANKS? _____

_____

(j) WHAT ACCESS IS PROVIDED TO INSPECT TANK FITTINGS? _____

_____

_____

7. ARE EXTERNAL AUXILIARY FUEL TANKS USED? _____ WHERE MOUNTED? _____

_____

8. MISCELLANEOUS

(a) ARE FUEL LINES PROTECTED AND SUPPORTED PROPERLY TO PREVENT DAMAGE BY PERSONNEL DURING FLIGHT AND SERVICING OPERATIONS? _____ IF NOT, DESCRIBE PROBLEM AREA? _____

_____

(b) CAN ALL FITTINGS AND CONNECTIONS IN FUEL LINES BE READILY INSPECTED FOR LEAKAGE? _____ IF NOT, GIVE DETAILS? _____

_____

(c) IS CLEARANCE BETWEEN FUEL LINES AND HOT DUCTS AT LEAST FOUR INCHES? _____

_____ IF NOT, HOW ARE LINES PROTECTED FROM HEAT? _____

_____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

J. FUEL SYSTEM (Cont)

9. AIR REFUELING SYSTEM

(a) INSTALLATION: CAN THE TANKER PACKAGE BE INSTALLED READILY? _____

_____

10. VALVES AND SWITCHES

(a) HOW MANY LEVEL CONTROLS ARE USED? _____ WHAT MAKE? _____

_____

(b) DO MOTOR OPERATED VALVES INCORPORATE STRAY ELECTRICAL VOLTAGE FIXES? _____

_____

(c) ARE PRESSURE SWITCHES MOUNTED SO THAT THEY ARE NOT LOW POINTS TO CATCH AND RETAIN MOISTURE? _____

(d) IS THE MAIN FUEL SHUT OFF VALVE MANUAL? _____
IF NOT, WHAT? _____

(e) ARE VALVES AND SWITCHES READILY ACCESSIBLE FOR MAINTENANCE? _____

_____

11. COCKPIT CONTROLS

(a) WHAT FUEL SYSTEM CONTROLS ARE IN THE COCKPIT? _____

_____

_____

(b) ARE LEVER LOCK SWITCHES USED? _____

WHERE? _____

_____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

J. FUEL SYSTEM (Cont)

12. REMARKS

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

K. AUXILIARY POWER PLANT

1. GENERAL

(a) ARE ADEQUATE STARTING PROVISIONS MADE AT THE POWER UNIT? _____ AT ENGINEER'S STATION? _____

(b) ARE OIL AND FUEL DRAINS PROVIDED? _____

(1) ARE OVERBOARD DRAINS PROVIDED? _____

(c) IS FUEL CUTOFF VALVE PROPERLY INSTALLED? _____

(d) LIST THE FOLLOWING INFORMATION FOR INLET AND OUTLET DUCTS?

	SIZE	LENGTH	LOCATION
INLET DUCT	_____	_____	_____
OUTLET DUCT	_____	_____	_____

(e) IS FIREPROOF ENCLOSURE PROVIDED? _____

2. POWER UNIT

(a) LIST THE FOLLOWING INFORMATION FOR AUXILIARY POWER UNIT INCLUDING AIR AND GAS TURBINE MOTORS?

TYPE	QUANTITY	LOCATION

(b) WHAT ACCESSORIES ARE DRIVEN BY THE AUXILIARY POWER UNIT (BY TYPE AND CAPACITY)?

_____

(c) WILL HOISTING PROVISIONS, HATCHES, ETC., PERMIT EASY AND RAPID INSTALLATION AND REMOVAL OF THE POWER UNIT? _____

(d) IS ACCESS PROVIDED TO PERMIT SERVICING OF ALL NECESSARY PARTS OF THE UNIT? ____

(e) CAN THE GENERATORS OR ALTERNATORS BE PARELLEL WITH THE ENGINE, THE ENGINE DRIVEN GENERATORS OR ALTERNATORS? _____

3. REMARKS

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

L. ELECTRIC POWER SYSTEM

1. THE POWER SUPPLY, MAJOR ITEMS HAVE BEEN MOCKED UP AND CHECKED FOR, TYPE, MOUNTING, AND ADEQUACY AS FOLLOWS?

(a) GENERATOR(S) _____

_____

(b) INVERTER(S) _____

_____

(c) CONVERTER(S) _____

_____

(d) BATTERY(IES) _____

_____

(e) CONTROL PANEL(S) _____

_____

(f) _____

2. ARE THE ABOVE ITEMS ACCESSIBLE FOR MAINTENANCE REPLACEMENT? _____

_____

3. ARE THE ABOVE ITEMS PROVIDED ADEQUATE COOLING? _____

4. IS BATTERY QUICK DISCONNECTABLE AT GROUND LEVEL BY AVERAGE HEIGHT SERVICE PERSONNEL FOR AN EMERGENCY DISCONNECT? _____

5. WHAT TYPE BATTERY INTAKE AND EXHAUST VENTING USED? _____

_____

6. IS GENERATOR INTAKE AND EXHAUST COOLING ADEQUATELY PROVIDED FOR? _____

_____

7. WHAT MEANS IS PROVIDED FOR ADEQUATELY COOLING GENERATOR AND OTHER ELECTRIC POWER ACCESSORIES? _____

_____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

L. ELECTRIC POWER SYSTEM (Cont)

8. IS AREA SURROUNDING GENERATOR TERMINALS AND COOLING DUCTS SUFFICIENTLY OPEN TO PREVENT DAMAGE TO THE TERMINALS AND DUCTS DURING REMOVAL AND SERVICING OF GENERATOR OR NEARBY ACCESSORIES? _____

_____

LOCATION OF TERMINALS INTAKE AND EXHAUST DUCTS? _____

_____

9. GENERATOR MOUNTING HOLES USED ROUND, KEYHOLE SLOTS OR QUICK DISCONNECT? _____

_____

_____

10. ROUTING OF GENERATOR FEEDERS? _____

_____

11. ROUTING OF TUBING TO SUPPORT CSD'S AND LIQUID COOLED GENERATORS? _____

_____

_____

12. REMARKS

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

M. TRANSMISSIONS

1. TRANSMISSION SYSTEM (CONVENTIONAL DESIGN EMPLOYING ANTI-TORQUE ROTOR)

(a) DESCRIPTION

(1) ATTACH PAGES OF DESCRIPTIVE MATERIAL AND SCHEMATIC(S) FROM MOCKUP BROCHURE NOTING CHANGES?

(b) MAIN GEARBOX

(1) CAN MAIN GEARBOX BE READILY REMOVED/INSTALLED AS A UNIT WITH ACCESSORIES IN PLACE? _____

(2) ARE HOISTING PROVISIONS ADEQUATE? _____

(3) ARE SPECIAL ADAPTERS, SLINGS, OR OTHER HANDLING EQUIPMENT REQUIRED? _____

(4) DO AIRFRAME ATTACHMENT FITTINGS PERMIT RAPID REMOVAL/INSTALLATION? _____
ARE ATTACHING BOLTS EASILY ACCESSIBLE FOR TORQUEING? _____
AND INSPECTION? _____

(5) HOW MANY DISCONNECTS?

AIRFRAME _____

DYNAMIC _____

FLUID _____

ELECTRICAL _____

(6) IS A SUITABLE OIL QUANTITY INDICATOR PROVIDED? _____ TYPE? _____
CAN IT BE READ FROM THE DECK? _____

(7) CAN OIL QUANTITY INDICATOR BE MONITORED BY MECHANIC DURING SERVICING? _____

(8) IS OIL FILLER READILY ACCESSIBLE AND PROPERLY PLACARDED? _____

(9) IS OIL FILLER PROVIDED WITH A SUITABLE CLOSING DEVICE? _____
(FINGER)STRAINER? _____

(10) IS GEARBOX EQUIPPED WITH SUITABLE VENT? _____ VENT FILTER? _____

(11) ARE REMOTE INDICATING CHIP DETECTORS EASILY ACCESSIBLE FOR REMOVAL AND INSPECTION? _____

(12) ARE LUBE OIL STRAINERS EASILY ACCESSIBLE FOR REMOVAL AND INSPECTION? _____

(13) ARE EXTERNAL LUBE OIL LINES AND COMPONENTS ADEQUATELY SUPPORTED AGAINST VIBRATION OR CHAFFING DURING OPERATION OR DAMAGE DURING MAINTENANCE AND SERVICING? _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

M. TRANSMISSIONS (Cont)

(b) (Cont)

(14) ARE SUITABLE SCUPPERS AND DRAINS PROVIDED WHICH DRAIN CLEAR OF AIRCRAFT? ___

(15) HAVE SATISFACTORY ACCESS PROVISIONS BEEN MADE TO FACILITATE COMPLIANCE WITH ANTICIPATED PERIODIC MAINTENANCE REQUIREMENTS? _____

(16) ARE PROVISIONS MADE FOR OIL DRAINING? _____ DRAIN HOSE CONNECTION? ___

(c) INTERMEDIATE GEARBOX

(1) CAN INTERMEDIATE GEARBOX BE READILY REMOVED/INSTALLED? _____

(2) ARE HOISTING PROVISIONS REQUIRED? _____ ADEQUATE? _____

(3) ARE SPECIAL ADAPTERS, SLINGS, OR OTHER HANDLING EQUIPMENTS REQUIRED? _____

(4) DO AIRFRAME ATTACHMENT FITTINGS PERMIT RAPID REMOVAL/INSTALLATION? _____
ARE ATTACHING BOLTS EASILY ACCESSIBLE FOR INSPECTION/TORQUEING? _____

(5) IS A SUITABLE OIL QUANTITY INDICATOR PROVIDED? _____ TYPE? _____
CAN IT BE READ FROM THE DECK? _____

(6) CAN OIL QUANTITY INDICATOR BE MONITORED BY MECHANIC DURING SERVICING? _____

(7) IS OIL FILLER READILY ACCESSIBLE AND PROPERLY PLACARDED? _____

(8) IS OIL FILLER PROVIDED WITH SUITABLE CLOSING DEVICE AND (FINGER) STRAINER?

_____

(9) IS GEARBOX EQUIPPED WITH SUITABLE VENT? _____ VENT FILTER? _____

(10) ARE REMOTE INDICATING CHIP DETECTORS READILY ACCESSIBLE FOR INSPECTION? ____

(11) ARE SUITABLE SCUPPERS AND DRAINS PROVIDED? _____

(12) HAVE PROVISIONS BEEN MADE FOR DRAINING OIL? _____ DRAIN HOSE CONNECTIONS?

_____

(13) HAS SATISFACTORY ACCESS BEEN PROVIDED TO FACILITATE COMPLIANCE WITH ANTICIPATED PERIODIC MAINTENANCE REQUIREMENTS? _____

(d) TAIL GEARBOX

(1) CAN TAIL GEARBOX BE READILY REMOVED/INSTALLED? _____

(2) ARE HOISTING PROVISIONS REQUIRED? _____ ADEQUATE? _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

M. TRANSMISSIONS (Cont)

(d) (Cont)

(3) ARE SPECIAL ADAPTERS, SLINGS OR OTHER HANDLING EQUIPMENTS REQUIRED? _____

(4) DO AIRFRAME ATTACHMENT FITTINGS PERMIT RAPID REMOVAL/INSTALLATION? _____
ARE ATTACHING BOLTS EASILY ACCESSIBLE FOR INSPECTION/TORQUEING? _____

(5) IS A SUITABLE OIL QUANTITY INDICATOR PROVIDED? _____ TYPE? _____
CAN IT BE READ FROM THE DECK? _____

(6) CAN OIL QUANTITY INDICATOR BE MONITORED BY MECHANIC DURING SERVICING? _____

(7) IS OIL FILLER READILY ACCESSIBLE AND PROPERLY PLACARDED? _____

(8) IS OIL FILLER PROVIDED WITH SUITABLE CLOSING DEVICE AND (FINGER) STRAINER?

_____

(9) IS GEARBOX EQUIPPED WITH SUITABLE VENT? _____ VENT FILTER? _____

(10) ARE REMOTE INDICATING CHIP DETECTORS READILY ACCESSIBLE FOR INSPECTION? _____

(11) ARE SUITABLE SCUPPERS AND DRAINS PROVIDED? _____

(12) HAVE PROVISIONS BEEN MADE FOR DRAINING OIL? _____ DRAIN HOSE
CONNECTION? _____

(13) HAS SATISFACTORY ACCESS BEEN PROVIDED TO FACILITATE COMPLIANCE WITH
ANTICIPATED PERIODIC MAINTENANCE REQUIREMENTS? _____

(e) COMBINING GEARBOX

(1) IS COMBINING GEARSECTION INTEGRAL WITH MAIN GEARBOX OR IS IT A SEPARATE
REMOTE GEARBOX? INTEGRAL? _____ SEPARATE? _____ IF INTEGRAL,
DISREGARD ITEMS (2) THROUGH (17).

(2) CAN COMBINING GEARBOX BE READILY REMOVED/INSTALLED AS A UNIT WITH ACCESSORIES
IN PLACE? _____

(3) ARE HOISTING PROVISIONS ADEQUATE? _____

(4) ARE SPECIAL ADAPTERS, SLINGS, OR OTHER HANDLING EQUIPMENT REQUIRED? _____

(5) DO AIRFRAME ATTACHMENT FITTINGS PERMIT RAPID REMOVAL/INSTALLATION? _____
ARE ATTACHING BOLTS EASILY ACCESSIBLE FOR TORQUEING? _____
AND INSPECTION? _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the currentversion before use.

PART II (Cont)

M. TRANSMISSIONS (Cont)

(e) (Cont)

(6) HOW MANY DISCONNECTS?

AIRFRAME _____

DYNAMIC _____

FLUID _____

ELECTRICAL _____

(7) IS A SUITABLE OIL QUANTITY INDICATOR PROVIDED? _____ TYPE? _____
CAN IT BE READ FROM THE DECK? _____

(8) CAN OIL QUANTITY INDICATOR BE MONITORED BY MECHANIC DURING SERVICING? _____

(9) IS OIL FILLER READILY ACCESSIBLE AND PROPERLY PLACARDED? _____

(10) IS OIL FILLER PROVIDED WITH A SUITABLE CLOSING DEVICE? _____

(11) IS GEARBOX EQUIPPED WITH SUITABLE VENT? _____ VENT FILTER? _____

(12) ARE REMOTE INDICATING CHIP DETECTORS EASILY ACCESSIBLE FOR REMOVAL AND INSPECTION? _____

(13) ARE LUBE OIL STRAINERS EASILY ACCESSIBLE FOR REMOVAL AND INSPECTION? _____

(14) ARE EXTERNAL LUBE OIL LINES AND COMPONENTS ADEQUATELY SUPPORTED AGAINST VIBRATION OR CHAFFING DURING OPERATION OR DAMAGE DURING MAINTENANCE AND SERVICING? _____

(15) ARE SUITABLE SCUPPERS AND DRAINS PROVIDED WHICH DRAIN CLEAR OF THE AIRCRAFT?

_____

(16) HAVE SATISFACTORY ACCESS PROVISIONS BEEN MADE TO FACILITATE COMPLIANCE WITH ANTICIPATED PERIODIC MAINTENANCE REQUIREMENTS? _____

(17) ARE PROVISIONS MADE FOR OIL DRAINING? _____ DRAIN HOSE CONNECTIONS? _____

(f) ACCESSORY GEARBOX

(1) IS ACCESSORY GEARSECTION INTEGRAL WITH MAIN/COMBINING GEARBOX OR IS SEPARATE ACCESSORY GEARBOX EMPLOYED? _____ IF INTEGRAL, DISREGARD ITEMS (2) THROUGH (17).

(2) CAN ACCESSORY GEARBOX BE READILY REMOVED/INSTALLED AS A UNIT WITH ACCESSORIES IN PLACE? _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

M. TRANSMISSIONS (Cont)

(f) (Cont)

(3) ARE HOISTING PROVISIONS ADEQUATE? _____

(4) ARE SPECIAL ADAPTERS, SLINGS, OR OTHER HANDLING EQUIPMENT REQUIRED? _____

(5) DO AIRFRAME ATTACHMENT FITTINGS PERMIT RAPID REMOVAL/INSTALLATION? _____
ARE ATTACHING BOLTS EASILY ACCESSIBLE FOR TORQUEING? _____
AND INSPECTION? _____

(6) HOW MANY DISCONNECTS?

AIRFRAME _____

DYNAMIC _____

FLUID _____

ELECTRICAL _____

(7) IS A SUITABLE OIL QUANTITY INDICATOR PROVIDED? _____ TYPE? _____
CAN IT BE READ FROM THE DECK? _____

(8) CAN OIL QUANTITY INDICATOR BE MONITORED BY MECHANIC DURING SERVICING? _____

(9) IS OIL FILLER READILY ACCESSIBLE AND PROPERLY PLACARDED? _____

(10) IS OIL FILLER PROVIDED WITH A SUITABLE CLOSING DEVICE? _____

(11) IS GEARBOX EQUIPPED WITH SUITABLE VENT? _____ VENT FILTER? _____

(12) ARE REMOTE INDICATING CHIP DETECTORS EASILY ACCESSIBLE FOR REMOVAL AND INSPECTION? _____

(13) ARE LUBE OIL STRAINERS EASILY ACCESSIBLE FOR REMOVAL AND INSPECTION? _____

(14) ARE EXTERNAL LUBE OIL LINES AND COMPONENTS ADEQUATELY SUPPORTED AGAINST VIBRATION OR CHAFFING DURING OPERATION OR DAMAGE DURING MAINTENANCE AND SERVICING? _____

(15) ARE SUITABLE SCUPPERS AND DRAINS PROVIDED WHICH DRAIN CLEAR OF THE AIRCRAFT? _____

(16) HAVE SATISFACTORY ACCESS PROVISIONS BEEN MADE TO FACILITATE COMPLIANCE WITH ANTICIPATED PERIODIC MAINTENANCE REQUIREMENTS? _____

(17) ARE PROVISIONS MADE FOR OIL DRAINING? _____
DRAIN HOSE CONNECTIONS? _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the currentversion before use.

PART II (Cont)

M. TRANSMISSIONS (Cont)

(g) INPUT GEARBOX(ES)

(1) ARE SEPARATE GEARBOXES EMPLOYED TO CHANGE DIRECTION OF DRIVE AND/OR TO PROVIDE INITIAL STAGE(S) OF GEAR REDUCTION? _____
IF REMOTELY LOCATED INPUT GEARBOXES ARE NOT PROVIDED DISREGARD ITEMS (2) THROUGH (17).

(2) CAN INPUT GEARBOXES BE READILY REMOVED/INSTALLED AS A UNIT WITH ACCESSORIES IN PLACE? _____

(3) ARE HOISTING PROVISIONS ADEQUATE? _____

(4) ARE SPECIAL ADAPTERS, SLINGS, OR OTHER HANDLING EQUIPMENT REQUIRED? _____

(5) DO AIRFRAME ATTACHMENT FITTINGS PERMIT RAPID REMOVAL/INSTALLATION? _____
ARE ATTACHING BOLTS EASILY ACCESSIBLE FOR TORQUEING? _____
AND INSPECTION? _____

(6) HOW MANY DISCONNECTS?

AIRFRAME _____

DYNAMIC _____

FLUID _____

ELECTRICAL _____

(7) IS A SUITABLE OIL QUANTITY INDICATOR PROVIDED? _____ TYPE? _____
CAN IT BE READ FROM THE DECK? _____

(8) CAN OIL QUANTITY INDICATOR BE MONITORED BY MECHANIC DURING SERVICING? _____

(9) IS OIL FILLER READILY ACCESSIBLE AND PROPERLY PLACARDED? _____

(10) IS OIL FILLER PROVIDED WITH A SUITABLE CLOSING DEVICE? _____

(11) IS GEARBOX EQUIPPED WITH SUITABLE VENT? _____ VENT FILTER? _____

(12) ARE REMOTE INDICATING CHIP DETECTORS EASILY ACCESSIBLE FOR REMOVAL AND INSPECTION? _____

(13) ARE LUBE OIL STRAINERS EASILY ACCESSIBLE FOR REMOVAL AND INSPECTION? _____

(14) ARE EXTERNAL LUBE OIL LINES AND COMPONENTS ADEQUATELY SUPPORTED AGAINST VIBRATION OR CHAFFING DURING OPERATION OR DAMAGE DURING MAINTENANCE AND SERVICING? _____

(15) ARE SUITABLE SCUPPERS AND DRAINS PROVIDED WHICH DRAIN CLEAR OF THE AIRCRAFT? _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

M. TRANSMISSIONS (Cont)

(g) (Cont)

(16) HAVE SATISFACTORY ACCESS PROVISIONS BEEN MADE TO FACILITATE COMPLIANCE WITH ANTICIPATED PERIODIC MAINTENANCE REQUIREMENTS? _____

(17) ARE PROVISIONS MADE FOR OIL DRAINING? _____
DRAIN HOSE CONNECTIONS? _____

(h) FREEWHEELING UNITS

(1) ARE REMOTELY LOCATED FREE WHEELING UNITS EMPLOYED? _____
IF NOT, DISREGARD ITEMS (2) THROUGH (17).

(2) CAN FREEWHEELING UNITS BE READILY REMOVED/INSTALLED AS A UNIT WITH ACCESSORIES IN PLACE? _____

(3) ARE HOISTING PROVISIONS ADEQUATE? _____

(4) ARE SPECIAL ADAPTERS, SLINGS, OR OTHER HANDLING EQUIPMENT REQUIRED? _____

(5) DO AIRFRAME ATTACHMENT FITTINGS PERMIT RAPID REMOVAL/INSTALLATION? _____
ARE ATTACHING BOLTS EASILY ACCESSIBLE FOR TORQUING? _____
AND INSPECTION? _____

(6) HOW MANY DISCONNECTS?

AIRFRAME _____

DYNAMIC _____

FLUID _____

ELECTRICAL _____

(7) IS A SUITABLE OIL QUANTITY INDICATOR PROVIDED? _____ TYPE? _____
CAN IT BE READ FROM THE DECK? _____

(8) CAN OIL QUANTITY INDICATOR BE MONITORED BY MECHANIC DURING SERVICING? _____

(9) IS OIL FILLER READILY ACCESSIBLE AND PROPERLY PLACARDED? _____

(10) IS OIL FILLER PROVIDED WITH A SUITABLE CLOSING DEVICE? _____

(11) IS GEARBOX EQUIPPED WITH SUITABLE VENT? _____ VENT FILTER? _____

(12) ARE REMOTE INDICATING CHIP DETECTORS EASILY ACCESSIBLE FOR REMOVAL AND INSPECTION? _____

(13) ARE LUBE OIL STRAINERS EASILY ACCESSIBLE FOR REMOVAL AND INSPECTION? _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART II (Cont)

M. TRANSMISSIONS (Cont)

(h) (Cont)

(14) ARE EXTERNAL LUBE OIL LINES AND COMPONENTS ADEQUATELY SUPPORTED AGAINST VIBRATION OR CHAFFING DURING OPERATION OR DAMAGE DURING MAINTENANCE AND SERVICING? _____

(15) ARE SUITABLE SCUPPERS AND DRAINS PROVIDED WHICH DRAIN CLEAR OF THE AIRCRAFT? _____

(16) HAVE SATISFACTORY ACCESS PROVISIONS BEEN MADE TO FACILITATE COMPLIANCE WITH ANTICIPATED PERIODIC MAINTENANCE REQUIREMENTS? _____

(17) ARE PROVISIONS MADE FOR OIL DRAINING? _____
DRAIN HOSE CONNECTIONS? _____

(i) CLUTCH

(1) IS AN AUXILIARY CLUTCH INSTALLED FOR CLUTCHING/DECLUTCHING APP? _____

(2) IS CLUTCH READILY ACCESSIBLE FOR ADJUSTMENT AND ACCOMPLISHMENT OF ANTICIPATED PERIODIC MAINTENANCE REQUIREMENTS? _____

(j) DRIVE SHAFTING

(1) IS ALL DRIVE SHAFTING (OIL COOLER BLOWER, HIGH-SPEED INPUT, TAIL DRIVE, ETC.) READILY ACCESSIBLE FOR INSPECTION AND ACCOMPLISHMENT OF OTHER ANTICIPATED PERIODIC MAINTENANCE REQUIREMENTS? _____

(2) IS DRIVE SHAFTING PROTECTED FROM DIRECT IMPINGEMENT OF MOISTURE, RAIN, SALT SPRAY, ETC.? _____

(3) ARE DRIVE SHAFTING COMPONENTS (BEARINGS, COUPLINGS, ETC.) SHIELDED FROM EFFECTS OF HIGH TEMPERATURE, CORROSSIVE EXHAUST FUMES, ETC.? _____

(4) IS DRIVE SHAFTING PROVIDED WITH ADEQUATE VENTILATION/COOLING AS REQUIRED? _____

2. REMARKS

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE NAVY
NAVAL AIR SYSTEMS COMMAND
WASHINGTON, D.C. 20360

APPENDIX 4

AVIONICS - AIRCRAFT MOCKUP INSPECTION CHECKOFF LIST

MODEL _____ AIRCRAFT

CONTRACT NO. _____/FY ____

This AVIONICS checkoff list consists of the following parts:

PART I - ELECTRONICS (PAGES A-1 TO I-1)

PART II - ELECTRICAL DISTRIBUTION AND CONTROL (PAGE A-1)

PART III - INSTRUMENTS (PAGES A-1 TO A-5)

PART IV - NAVIGATIONAL EQUIPMENT (PAGE A-1)

FSC 6910

Prepared by: _____

Date: _____

NOTE: The abbreviation "N.A." used herein denotes "Not Applicable".

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART I - ELECTRONICS

This ELECTRONICS checkoff list consists of the following sections (cross out those sections listed below that are not applicable and omit from list):

A. ANTENNAS

B. COMMUNICATING EQUIPMENT

C. NAVIGATIONAL EQUIPMENT

D. RADAR

E. RADAR IDENTIFICATION EQUIPMENT

F. RADIO ALTIMETERS, ACCESSORIES, ETC.

G. INTERPHONE SYSTEM

H. COUNTERMEASURES EQUIPMENT

I. SPECIAL ELECTRONIC EQUIPMENTS

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART I

A. ANTENNAS

1. THE ANTENNA SYSTEMS ARE AS SKETCHED BELOW, AND AS IDENTIFIED BY LETTER. ANTENNA SWITCHING HARDWARE AND ASSOCIATED INTERFERENCE FILTERS ARE ALSO IDENTIFIED. _____

2. THE ABOVE ANTENNAS ARE LOCATED AS FOLLOWS: _____

3. ACCESSIBILITY IS PROVIDED AS FOLLOWS: _____

4. ALL ANTENNAS ARE CONTRACTOR FURNISHED EXCEPT THOSE LISTED BELOW: _____

5. THE ASSOCIATED TRANSMISSION LINE LENGTH TO EACH ANTENNA MEETS SPECIFICATION LIMITS EXCEPT AS NOTED BELOW: _____

6. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

B. COMMUNICATING EQUIPMENT

1. THE FOLLOWING COMMUNICATING EQUIPMENT HAS BEEN MOCKED UP: _____

2. THE ABOVE EQUIPMENTS ARE LOCATED AS FOLLOWS: _____

3. ACCESSIBILITY IS PROVIDED AS FOLLOWS: _____

4. ISOLATION OF EQUIPMENT FROM NOISE INDUCING EQUIPMENT HAS BEEN ACCOMPLISHED AS FOLLOWS: _____

5. CONTROL UNITS ARE ACCESSIBLE AND FREQUENCY OR CHANNEL-MARKINGS ARE CLEARLY VISIBLE TO THE PILOT AND/OR CREW MEMBERS. LOCATIONS ARE AS FOLLOWS: _____

6. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

C. NAVIGATIONAL EQUIPMENT

1. THE FOLLOWING NAVIGATIONAL EQUIPMENT HAVE BEEN MOCKED UP: _____

2. THE ABOVE EQUIPMENTS ARE LOCATED AS FOLLOWS: _____

3. ACCESSIBILITY IS PROVIDED AS FOLLOWS: _____

4. EMERGENCY POWER IS PROVIDED UNDER THE FOLLOWING CONDITIONS: _____

5. CONTROL UNITS ARE ACCESSIBLE AND FREQUENCY OR CHANNEL MARKINGS ARE CLEARLY VISIBLE TO THE PILOT AND/OR CREW MEMBERS. LOCATIONS ARE AS FOLLOWS: _____

6. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

D. RADAR

1. THE FOLLOWING RADAR EQUIPMENTS HAVE BEEN MOCKED UP: _____

2. THE ABOVE EQUIPMENTS ARE LOCATED AS FOLLOWS: _____

3. ACCESSIBILITY IS PROVIDED AS FOLLOWS: _____

4. CONTROL UNITS ARE ACCESSIBLE AND FREQUENCY OR CHANNEL MARKINGS ARE CLEARLY VISIBLE TO THE PILOT AND/OR CREW MEMBERS. LOCATIONS ARE AS FOLLOWS: _____

5. RADOMES ARE LOCATED AS FOLLOWS: _____

6. ISOLATION OF HIGH RADIATION COMPONENTS FROM SENSITIVE RECEIVING EQUIPMENTS HAS BEEN ACCOMPLISHED, EXCEPT AS FOLLOWS: _____

7. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

E. RADAR IDENTIFICATION EQUIPMENT

1. THE FOLLOWING RADAR IDENTIFICATION EQUIPMENTS HAVE BEEN MOCKED UP: ____

2. THE ABOVE EQUIPMENTS ARE LOCATED AS FOLLOWS: _____

3. ACCESSIBILITY IS PROVIDED AS FOLLOWS: _____

4. CONTROL UNITS ARE ACCESSIBLE AND FREQUENCY OR CHANNEL MARKINGS ARE CLEARLY VISIBLE TO THE PILOT AND/OR CREW MEMBERS. LOCATIONS ARE AS FOLLOWS: _____

5. REMARKS. -

Checked by: _____ _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

F. RADIO ALTIMETERS, ACCESSORIES, ETC.

1. THE FOLLOWING ACCESSORIES HAVE BEEN MOCKED UP: _____

2. THE ABOVE ACCESSORIES ARE LOCATED AS FOLLOWS: _____

3. ACCESSIBILITY AND CONTROL ARE PROVIDED AS FOLLOWS: _____

4. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

G. INTERPHONE SYSTEM

1. THE FOLLOWING INTERPHONE STATIONS HAVE BEEN MOCKED UP: _____

2. THE ABOVE STATIONS ARE LOCATED AS FOLLOWS: _____

3. REMOTE STATIONS THAT REQUIRE SERVICING AND MAINTENANCE ARE LOCATED AS FOLLOWS: _____

4. ADEQUATE AUDIO SWITCHES HAVE BEEN PROVIDED FOR RECEIVER SELECTION: ___

5. PRIVATE LINE COMMUNICATION BETWEEN ESSENTIAL CREW INTERPHONE STATIONS HAS BEEN PROVIDED: _____

6. POWER HAS BEEN PROVIDED TO THE SYSTEM UNDER EMERGENCY POWER CONDITIONS: __

7. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

H. COUNTERMEASURES EQUIPMENT

1. THE FOLLOWING COUNTERMEASURES EQUIPMENT HAVE BEEN MOCKED UP: _____

2. THE ABOVE EQUIPMENTS ARE LOCATED AS FOLLOWS: _____

3. ACCESSIBILITY AND CONTROL ARE PROVIDED AS FOLLOWS: _____

4. ISOLATION OF SENSITIVE RECEIVING COMPONENTS FROM HIGH RADIATION SOURCES HAS BEEN ACCOMPLISHED, EXCEPT AS FOLLOWS: _____

5. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART I (Cont)

I. SPECIAL ELECTRONIC EQUIPMENTS

1. THE FOLLOWING SPECIAL EQUIPMENTS HAVE BEEN MOCKED UP: _____

2. THE ABOVE SPECIAL EQUIPMENTS ARE LOCATED AS FOLLOWS: _____

3. ACCESSIBILITY AND CONTROL ARE PROVIDED AS FOLLOWS: _____

4. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART II

A. ELECTRICAL DISTRIBUTION AND CONTROL

1. ELECTRICAL DISTRIBUTION

(a) ELECTRICAL DISTRIBUTION CONTROLS HAVE BEEN MOCKED-UP? _____

(b) PROTECTIVE DEVICES (CIRCUIT BREAKERS) ARE ACCESSIBLE? _____

(c) JUNCTION BOXES, TERMINAL STRIPS, FEEDER WIRE, AND OTHER ELECTRICAL POWER DISTRIBUTION EQUIPMENTS HAVE OPTIMUM, MOUNTING, ACCESSIBILITY, AND PROTECTION? _____

_____

_____

(d) ELECTRICAL DISTRIBUTION EQUIPMENTS HAVE BEEN LOCATED WITH CONSIDERATION FOR ADEQUATE AIR VENTS AND MOISTURE PROTECTION? _____

_____

(e) GROUND SUPPORT CONNECTOR(S) AND ACCESS PLATES HAVE BEEN MOCKED-UP AND ARE ADEQUATE? _____

_____

2. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART III

A. INSTRUMENTS

1. WHAT INSTRUMENT PANELS ARE INSTALLED? _____

_____

(a) WHICH ARE SHOCK MOUNTED? _____

(b) HOW ARE PANELS SHOCK MOUNTED? _____

(c) IS PILOT(S) PANEL TILTED FROM VERTICAL? _____

(d) IF PANEL IS TILTED FROM VERTICAL, ARE GYRO INDICATORS MOUNTED SO AS TO COMPENSATE FOR THIS AND INDICATE PROPERLY IN FLIGHT? _____

2. WHAT IS PRIMARY POWER SUPPLY FOR BASIC FLIGHT INSTRUMENTS? _____

_____

(a) WHAT IS ALTERNATE OR EMERGENCY POWER SUPPLY? _____

3. ARE THE FOLLOWING INSTRUMENTS INSTALLED FOR GCA OR CCA LANDINGS?

RATE OF CLIMB _____ WHEEL POSITION INDICATOR _____

ALTIMETER _____ ENGINE INSTRUMENTS _____

AIRSPEED INDICATOR _____ RADIO ALTIMETER INDICATOR _____

HORIZON INDICATOR _____ HOOK POSITION INDICATOR(CCA ONLY) _____

COMPASS INDICATOR _____

4. WHAT AUTOPILOT IS INSTALLED? _____

(a) WHAT OTHER EQUIPMENT IS TIED-IN? _____

(b) IS ROLL, PITCH OR YAW STABILIZER INSTALLED? _____

5. WHAT MASTER COMPASS IS INSTALLED? _____

(a) WHICH INDICATOR IS USED? _____

(b) WHERE ARE THE FOLLOWING ITEMS LOCATED? _____

CONTROL PANEL _____

COMPENSATOR _____

MAGNETIC TRANSMITTER _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART III (Cont)

A. INSTRUMENTS (Cont)

6. WHERE IS LANDING GEAR INDICATOR LOCATED? _____

7. IS A THRUSTMETER OR ENGINE PRESSURE RATIO INDICATOR INSTALLED? _____

8. IS THE ACCELEROMETER MOUNTED FOR CONVENIENT RESETTING BY HAND? _____

   (a) IF TILTED, IS THE DIAL FACE WITHIN THE 10° OF THE VERTICAL IN NORMAL FLIGHT ATTITUDE? _____

9. IS THE CFE/GFE FUEL QUANTITY PRESENTATION SATISFACTORY? _____

   (a) IS A SEPARATE DIAL PROVIDED FOR EACH TANK? _____

   (b) IS A FUEL TOTALIZER DIAL PROVIDED? _____

   (c) IF SEVERAL TANKS ARE ON ONE DIAL, IS THE SWITCH SATISFACTORY? _____

10. WHAT IS THE POWER SOURCE FOR OPERATING AIR-DRIVEN GYRO INSTRUMENTS?

_____

   (a) WHAT AIR FILTERS ARE INCORPORATED? _____

11. WHERE IS PITOT (-STATIC) TUBE MOUNTED? _____

   (a) WILL IT BE A PERSONNEL HAZARD OR INTERFERE WITH PLANE HANDLING? _____

   (b) WHERE ARE STATIC VENTS LOCATED? _____

   (c) ARE TRAPS AND DRAINS PROVIDED TO REMOVE WATER FROM PITOT AND STATIC TUBE SYSTEMS? _____

12. LIST THE FOLLOWING INFORMATION FOR CFE PRESSURE SWITCHES.

USE	NAVAIR APPROVED	LOCATION

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART III (Cont)

A. INSTRUMENTS (Cont)

13. LIST FOLLOWING INFORMATION FOR ANGLE OF ATTACK SYSTEM.

(a) NAME OR DESCRIPTION _____

(b) ARE LANDING SIGNAL LIGHTS TIED-IN? _____

(c) IS STALL WARNING TIED-IN? _____

(d) IS FIRE CONTROL TIED-IN? _____

14. ARE ALL INSTRUMENTS AND COMPONENTS ACCESSIBLE FOR ADJUSTMENT AND EASY REMOVAL? _____

15. LIST THE FOLLOWING INFORMATION ON THE HEAD-UP DISPLAY(HUD)SYSTEM:

(a) NAME, NOMENCLATURE AND DESCRIPTION: _____

_____

_____

_____

_____

(b) ARE DAY AND NIGHT (RED) FILTERS PROVIDED? _____

(c) (1) ARE THERE ANY CONTROLS FOR THE HUD LOCATED ON CONTROL PANELS THAT ARE REMOTE FROM THE UNIT ITSELF? _____

(2) IF SO, WHERE ARE THEY LOCATED? _____

(3) ARE THEY EASILY REACHED BY THE PILOT IN ALL SEATING POSITIONS?

_____

(d) IS THE MANUAL BRIGHTNESS CONTROL READILY ACCESSIBLE TO THE PILOT IN ALL SEATING POSITIONS? _____

(e) IS THE MANUAL DEPRESSION CONTROL FOR THE BACKUP RETICLE EASILY CONTROLLED BY THE PILOT IN ALL SEATING POSITIONS? _____

(f) IS DESICCANT INSPECTION AND CHANGING WINDOW LOCATED SO THAT DESICCANT CAN BE CHANGED WITHOUT REMOVING THE DISPLAY UNIT FROM ITS MOUNT?

_____

(g) ARE ALL FUNCTION SWITCHES AND KNOBS ADEQUATELY LABELED? _____

(h) IS LIGHTING OF ALL CONTROL PANELS ADEQUATE? _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

PART III (Cont)

A. INSTRUMENTS (Cont)

16. LIST THE FOLLOWING INFORMATION FOR ALTIMETRY SYSTEM.

(a) ALTIMETER TYPE(S)? _____

(b) IF THERE IS AN AIR DATA COMPUTER, A ALTITUDE COMPUTER? _____

(1) IS ALTIMETER CONNECTED TO COMPUTER? _____

(2) IS COMPUTER TIED INTO IFF FOR MODE C INFORMATION? _____

(3) IS AIR DATA COMPUTER TIED INTO WEAPONS SYSTEM? NAVIGATION SYSTEM? AUTOPILOT SYSTEM? ETC.? _____

_____

_____

_____

_____

(c) IS ALTIMETER VIBRATOR ENERGIZED? _____

(d) IS ALTIMETER LIGHTING ENERGIZED? _____

17. VERTICAL DISPLAY.

(a) NAME OR DESCRIPTION? _____

(b) ARE DAY AND/OR NIGHT FILTERS PROVIDED? _____

(c) IS A CONTROL PANEL PROVIDED? _____

(d) IS A BRIGHTNESS CONTROL PROVIDED? _____

(e) IF BAROMETRIC ALTITUDE IS DISPLAYED, IS BAROMETRIC SETTING CONTROL PROVIDED? _____

18. MAP DISPLAY.

(a) NAME OR DESCRIPTION? _____

(b) IS A BRIGHTNESS CONTROL PROVIDED? _____

(c) IS A MAP SCALE SELECTOR SWITCH PROVIDED? _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART III (Cont)

A. INSTRUMENTS (Cont)

18. (Cont)

(d) IS A SLEWING CONTROL PROVIDED? _____ _____

IF MAP DISPLAY IS AN OPTICAL PROJECTION SYSTEM:

(a) IS A NORTH-UP-TRACK-UP SWITCH PROVIDED? _____

(b) IS A SPARE PROJECTION LAMP SWITCH PROVIDED? _____

(c) IS A DATA SWITCH PROVIDED? _____

19. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

PART IV

A. NAVIGATIONAL EQUIPMENT

1. WHAT NAVIGATION EQUIPMENT IS PROVIDED?

_____ _____ _____

_____ _____ _____

_____ _____ _____

_____ _____ _____

2. IS A NAVIGATIONAL RADAR OR RADAR INDICATOR PROVIDED? _____

3. ARE INTEGRATED NAVIGATION SYSTEM CONTROLS PROVIDED? _____

4. WHERE ARE THE CONTROLS LOCATED? _____

5. IS THE CONTROL PANEL SITUATED SO THAT THE OPERATOR CAN SEE IT AND OPERATE IT CONVIENTLY FROM HIS NORMAL WORK POSITION? _____

6. WHAT TYPE OF READ-OUT IS/ARE PROVIDED FOR NAVIGATION DATA? _____

7. WHERE IS/ARE THE READ-OUT(S) LOCATED? _____

8. IS IT PROPERLY LIGHTED? _____

9. IS IT VISIBLE TO THE READER FROM HIS USUAL WORKING POSITION? _____

10. ARE DIALS, SWITCH POSITIONS, ETC., PROPERLY, CLEARLY, LEGIBLY LABELED? _____

_____

_____

_____

_____

11. ARE OPERATING INSTRUCTION CHECK LISTS PROVIDED? _____

12. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE NAVY
NAVAL AIR SYSTEMS COMMAND
WASHINGTON, D.C. 20360

APPENDIX 5

ARMAMENT - AIRCRAFT MOCKUP INSPECTION CHECKOFF LIST

MODEL _____ AIRCRAFT

CONTRACT NO. _____/FY_____

This ARMAMENT checkoff list consists of the following sections (cross our those sections listed below that are not applicable and omit from list):

A. FIXED GUNS (PAGES A-1 TO A-3)

B. GUIDED MISSILES AND UNGUIDED ROCKETS (PAGES B-1 TO B-4)

C. FLEXIBLE WEAPONS (PAGES C-1 TO C-2)

D. DROPPABLE STORES (PAGES D-1 TO D-3)

E. FIRE CONTROL SYSTEM (PAGES E-1 TO E-2)

F. PASSIVE DEFENSE (PAGE F-1)

G. PYROTECHNICS (PAGES G-1 TO G-2)

H. MISCELLANEOUS (PAGE H-1)

FSC 6910

Prepared by: _____

Date: _____

NOTE: The abbreviation "N.A." used herein denotes "Not Applicable".

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

A. FIXED GUNS

1. GUN INSTALLATION

(a) WHERE ARE THE GUNS LOCATED? _____

(1) IS LOCATION SATISFACTORY IN REGARD TO FLASH? _____ GASES? _____

(2) WHAT IS VERTICAL ANGLE BETWEEN THE MEAN BORESIGHT ALIGNMENT AND THE LOW MACH NUMBER ZERO LIFT LINE? _____

(3) WHAT IS THE MINIMUM DISTANCE BETWEEN GUN MUZZLES AND AIR INTAKE DUCTS? _____

(b) WHERE ARE GUNS SEIZED BY MOUNTS TO ATTACH TO THE AIRCRAFT? _____

(c) WHAT GUN SELECTIVITY IS PROVIDED? _____

(d) CAN GUNS BE READILY BORESIGHTED THROUGHOUT REQUIRED RANGES WITH NO INTERFERENCE? _____

(1) CAN BORESIGHT BE RETAINED WHEN GUNS ARE REMOVED FOR CLEANING? _____

2. GUN CHARGING

(a) WHAT TYPE OF GUN CHARGING IS PROVIDED? _____

(b) ARE REMOTE CONTROL VALVES LOCATED FOR EASY ADJUSTMENT? _____

(c) WHAT TYPE OF CHARGER SAFETY IS EMPLOYED? _____

(d) IS ELECTRIC POWER REQUIRED TO SAFETY GUNS? _____

3. AMMUNITION PROVISION

(a) WHAT IS CAPACITY OF AMMUNITION BOXES OR COMPARTMENTS? _____

(1) IS EACH AMMUNITION BOX OR COMPARTMENT READILY ACCESSIBLE? _____

(2) IF AMMUNITION BOXES ARE OVERWEIGHT FOR EASY HANDLING, ARE HOISTING MEANS PROVIDED? _____

(b) WHAT TYPE OF AMMUNITION BELT BOOSTERS ARE PROVIDED? _____

(1) ARE THEY LOCATED TO POSITIVELY PROVIDE ALL GUNS WITH AMMUNITION? _____

(c) ARE FEED ROLLERS USED? _____

(1) DO THEY FIT LINKS PROPERLY? _____

(d) ARE THERE ANY PROJECTIONS WHICH CATCH AMMUNITION BELTS CAUSING FEED MALFUNCTIONS? _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

A. FIXED GUNS (Cont)

4. FEED AND EJECTION PROVISIONS

(a) ARE FEED AND EJECTION CHUTES SATISFACTORY FOR ALL GUN ADJUSTMENTS? _____

(b) ARE CHUTE ENDS OF SUFFICIENTLY LARGE RADIUS TO PREVENT JAMS? _____

(c) CAN FEED CHUTES BE READILY ATTACHED AND REMOVED? _____

(d) ARE EJECTION CHUTES ACCESSIBLE AND REMOVABLE? _____

(e) WHAT PROVISION IS MADE TO PREVENT DAMAGE TO THE AIRCRAFT BY EJECTED CASES AND LINKS? _____

_____

(f) WHAT IS LOCATION OF CASE AND LINK OPENINGS WITH RESPECT TO RAM AIR DUCTS? _____

_____

(g) IF CASES AND LINKS ARE RETAINED, IS THE RETENTION COMPARTMENT ADEQUATELY VENTILATED TO PREVENT THE ACCUMULATION OF EXPLOSIVE GASES? _____

(1) WILL THE COMPARTMENT CONTAIN THE REQUIRED AMOUNT OF CASES AND LINKS INTRODUCED AT RANDOM? _____

5. BLAST TUBES

(a) HOW ARE BLAST TUBES ATTACHED? _____

_____

(b) CAN GUNS BE BORESIGHTED THROUGHOUT THE REQUIRED RANGE WITH BLAST TUBES ATTACHED?

_____

(c) WHAT IS MINIMUM CLEARANCE BETWEEN CENTERLINE OF GUN BARREL AND BLAST TUBE WALL? _____

6. GUN COOLING

(a) WHAT PROVISION IS MADE FOR COOLING THE GUNS? _____

7. GUN HEATING

(a) WHAT TYPE OF GUN HEATING IS PROVIDED? _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

A. FIXED GUNS (Cont)

8. GUN ACCESSIBILITY

(a) CAN GUNS BE EASILY REMOVED AND REPLACED? _____

(b) IS ACCESSIBILITY SATISFACTORY FOR THE FOLLOWING:

(1) INSPECTION? _____

(2) ADJUSTMENT? _____

(3) CLEARING JAMS? _____

(4) CHANGING OR ADJUSTING ACCESSORIES? _____ (TRIGGER CONTROLS, FEEDERS, BOOSTERS CHARGERS, ETC.)

(c) DESCRIBE INSPECTION, SERVICING AND REARMING FACILITIES? _____

_____

_____

_____

9. REMARKS.-

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

B. GUIDED MISSILES AND UNGUIDED ROCKETS

1. GUIDED MISSILE AND ROCKET INSTALLATION (FOR EACH ITEM)

(a) RAIL OR EJECTION LAUNCHED? _____

(b) LOCATION STATION ON FUSELAGE, WING, ETC.? _____

(c) MINIMUM DISTANCE FROM AIR INTAKE DUCTS OF ENGINE FOR EACH LOCATION? _____

(d) WHAT IS ROCKET OR MISSILE CARRYING ANGLE? _____

(e) WHAT IS CLEARANCE FROM THE DECK? _____

(f) CAN ALL ELECTRICAL AND MECHANICAL CONNECTIONS BE ACCOMPLISHED? _____

(g) WHAT IS CLEARANCE DISTANCE OF MISSILE OR ROCKET NOZZLE FROM FUSELAGE, WING OR TAIL COMPONENTS? _____

(h) DO ALL PARTS OF MISSILE OR ROCKET CLEAR ALL STATIONARY AND MOVABLE AIRCRAFT PARTS? _____

(i) WHAT IS MAXIMUM TEMPERATURE OF THE EXHAUST GASES (EXPANDING FROM THE NOZZLE) THAT WILL INTERSECT ANY PART OF THE AIRCRAFT OVER THE OPERATIONAL ALTITUDE OF SERVICE USE AS REQUIRED BY THE AIRCRAFT SPECIFICATION? _____

(j) WILL THE AIRCRAFT LOCATION AND/OR STORE STATION OF THE MISSILE OR ROCKET BE SUBJECT TO EXCESSIVE, TEMPERATURE, VIBRATION AND FLUTTER, SHOCK, RF OR OTHER EXTREME ENVIRONMENT? _____

_____

(k) WHAT IS CLEARANCE DISTANCE FROM ANY SECTION OF JET ENGINE HEAT? _____

(l) ARE SAFETY AND ARMING DEVICES OF GUIDED MISSILE PROPULSION UNITS AND UNGUIDED ROCKETS ACCESSIBLE? _____

(m) ARE INSTRUCTION DECALS ON MISSILES AND ROCKETS ACCESSIBLE TO READ? _____

(n) WHAT PROVISIONS ARE MADE FOR BORESIGHTING _____
ALIGNMENT OF GUIDED MISSILES AND UNGUIDED ROCKETS? _____

(o) IS BOUNDARY LAYER CONTROL USED AND DOES HOT AIR IMPINGE ON ANY MISSILE OR ROCKET COMPONENT? _____

(p) WHAT EFFECT WILL MISSILE OR ROCKET IGNITION BLAST PRESSURE AND EXHAUST TEMPERATURE HAVE ON ANY PART OF THE AIRCRAFT?

(1) FINISH? _____

(2) SKIN? _____

(3) STRUCTURE? _____

(4) INTERNAL AIRCRAFT COMPONENTS SUCH AS WIRING, FUEL, ELECTRONICS, ENGINE FLAME OUT, ETC.? _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

B. GUIDED MISSILES AND UNGUIDED ROCKETS (Cont)

1. (Cont)

(q) WHAT EFFECT OF MISSILE OR ROCKET EJECTA HAVE ON ENGINE AND AIRCRAFT? _____

_____

2. CIRCUITRY AND WIRING

(a) IS SEPARATE CIRCUIT USED FOR EACH MISSILE, ROCKET OR ROCKET POD AT EACH STATION?

_____

(b) ARE SHIELDED WIRES AND ONLY RF RESISTANT CONNECTORS USED? _____

(c) ARE CIRCUITS LOCATED TO ELIMINATE INDUCED VOLTAGES AND LEAKAGE FROM OTHER CIRCUITS? _____ HAVE RADHAZ PROVISIONS BEEN INCORPORATED? _____

_____

(d) ARE ALL COMPONENT PARTS OF EACH CIRCUIT SEALED HEAVY DUTY COMPONENTS? _____

(e) ARE ALL COMPONENT PARTS AND OVERALL CIRCUIT SEALED FROM EFFECTS OF MOISTURE, SALT AND CORROSION? _____

(f) WHAT SAFETY FEATURES ARE PROVIDED IN CIRCUIT? _____

(g) WHAT PROVISIONS ARE MADE FOR BREAKING ELECTRIC FIRING CIRCUITS? _____

_____

(h) WHAT PROVISIONS ARE MADE FOR STRAY VOLTAGE CHECKING AT EACH STATION? _____

_____

(i) IS STANDARD CIRCUIT TESTER PROPOSED, WHICH ONE? _____

(j) WHAT PROVISIONS ARE MADE FOR GROUNDING THE AIRCRAFT AND EACH MISSILE AND EACH ROCKET STATION? _____

(k) WHAT TYPE OF CIRCUIT CHECKOUT SYSTEM IS PROVIDED BEFORE MISSILE AND ROCKET LOADING AND BEFORE ELECTRICAL HOOKUP? _____
WHAT LAST MOMENT CHECKS ARE REQUIRED? _____
ARE THEY SAFE? _____

(l) WHAT PROVISIONS ARE MADE FOR ACCESSIBILITY AND MAINTAINANCE OF COMPONENTS OF CIRCUIT? _____

(m) WHAT IS MINIMUM AVAILABLE AMPERAGE PER WEAPON STATION FOR ORDNANCE FIRING? _____

_____

3. WHAT GUIDED MISSILE AND ROCKET LAUNCHERS ARE INSTALLED FOR EACH MISSILE OR ROCKET ITEM

(a) ARE LAUNCHERS EASILY REMOVABLE? _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

B. GUIDED MISSILES AND UNGUIDED ROCKETS (Cont)

3. (Cont)

(b) ARE LAUNCHERS JETTISONABLE? _____

(c) WHAT TYPE OF POWER IS USED TO OPERATE LAUNCHERS? _____

(d) WHAT SELECTIVITY FOR FIRING IS PROVIDED? _____

(1) TYPE OF INTERVALOMETER OR PROGRAMMER IN COCKPIT AND RANGE OF FIRING TIMES? _____

_____

(2) CAPABILITY FOR SINGLE AND MULTIPLE FIRINGS? _____

(e) INTERFACE RELATIONSHIPS - WHAT ARE THE CLEARANCES OF LAUNCHERS WITH AIRCRAFT STATIONARY AND MOVABLE PARTS? _____

(f) ARE ALL MISSILES AND ROCKETS FIRED THRU UMBILICAL PLUGS? _____
STANDARD DESIGN? _____

4. GUIDED MISSILE AND ROCKET LOADING

(a) HOW ARE ITEMS LOADED, MANUALLY OR HOIST, FROM DOLLY, ETC.? _____

(b) WHAT ARE THE ACCESSIBILITY AND CLEARANCES TO LOAD? _____

(c) IS POWER NECESSARY FOR LOADING OPERATIONS? _____

(d) HOW IS POWER SUPPLIED? _____

(e) CAN MISSILES AND ROCKETS BE LOADED WITH WINGS FOLDED AND UNFOLDED? _____
SWEPT/UNSWEPT? _____

(f) WHAT IS LOADING TIME FOR MISSILES AND ROCKETS WITH WINGS UNFOLDED, WINGS FOLDED, SWEPT/UNSWEPT? _____

5. GUIDED MISSILE AND ROCKET LAUNCHING AND JETTISONING

(a) DO MISSILES AND UNGUIDED ROCKETS CLEAR THE AIRCRAFT UNDER ALL LAUNCHING CONDITIONS I.E., UNDER MAXIMUM G CONDITIONS, POSITIVE AND NEGATIVE? _____

(b) DO MISSILES AND UNGUIDED ROCKETS CLEAR THE AIRCRAFT UNDER ALL JETTISONING CONDITIONS, I.E., UNDER MAXIMUM G CONDITIONS, POSITIVE AND NEGATIVE? _____
ANY SPEED OR OTHER RESTRICTIONS? _____

(c) DO EMPTY AND FULL ROCKET PODS, JETTISONABLE PYLONS CLEAR THE AIRCRAFT UNDER ALL JETTISONING CONDITIONS, POSITIVE AND NEGATIVE? _____
ANY SPEED OR OTHER RESTRICTIONS? _____

(d) ARE MEANS PROVIDED FOR JETTISONING THE ENTIRE LOAD OR INDIVIDUAL ITEMS? _____
HOW WILL JETTISONING BE ACCOMPLISHED, BY FIRING, BY EXPLOSIVE BOLTS, BY POWER ACTUATION, OR MANUALLY? _____

_____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

B. GUIDED MISSILES AND UNGUIDED ROCKETS (Cont)

5. (Cont)

(e) WHAT PROVISIONS ARE MADE TO INSURE RETENTION OF LAUNCHERS, GUIDED MISSILES AND ROCKETS DURING CATAPULT TAKE-OFF, ARRESTED LANDING AND BOLTERS (LAND AND TAKE-OFF)?

(f) WHAT ARE THE MAXIMUM TEMPERATURES OF MISSILE OR ROCKET UNDER AEROHEAT CONDITIONS CONSIDERING ALL INSTALLATION CONDITIONS AND AIRCRAFT HEAT SOURCES?

WHAT IS BEING DONE TO PREVENT OVERHEAT EFFECTS?

(g) WHAT IS THE EFFECT OF LAUNCHED MISSILES OR ROCKETS ON MISSILES OR ROCKETS REMAINING ON THE AIRCRAFT?
IF EFFECT IS HARMFUL, WHAT IS BEING DONE TO CORRECT IT?

(h) ARE THERE ANY PRECAUTIONS AGAINST COOKED-OFF DUDS?

(i) REMARKS. -

Checked by:

Date:

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

C. FLEXIBLE WEAPONS

1. FLEXIBLE WEAPONS SYSTEM

(a) WHAT SYSTEMS ARE INSTALLED? _____

_____

(b) ARE SYSTEMS OPERABLE UNDER ALL FLIGHT CONDITIONS? _____

(c) IS WEAPONS PLATFORM LOCATION REALISTIC CONSIDERING AIRCRAFT ENVIRONMENT? _____

(d) HOW MANY MAN HOURS WILL BE REQUIRED TO REMOVE OR INSTALL THE WEAPONS PLATFORM ASSEMBLY? _____

(1) WHAT SPECIAL EQUIPMENT IS REQUIRED? _____

_____

(2) IS IT PROVIDED? _____

(e) ARE SYSTEM COMPONENTS EASILY ACCESSIBLE? _____

(f) DO SYSTEM COMPONENTS INTERFERE WITH AIRCRAFT OPERATION? _____

(g) CAN ANY SYSTEM COMPONENTS BE JETTISONED? _____

(h) ARE SYSTEM COMPONENTS READILY ACCESSIBLE FOR MAINTENANCE FROM THE GROUND OR WATER? _____

(i) IF RADAR COMPONENTS ARE INSTALLED, CAN THEY BE READILY REMOVED? _____

(j) WHAT COMPONENTS REQUIRE SPECIAL SHOCK MOUNTING DUE TO UNUSUAL FLIGHT OR LANDING LOADS? _____

_____

(k) WHAT STOWAGE IS PROVIDED FOR ACCESSORY EQUIPMENT? _____

_____

2. WEAPONS INSTALLATION

(a) WHAT WEAPONS ARE INSTALLED? _____

(b) ARE WEAPONS INSTALLED TO PROVIDE MAXIMUM FIRE COVERAGE? _____

(c) ARE WEAPONS INSTALLED TO PREVENT BLAST DAMAGE TO THE AIRCRAFT? _____

(d) ARE WEAPONS EASILY ACCESSIBLE? _____

(e) WHAT IS MINIMUM DISTANCE BETWEEN WEAPONS AND AIR INTAKE DUCTS? _____

(f) ARE SATISFACTORY FIRE INTERUPTERS PROVIDED? _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

C. FLEXIBLE WEAPONS (Cont)

2. WEAPONS INSTALLATION (Cont)

(g) WILL MUZZLE FLASH IMPAIR THE VISION, OR OTHERWISE ANNOY THE PILOT, COPILOT, NFO, OR OTHER CREW MEMBER? _____

(h) WHAT PROVISION IS MADE FOR MANUAL STOWAGE OF THE WEAPONS IN THE EVENT OF POWER FAILURE? _____

3. AMMUNITION PROVISION

(a) WHAT IS CAPACITY OF AMMUNITION BOXES? _____

(b) ARE AMMUNITION BOXES READILY ACCESSIBLE? _____

(c) ARE FEED AND EJECTION CHUTES SATISFACTORY FOR ALL WEAPON ANGLES? _____

(d) ARE EMPTY CASES AND LINKS EJECTED OVERBOARD? _____

(1) WHAT PROVISIONS ARE MADE TO PREVENT DAMAGE TO THE AIRCRAFT BY EJECTED CASES AND LINKS? _____

(e) IF EMPTY CASES AND LINKS ARE RETAINED, HOW ARE THEY COLLECTED? _____

_____

(1) WHAT IS CAPACITY OF CONTAINERS? _____

(2) CAN EMPTY CASES AND LINKS BE EASILY REMOVED? _____

(f) ARE CHUTE BENDS OF SUFFICIENTLY LARGE RADIUS TO PREVENT JAMS? _____

(g) ARE THERE ANY PROJECTIONS IN THE AMMUNITION BELT SYSTEM THAT WILL INTERFERE WITH THE AMMUNITION FLOW? _____

4. GENERAL

(a) WHAT PROVISIONS HAVE BEEN MADE FOR CLEANING AND DEICING SIGHTING AREAS AND WORKING SURFACES? _____

(b) HAVE LIGHTING AND VENTILATION PROVISIONS BEEN MADE FOR CLEANING AND DEICING SIGHTING AREAS AND WORKING SURFACES? _____

(c) WHAT RADOME OR ENCLOSURE IS LIKELY TO BE DAMAGED DURING GROUND OR FLIGHT OPERATION? _____

(d) WHERE ARE SYSTEM QUICK-DISCONNECTS LOCATED? _____

(e) WHERE ARE GROUND OR AFLOAT AUXILIARY POWER CONNECTIONS LOCATED? _____

(f) WHERE ARE TEST EQUIPMENT RECEPTACLES LOCATED? _____

5. REMARKS.-

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 20261O-17T10:44Z
Check the source to verify that this is the current version before use.

D. DROPPABLE STORES

1. STORES INSTALLATION

(a) WHERE ARE STORES LOCATED? _____

(b) WHAT IS PITCH PLANE ANGLE BETWEEN STORE CENTERLINE AND THE FLIGHT PATH OF AIRCRAFT IN AVERAGE CRUISE CONDITION? _____

(c) LIST CRITICAL CLEARANCE OF ALL STORE COMBINATIONS WITH ITEMS SPECIFIED BELOW:

STORE COMBINATION	LANDING GEAR	FLAPS	DECKS

(d) ARE ALL NECESSARY RECEPTACLES PROVIDED WITHIN REACH OF THE STORE MATING PLUGS? _____

(e) CAN SWAY BRACES BE EASILY ADJUSTED? _____

(1) ARE SPECIAL TOOLS REQUIRED? _____

(2) DO SWAY BRACES HAVE SUFFICIENT ADJUSTMENT TO ACCOMODATE ALL SPECIFIED STORES? _____

(f) CAN CARTRIDGES IN EJECTOR BOMB RACK BE READILY REPLACED? _____

(1) DOES EJECTOR BOMB RACK INSURE THAT ALL TYPES OF STORES TO BE CARRIED WILL CLEAR THE AIRCRAFT? _____

(2) HOW IS EJECTOR BOMB RACK OPERATED? _____

(3) CAN EJECTOR BOMB RACK BE READILY SERVICED IN THE AIRCRAFT WITHOUT COMPLETE DISASSEMBLY OF THE PYLON? _____

(g) HOW ARE TORPEDOES ATTACHED? _____

(1) WHAT SPECIAL BEAMS, SLINGS, OR BANDS ARE REQUIRED? _____

_____

(2) HOW IS STOP BOLT ATTACHED? _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

D. DROPPABLE STORES (Cont)

1. STORES INSTALLATION (Cont)

(g) (Cont)

(3) WHAT IS TORPEDO CARRYING ANGLE? _____

(4) IS THE TORPEDO NOSE CAP RELEASE AND TORPEDO DEPTH SETTING CONTROL READILY ACCESSIBLE FOR SERVICING? _____

(5) CAN THE TORPEDO STOP VALVE BE OPERATED WHILE THE TORPEDO IS ON THE AIRCRAFT? _____

(h) ARE SHACKLES, RACKS, RELEASES, AND EJECTOR OR DISPLACING GEAR READILY ACCESSIBLE FOR SERVICING AND REPLACEMENT? _____

2. BOMB BAY

(a) IS BOMB BAY LIGHTING ADEQUATE? _____

(b) IS THERE ANY POSSIBLE INTERFERENCE BETWEEN STORES AND CONTROL CABLES, ELECTRIC CABLES, AND HYDRAULIC LINES? _____

(c) IS VENTILATION SUFFICIENT TO INSURE THAT STORES REMAIN WITHIN SPECIFIED TEMPERATURE LIMITATIONS? _____

3. LOADING OF STORES

(a) HOW ARE STORES LOADED? _____

_____

(b) CAN ALL STORE LOADS BE HOISTED BY STANDARD EQUIPMENT? _____

(c) ARE PROVISIONS MADE FOR PORTABLE BOMB HOIST? _____

(d) ARE CLEARANCES SUFFICIENT FOR USE OF STANDARD SKIDS AND DOLLIES? _____

(e) ARE HOIST CABLES TO RACKS CONVENIENT? _____

(f) IS FUZE INSTALLATION POSSIBLE WITH STORES LOADED? _____

(g) CAN LOADING OPERATION BE CONTROLLED BY VISUAL SIGNALS OF THE ORDANCE GROUND CREW? _____

(h) CAN STORES BE LOADED WITH WINGS FOLDED AND UNFOLDED? _____ SWEPT? _____ UNSWEPT? _____

(i) IS THE ACTUAL LOADING TIME SATISFACTORY FOR ALL STORE COMBINATIONS WITH WINGS FOLDED AND UNFOLDED? _____ SWEPT? _____ UNSWEPT? _____

4. CONTROL SYSTEM

(a) WHAT TYPE OF CONTROL SYSTEM IS PROVIDED? _____

_____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the currentversion before use.

D. DROPPABLE STORES (Cont)

4. CONTROL SYSTEM (Cont)

(b) ARE ARMING CONTROLS PROVIDED FOR: ELECTRICAL FUSING? _____ MECHANICAL FUSING? _____

(1) CAN VISUAL CHECKS BE MADE FOR ARMED AND UNARMED STORES? _____

(c) HAS PROVISION BEEN MADE FOR DROPPING STORES ARMED, UNARMED, SALVO, RIPPLE, PAIRS AND SINGLY? _____

(1) ARE THE LOCATIONS OF INTERVAL CONTROLS READILY ACCESSIBLE FOR SERVICING AND REPLACEMENT? _____

(d) WHAT TYPE OF EMERGENCY RELEASE AND JETTISONING CONTROL ARE PROVIDED? _____

_____

(1) IS THE EMERGENCY SYSTEM INDEPENDENT OF THE MAIN SYSTEM? _____

(e) HAVE PROVISIONS BEEN MADE TO DROP STORES WITHOUT THE USE OF THE CONTROL SYSTEM? _____

(f) HAVE PROVISIONS BEEN MADE TO PREVENT UNDESIRABLE ELECTRICAL FEEDBACK FROM ARMAMENT CIRCUITS INTO THE CONTROL SYSTEM WHEN OTHER MODES OF OPERATION ARE DESIRED? _____

(g) CAN CONTINUITY OF ELECTRICAL SYSTEM TO THE EJECTOR BOMBRACK BE READILY CHECKED?

_____

(h) WHAT TYPE SECONDARY RELEASE SYSTEM IS INCORPORATED? _____

(i) HOW ARE BOMB BAY DOORS ACTUATED? _____

(1) HOW ARE DOORS CLOSED AFTER RELEASE OF STORES? _____

(2) WHAT PROVISION IS MADE TO INDICATE BOMB DOOR POSITION? _____

(3) WHAT PROVISION IS MADE TO PREVENT BOMB BAY DOORS FROM CLOSING ON ANY PROJECTING PART OF STORES (TORPEDO LANYARD, ROCKET LANYARD, CHEMICAL TANK EXHAUST PIPE, AND DISPLACING GEAR)? _____

_____

(4) CAN STORES BE RELEASED WITH BOMB BAY DOORS CLOSED? _____

(5) CAN STORES BE DROPPED IN AN EMERGENCY BY OPERATION OF A SINGLE CONTROL TO OPEN BOMB BAY DOORS AND DROP STORES? _____

(6) ARE ADEQUATE CONTROLS PROVIDED TO ASSURE SAFETY OF PERSONNEL WORKING IN AND AROUND THE BOMB BAY? _____

5. REMARKS.-

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

E. FIRE CONTROL SYSTEM

1. PILOT OPERATION SECTION

(a) WHAT TYPE OF SIGHT UNIT IS INSTALLED? _____

(1) WHERE IS SIGHT UNIT LOCATED? _____

(2) CAN SIGHT UNIT BE READILY BORESIGHTED? _____

(3) WILL SIGHT UNIT HOLD BORESIGHT UNDER VIBRATION? _____

(4) IS SIGHT UNIT ACCESSIBLE FOR CLEANING? _____ IS IT EASILY REMOVABLE? _____

(5) CAN SPARE BULBS BE EASILY RELOADED? _____

(b) WHAT IS DISTANCE FROM PILOT'S EYE TO SIGHT HEAD REFLECTOR GLASS (OR WINDSHIELD IF IT IS USED AS REFLECTOR)? _____

(1) IS PILOT'S EYE FREEDOM SUFFICIENT FOR COMFORT? _____

(2) CAN PILOT SEE ALL LEAD ANGLES WHICH WILL BE GENERATED WITHOUT UNDUE HEAD MOTION? _____

(c) WHAT IS DOWN ANGLE OVER THE NOSE? _____

(1) IS ENTIRE FIELD OF VIEW UNOBSTRUCTED EXCEPT FOR THE COWL? _____

(2) AT WHAT ANGLE IN MILS DOES COWL INTERFERE? _____

(3) IS THE ZERO LEAD POSITION LOCATED SO THAT THE PILOT HAS GOOD AROUND THE CLOCK VISIBILITY WHEN VIEWING THE ZERO LEAD BUNDLE? _____

2. GUNNER OPERATED SECTION

(a) WHAT TYPE OF SIGHT UNIT IS INSTALLED? _____

(1) WHERE IS SIGHT UNIT LOCATED? _____

(2) IS LOCATION FREE OF VISUAL OBSTRUCTION THROUGH ALL FIRING ANGLES? _____

(3) CAN SIGHT UNIT BE READILY BORESIGHTED? _____

(4) IS SIGHT UNIT ACCESSIBLE FOR CLEANING? _____ IS IT EASILY REMOVABLE? _____

(5) CAN SPARE BULBS BE EASILY RELOADED? _____

(b) IS RELATIONSHIP BETWEEN SIGHT UNIT AND GUNNER FIXED THROUGH ALL ANGLES OF FIRE? _____

(1) IF NOT, ARE ALL POSITIONS REQUIRED OF THE GUNNER SATISFACTORY? _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

E. FIRE CONTROL SYSTEM (Cont)

3. BOMBER OPERATED SECTION

(a) WHAT TYPE OF BOMBSIGHT AND/OR INDICATOR IS INSTALLED? _____

_____

(1) WHERE IS BOMBSIGHT AND/OR INDICATOR LOCATED? _____

_____

(2) IS THE BOMBSIGHT AND/OR INDICATOR EASILY VISIBLE FOR THE ATTACK MODE REQUIRED? _____

(3) ARE REQUIRED SIGHTING ANGLES PROVIDED? _____

(b) IS THE OPTICAL SYSTEM (PERISCOPE OR OTHERWISE) SATISFACTORY THROUGHOUT ITS REQUIRED RANGE? _____

(1) IS EXPOSED PORTION OF OPTICAL SYSTEM LOCATED TO AVOID OIL OR RESIDUE DEPOSIT FOGGING THE LINE OF SIGHT? _____

4. COMPONENTS

(a) ARE ALL REMOTE COMPONENTS PROPERLY LOCATED AS TO ORIENTATION OF AXES SHOCK MOUNTING, TEMPERATURE EXTREMES, VENTILATION REQUIREMENTS AND TEMPERATURE REQUIREMENTS? _____

(b) ARE COMPONENTS ACCESSIBLE FOR IN-PLACE TESTS, REPLACEMENT, OTHER NECESSARY SERVICING, ETC. BY GROUND CREWS? _____

(c) ARE MECHANICAL COUPLINGS BETWEEN COMPONENTS (FLEXIBLE SHAFTING AND THE LIKE) OR MINIMUM LENGTH CONSISTENT WITH REASONABLE COMPROMISES TO OTHER IMPORTANT EQUIPMENTS? _____

(d) ARE COMPONENTS MOUNTED ON A SINGLE PLATE INSTALLATION WHERE POSSIBLE? _____

(e) ARE ALIGNMENT INSTRUCTIONS PROVIDED? _____

(f) ARE THESE PROVISIONS FOR BORESIGHTING RADAR ANTENNAS, ANGLE OF ATTACK SENSORS, ETC.? _____

5. REMARKS.-

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

F. PASSIVE DEFENSE

1. ARMOR

(a) LIST THE FOLLOWING INFORMATION FOR THE ARMOR INSTALLATION:

CONE OF PROTECTION (INCLUDED ANGLE) (DEGREES)	LOCATION OF ARMOR	PLATE THICKNESS (INCHES) PROTECTION		WEIGHT SHOWN ON MOCKUP (ROUNDS)
		.50 Cal.	20mm frag.	

(b) IS ARMOR REMOVABLE? _____

(c) IS ARMOR USED STRUCTURALLY? _____

(d) WHAT EQUIPMENT IS PROTECTED BY ARMOR? _____

_____

(e) ARE SPLASH STRIPS PROVIDED? _____

(f) DOES ARMOR INTERFERE WITH FIELD OF SEARCH? _____

(1) DOES ARMOR INTERFERE WITH MOTION OF SERVICING OF GUNS? _____

2. BULLET RESISTANT GLASS

(a) WHERE IS BULLET RESISTANT GLASS PROVIDED? _____

(1) WHAT IS THICKNESS OF GLASS? _____

3. VULNERABILITY ASPECTS

(a) ARE VITAL COMPONENTS LOCATED TO TAKE FULL ADVANTAGE OF THE PROTECTION AFFORDED BY THE ARMOR PLATE AND HEAVY STRUCTURE DESIGNED INTO THE AIRPLANE? _____

(b) ARE COMPONENTS GROUPED TO PROVIDE MAXIMUM MUTUAL SCREENING AGAINST ATTACK? _____

4. REMARKS.-

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

G. PYROTECHNICS

1. PYROTECHNIC PISTOL

(a) WHAT TYPE PYROTECHNIC PISTOL IS INSTALLED? _____

(1) WHERE IS PISTOL LOCATED? _____

(2) IS IT CONVENIENT TO A CREW MEMBER? _____

(b) WHAT TYPE MOUNT IS PROVIDED? _____

(c) WHERE IS SIGNAL CARTRIDGE CONTAINER LOCATED? _____

(1) WHAT IS CAPACITY OF CARTRIDGE CONTAINER? _____

(d) ARE PISTOL AND CARTRIDGES IN CLOSE PROXIMITY? _____

2. PARACHUTE FLARES

(a) WHAT PROVISIONS ARE MADE FOR LAUNCHING THE FLARES? _____

_____

_____

(1) WHERE ARE LAUNCHING PROVISIONS LOCATED? _____

_____

(2) WHERE ARE CONTROLS LOCATED? _____

(3) WILL FLARES LAUNCH SATISFACTORILY AT DESIGNED SPEED OF THE AIRCRAFT? _____

(4) WHAT PROVISION IS MADE FOR CLEARING JAMS IN FLIGHT? _____

_____

(b) IS ACCESSIBILITY FOR LOADING AND UNLOADING IN FLIGHT SATISFACTORY? _____

(c) WHERE ARE PARACHUTE FLARES STOWED? _____

_____

(1) IS LOCATION EASILY ACCESSIBLE? _____

3. NIGHT DRIFT SIGNALS AND MARINE MARKERS

(a) WHERE ARE NIGHT DRIFT SIGNALS AND/OR MARINE MARKERS STOWED? _____

_____

(b) ARE PROVISIONS MADE FOR MECHANICAL LAUNCHING? _____

(c) IS LAUNCHER IN CLOSE PROXIMITY TO STOWAGE? _____

(d) DOES LAUNCHER INSURE POSITIVE LAUNCHING? _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

G. PYROTECHNICS (Cont)

4. FLOAT LIGHTS

(a) WHAT TYPE FLOAT LIGHT DISPENSER IS PROVIDED? _____

(b) WHERE IS IT LOCATED? _____

(c) HOW IS IT CONTROLLED? _____

(d) WILL IT OPERATE AT DESIGNED SPEEDS OF THE AIRCRAFT? _____

(e) IS HAND LAUNCHING REQUIRED? _____

(1) IF SO, DOES THE DESIGNATED CREW MEMBER HAVE EASY ACCESS TO FLOAT LIGHTS AND TO LAUNCHING CHUTES? _____

5. REMARKS.-

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

H. MISCELLANEOUS

1. CHEMICAL DISSEMINATION EQUIPMENT

   (a) WHAT TYPE CHEMICAL TANKS ARE CARRIED? _____

   (b) HOW ARE THEY CARRIED? _____

   (c) HOW IS DISCHARGE CONTROLLED? _____

   (d) WHAT TYPE CONTROL IS PROVIDED? _____

   (e) WHERE IS CONTROL LOCATED? _____

2. SONOBUOYS

   (a) LIST THE FOLLOWING INFORMATION FOR SONOBUOYS:

TYPE	QUANTITY	WHERE CARRIED

   (b) WHAT TYPE DISPENSER IS PROVIDED? _____

   (c) WHERE IS IT LOCATED? _____

   (d) HOW IS IT CONTROLLED? _____

   (e) WHERE IS CONTROL LOCATED? _____

   (f) WILL DISPENSER OPERATE AT DESIGNED SPEEDS OF THE AIRCRAFT? _____

3. ARE ALL GUN, BOMB DAMAGE ASSESSMENT, AND TORPEDO TRAINING CAMERA INSTALLATIONS SATISFACTORY FROM AN ARMAMENT STANDPOINT? _____

4. CAN PLANE BE REARMED WITH FUEL, DROPPABLE STORES, ROCKETS AND AMMUNITION SIMULTANEOUSLY? _____

   (1) IF NOT, DESCRIBE ARRANGEMENT. _____

   _____

5. ARE ALL MOCKED-UP PIECES OF ORDINANCE GEAR EXACT DUPLICATES OF ITEMS THEY REPRESENT INCLUDING KNOBS, CONTROLS, LEVERS, ETC.

   (1) IF NOT, HAS MOCKUP BEEN CHECKED TO ASSURE THAT NO COMPLICATIONS WILL ARISE WHEN DESIGNATED EQUIPMENT IS INSTALLED? _____

6. REMARKS.-

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the currentversion before use.

DEPARTMENT OF THE NAVY
NAVAL AIR SYSTEMS COMMAND
WASHINGTON, D. C. 20360

APPENDIX 6

SHIP INSTALLATIONS - AIRCRAFT MOCKUP INSPECTION CHECKOFF LIST

MODEL _____ AIRCRAFT

CONTRACT NO. _____/FY_____

This SHIP INSTALLATIONS checkoff list consists of the following sections (cross out those sections listed below that are not applicable and omit from list):

A. GENERAL (PAGES A-1 TO A-3)

B. CATAPULTING PROVISIONS (PAGES B-1 TO B-7)

C. ARRESTING PROVISIONS (PAGES C-1 TO C-3)

D. DECK HANDLING PROVISIONS (PAGES D-1 TO D-2)

FSC 6910

Prepared by: _____

Date: _____

NOTE: The abbreviation "N.A." used herein denotes "Not applicable".

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

A. GENERAL

1. LIST CRITICAL CLEARANCES OVER DECK FOR THE FOLLOWING:

	ARRESTED LANDING	CATAPULTING (INCLUDING ICCS)	ADEQUATE?
EXTERNAL AUXILIARY TANKS			
EXTERNAL ARMAMENTS			
HIGH LIFT DEVICE			
HIGH DRAG DEVICE			
STABILITY DEVICE			

2. ARE AIRCRAFT ENGINE STARTING, ELECTRICAL POWER, FUELING AND DEFUELING, NITROGEN, OXYGEN, HYDRAULIC, AND ENGINE OIL RECEPTICLES AND SERVICING PROVISIONS COMPATIBLE WITH THE CARRIER EQUIPMENT FOR WHICH IT WAS DESIGNED? _____

(a) WHERE IS EXTERNAL POWER RECEPTACLE FOR STARTING ENGINE(S) LOCATED? _____

3. DOES AIRCRAFT HAVE DUAL SINGLE POINT FUELING PROVISIONS? _____

(a) CAN BOTH BE UTILIZED SIMULTANEOUSLY WITHOUT INTERFERENCE WITH EACH OTHER OR ADJACENT AIRCRAFT STRUCTURE? _____

(b) WHERE IS FUEL FILLING STATION LOCATED? _____

(c) HOW IS ACCESS OBTAINED? _____

(d) WHAT IS FUEL FILLING TIME WITH PRESENT CARRIER EQUIPMENT? _____

(e) CAN WING FUEL TANKS BE FILLED WITH THE WINGS FOLDED/SWEPT? _____

(f) DOES SYSTEM PROVIDE FUEL QUANTITY GAGES ADJACENT TO FUELING STATIONS TO MONITOR FUEL QUANTITY FROM THE DECK? _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

A. GENERAL (cont.)

(g) CAN AIRCRAFT BE REFUELED THROUGH IN-FLIGHT REFUELING PROBE ON THE DECK?

4. CAN STORES BE LOADED AND GUNS AND OTHER EQUIPMENT BE SERVICED WITH THE WINGS FOLDED/SWEPT?

5. CAN FULL POWER ENGINE RUN-UPS BE DONE WITH WINGS FOLDED/SWEPT?

6. HOW IS WING FOLDING SECURING STRUT ARRANGED?

(a) CAN IT BE EASILY INSTALLED BY ONE MEMBER OF CREW?

7. LIST THE FOLLOWING INFORMATION FOR THE AIRCRAFT:

CONFIGURATION	OVERALL DIMENSIONS	EFFICIENT SPOTTING?	SATISFACTORY MOVEMENT ON ELEVATORS?	SATISFACTORY MOVEMENT ON HANGAR DECK?

8. WHAT IS MINIMUM ENGINE NOZZLE TO JET BLAST DEFLECTOR (JBD) DISTANCE?

(a) DESCRIBE IMPINGEMENT ON JBD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

A. GENERAL (Cont)

(b) WHAT WILL BE THE EFFECT OF JET BLAST ON THE DECK? _____

_____

(c) WHAT WILL BE EFFECT OF JET BLAST ON TAIL OF AIRCRAFT? _____

_____

(d) WILL RECIRCULATION OF EXHAUST GASSES LIKELY BE A PROBLEM? _____

_____

_____

(e) WILL THE JET BLAST AFFECT OPERATION OF THE ARRESTING HOOK? _____

_____

(f) WHAT WILL BE THE EFFECT OF THE JET BLAST ON SATS MATTING? _____

_____

9. WILL STEAM INGESTION BE A PROBLEM DURING CATAPULTING? _____

(a) MINIMUM DISTANCE ENGINE INLET(S) TO DECK _____

(b) MINIMUM DISTANCE ENGINE INLET(S) FROM AIRCRAFT CENTER LINE _____

(c) ENGINE INLET(S) AHEAD OR AFT OF SHUTTLE END OF LAUNCH BAR (IN TENSIONED POSITION)? HOW FAR? _____

_____

10. IS THERE ADEQUATE GROUND CLEARANCE FOR LANDING WITH SPEED BRAKES FULLY EXTENDED?

_____

(a) IF NOT, IS THERE PROVISION TO AUTOMATICALLY RETRACT THE SPEED BRAKES TO A SAFE POSITION WHEN THE LANDING GEAR IS EXTENDED? _____

(b) CAN THE PILOT OVERRIDE THIS AUTOMATIC FEATURE IN AN EMERGENCY? _____

11. REMARKS

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

B. CATAPULTING PROVISIONS

1. GENERAL

(a) WHAT MEANS ARE PROVIDED FOR ALL MEMBERS OF THE CREW TO BRACE THEMSELVES *DURING LAUNCHING?* _____

_____

_____

(b) ARE HEADRESTS PROVIDED? _____

FOR WHAT CREW STATIONS? _____

_____

(c) IS A CATAPULT THROTTLE GRIP PROVIDED WHICH WILL ALLOW THE PILOT TO HOLD THE THROTTLE(S)/POWER LEVER(S) STATIONARY DURING LAUNCHING WITH SHOULDER HARNESS LOCKED? _____

(1) FOR MILITARY THRUST POSITION? _____

(2) FOR MAXIMUM (AFTERBURNER) THRUST POSITION? _____

(d) CAN ICCS LIGHTS BE SEEN FROM COCKPIT (WITH EXTENDED STRUT, IF APPLICABLE)? _____

(e) IS NOSE GEAR STRUT DESIGN

(1) STORED ENERGY TYPE _____

(2) STIFF TYPE _____

(3) EXTENDED FOR LAUNCH _____

(4) OTHER _____

(5) DESCRIBE BRIEFLY _____

_____

_____

2. NOSE GEAR LAUNCH

(a) DESCRIBE OPERATION OF LAUNCH BAR MECHANISM _____

_____

_____

(b) WILL LAUNCH BAR REACH 7/8" BELOW DECK TO BE COMPATIBLE WITH FLUSH DECK INSTALLATION? _____

_____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

B. CATAPULTING PROVISIONS (Cont.)

(c) WILL LAUNCH BAR STEER NOSE GEAR DURING TRACKING? DESCRIBE _____

_____

_____

_____

_____

(d) DOES LOWER END OF LAUNCH BAR CONFORM TO NAEL(SI) DRAWING 607770? _____

(e) CAN LAUNCH BAR UPLOCK BE RELEASED BY:

(1) PILOT? _____

(2) DECK CREWMAN? _____

(f) WITH LAUNCH BAR IN UP POSITION,

(1) IS 360° NOSEWHEEL SWIVELING POSSIBLE? IF NOT, GIVE DETAILS

_____

_____

_____

(2) WHAT IS DECK CLEARANCE TO LAUNCH BAR? _____

(g) CAN LAUNCH BAR BE RETRACTED WHILE AIRBORNE WITHOUT RETRACTING NOSEGEAR? _____

_____

(h) DOES HOLDBACK AND RELEASE INSTALLATION HAVE TWO AXES OF MOVEMENT (HORIZONTAL AND VERTICAL)? _____

(i) WHERE IS AIRCRAFT HOLDBACK FITTING LOCATED? _____

_____

_____

(j) DOES AIRCRAFT HOLDBACK FITTING MOVE AT LEAST 15° TO EACH SIDE? _____

(1) HOW FAR? _____

(2) ARE STOPS PROVIDED? _____

(3) IS CENTERING PROVIDED? _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

B. CATAPULTING PROVISIONS (Cont.)

(k) IS THE HOLDBACK BAR A REPEATABLE TYPE, OR DOES IT USE A RELEASE ELEMENT (TENSION BAR)? _____

(l) DOES THE AIRCRAFT HOLDBACK FITTING EXCLUDE THE USE OF OTHER RELEASE ELEMENTS OR REPEATABLE HOLDBACK BARS? _____

_____

(m) DOES THE AIRCRAFT HOLDBACK FITTING HAVE A POSITIVE, INTEGRAL RETAINER FOR THE RUPTURED RELEASE ELEMENT? DESCRIBE _____

_____

_____

(n) DOES THE AIRCRAFT HOLDBACK FITTING INCORPORATE AN INDICATOR DEVICE WHICH WILL SHOW THAT THE INSTALLED RELEASE ELEMENT OR REPEATABLE RELEASE TYPE HOLDBACK FITTING IS PROPERLY SEATED? DESCRIBE _____

_____

_____

(o) IS THE RELEASE ELEMENT EASY TO INSERT (WITH GLOVES ON) INTO:

(1) AIRCRAFT HOLDBACK FITTING? _____

(2) HOLDBACK BAR? _____

(p) ARE THE RUPTURED PORTIONS OF THE RELEASE ELEMENT EASY TO REMOVE (WITH GLOVES ON) FROM:

(1) AIRCRAFT HOLDBACK FITTING? _____

(2) HOLDBACK BAR? _____

(q) DOES THE HOLDBACK BAR EXCLUDE THE USE OF RELEASE ELEMENTS NOT DESIGNED FOR IT?

_____

(r) DOES THE HOLDBACK BAR HAVE A POSITIVE, INTEGRAL RETAINER FOR THE RUPTURED RELEASE ELEMENT? DESCRIBE _____

_____

_____

(s) DOES THE HOLDBACK BAR INCORPORATE AN INDICATOR DEVICE WHICH WILL SHOW THAT THE INSTALLED RELEASE ELEMENT IS PROPERLY SEATED? DESCRIBE _____

_____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

B. CATAPULTING PROVISIONS (Cont.)

(t) CAN THE REPEATABLE RELEASE TYPE HOLDBACK BAR BE INSTALLED EASILY IN THE AIRCRAFT HOLDBACK FITTING? _____

(u) DOES THE REPEATABLE RELEASE TYPE HOLDBACK BAR HAVE A QUICK RELEASE OPERABLE BY DECK CREWMEN? _____

(v) IS THERE ADEQUATE CLEARANCE BETWEEN THE HOLDBACK BAR AND THE AIRCRAFT (WITH STORES) TO PRECULDE INTERFERENCE DURING RELEASE? _____

(w) IS HOLDBACK BAR AUTOMATICALLY ORIENTED WHEN INSTALLED SO THAT "TEE" WILL PROPERLY ENGAGE DECK HARDWARE? _____

(x) (1)WHERE IS THE COCKPIT CONTROL LOCATED? _____

(2) IS IT ACCESSABLE WITH SHOULDER HARNESS LOCKED? _____

(3) IS IT READILY VISIBLE WITH SHOULDER HARNESS LOCKED? _____

(4) DESCRIBE OPERATION _____

(y) IS A LAUNCH BAR RED WARNING LIGHT PROVIDED? DESCRIBE OPERATION _____

(z) IS WIDTH BETWEEN NOSE GEAR TIRES COMPATIBLE WITH NGL DECK RAMP? _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

B. CATAPULTING PROVISIONS (Cont.)

3. BRIDLE/PENDANT LAUNCH

(a) WHERE ARE CATAPULT HOOKS LOCATED? _____

_____

(b) IS CONTOUR CONDUCIVE TO POSITIVE SEATING OF LAUNCHING BRIDLE? _____

(c) HOW ARE HOOKS RETRACTED (IF RETRACTABLE)? _____

_____

(d) ARE CLEARANCES FOR EXTENDING HOOKS AND ATTACHING BRIDLE ADEQUATE? _____

(e) ARE CLEARANCES AROUND AND AFT OF HOOKS ADEQUATE FOR BRIDLE SHEDDING? _____

(f) WHERE IS AIRCRAFT HOLDBACK FITTING LOCATED? _____

_____

(g) IF RETRACTABLE, HOW IS AIRCRAFT HOLDBACK FITTING OPERATED? _____

_____

(h) ARE CLEARANCES FOR ATTACHING HOLDBACK AND RELEASE ASSEMBLY ADEQUATE? _____

(i) ARE CLEARANCES FOR SHEDDING HOLDBACK AND RELEASE ASSEMBLY ADEQUATE WITH AIRPLANE IN "RELEASE" ATTITUDE? _____

(j) DOES THE AIRCRAFT HOLDBACK FITTING EXCLUDE THE USE OF OTHER RELEASE ELEMENTS OR REPEATABLE HOLDBACK BARS? _____

(k) IS HOOK-UP OF BRIDLE/PENDANT VISIBLE FOR CHECK FROM REASONABLE DISTANCE AND POSITION? _____

(l) DOES THE AIRCRAFT HOLDBACK FITTING HAVE A POSITIVE, INTEGRAL RETAINER FOR THE RUPTURED RELEASE ELEMENT? DESCRIBE _____

_____

_____

(m) DOES THE AIRCRAFT HOLDBACK FITTING INCORPORATE AN INDICATOR DEVICE WHICH WILL SHOW THAT THE INSTALLED RELEASE ELEMENT OR REPEATABLE RELEASE TYPE HOLDBACK FITTING IS PROPERLY SEATED? DESCRIBE _____

_____

_____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

B. CATAPULTING PROVISIONS (Cont.)

(n) IS THE RELEASE ELEMENT EASY TO INSERT (WITH GLOVES ON) INTO:

(1) AIRCRAFT HOLDBACK FITTING? _____

(2) HOLDBACK AND RELEASE ASSEMBLY? _____

(o) ARE THE RUPTURED PORTIONS OF THE RELEASE ELEMENT EASY TO REMOVE (WITH GLOVES ON) FROM:

(1) AIRCRAFT HOLDBACK FITTING? _____

(2) HOLDBACK AND RELEASE ASSEMBLY? _____

(p) IS THE HOLDBACK AND RELEASE ASSEMBLY A REPEATABLE TYPE, OR DOES IT USE A RELEASE ELEMENT (TENSION BAR)? _____

_____

(q) DOES THE HOLDBACK AND RELEASE ASSEMBLY EXCLUDE THE USE OF OTHER RELEASE ELEMENTS? _____

(r) DOES THE HOLDBACK AND RELEASE ASSEMBLY HAVE A POSITIVE, INTEGRAL RETAINER FOR THE RUPTURED RELEASE ELEMENT? DESCRIBE _____

_____

_____

_____

(s) DOES THE HOLDBACK AND RELEASE ASSEMBLY INCORPORATE AN INDICATOR DEVICE WHICH WILL SHOW THAT THE INSTALLED RELEASE ELEMENT IS PROPERLY SEATED? DESCRIBE _____

_____

_____

(t) CAN THE REPEATABLE RELEASE TYPE HOLDBACK ASSEMBLY BE INSTALLED EASILY IN THE AIRCRAFT HOLDBACK FITTING? _____

(u) DOES THE REPEATABLE RELEASE TYPE HOLDBACK ASSEMBLY HAVE A QUICK RELEASE OPERABLE BY DECK CREWMEN? _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

B. CATAPULTING PROVISIONS (Cont.)

4. SATS

(a) IS LAUNCH BAR COMPATIBLE WITH SATS? _____

(b) WHAT TYPE OF BRIDLE IS REQUIRED FOR SATS? _____

(c) ARE BRIDLE/PENDANT CLEARANCES ADEQUATE? _____

(d) IS AIRCRAFT FUSELAGE/STORES SUSCEPTABLE TO DAMAGE BY HOLDBACK ASSEMBLY AT RELEASE? _____

_____

(e) IS NOSE WHEEL TIRE WIDTH COMPATIBLE WITH SATS DOLLY? _____

_____

_____

5. REMARKS.

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

C. ARRESTING PROVISIONS

1. WHAT TYPE ARRESTING HOOK INSTALLATION IS PROVIDED? (STINGER, "V" OR "Y" TYPE) _____

   (a) IF "V" OR "Y" TYPE, ARE DUAL DASHPOTS PROVIDED? _____

2. WHERE IS HOOK LOCATED? _____

   _____

   (a) IS DECK PENDANT SLAP LIKELY ON AFT FUSELAGE OR TAIL SURFACES? _____

   _____

   (b) DOES RAISING, LOWERING, OR LATERAL MOVEMENT OF THE HOOK INTERFERE WITH TAILWHEEL OR OTHER PARTS OF THE AIRCRAFT? _____

3. WHAT TYPE GUARDS ARE PROVIDED TO PREVENT THE ARRESTING WIRE FROM ENGAGING OR DAMAGING PARTS OF THE AIRCRAFT DURING ALL REASONABLE POSITIONS OF THE AIRCRAFT EXPECTED IN AN ARRESTED LANDING? _____

   _____

4. WILL THE HOOK BUMPER PREVENT DAMAGE TO THE AIRCRAFT FOR ANY LATERAL POSITION OF THE HOOK? _____

5. WHAT TYPE GUARD IS PROVIDED ON TAILWHEEL FOR SHEDDING THE ARRESTING WIRE? _____

   _____

6. WHAT IS NOSEWHEEL FLAT-TIRE ROLLING RADIUS? _____

   (a) WILL NOSEWHEEL PASS OVER DECK PENDANT? _____

7. IS HOOK CENTERING INCORPORATED? DESCRIBE _____

   _____

   _____

8. DESCRIBE OPERATION OF ARRESTING HOOK INSTALLATION, INCLUDING RETRACT, RELEASE AND EMERGENCY RELEASE _____

   _____

   _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

C. ARRESTING PROVISIONS (Cont.)

9. DESCRIBE FAIRING ATTACHED TO OR NEAR ARRESTING HOOK _____

(a) ARE CLEARANCES ADEQUATE TO PREVENT DAMAGE FROM DECK PENDANT OR SHANK?

10. WHAT PROVISION IS MADE FOR SERVICING HOOK SHOCK ABSORBER? _____

(a) DOES INSTALLATION PROVIDE GAGES FOR READILY CHECKING FLUID-AIR PRESSURES?

(b) DOES INSTALLATION PROVIDE AMBIENT TEMPERATURE VS. PRESSURE SERVICING DECAL (INSTRUCTIONS)? _____

(c) ARE FLUID AND AIR SERVICING POINTS READILY ACCESSIBLE TO GROUND CREW AND ARE THEY LOCATED NEAR GAGES TO MONITOR PRESSURES? _____

11. IS A DETACHABLE HOOKPOINT PROVIDED? _____

(a) DESCRIBE ATTACHMENT JOINT _____

(b) WHAT PROVISIONS ARE THERE FOR PREVENTING INCORRECT INSTALLATION OF THE HOOKPOINT? _____

12. IS AIRCRAFT COMPATIBLE WITH STANDARD BARRICADE (SIMULATED) SUCH THAT ONLY MINOR STRUCTURAL DAMAGE WILL BE SUSTAINED? _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the currentversion before use.

C. ARRESTING PROVISIONS (Cont.)

(a) WILL INSTALLATIONS ON THE NOSE OR FUSELAGE FORWARD OF THE WING ACT AS BARRICADE ENGAGEMENT POINTS? _____

_____

_____

_____

(b) DOES THE NOSEWHEEL PROVIDE A STRAP CUTTER INSTALLATION TO PREVENT INTERFERENCE WITH ARRESTMENT DUE TO STRAP ENTANGLEMENT BETWEEN THE WHEELS? _____

(c) ARE STRAP CUTTERS INSTALLED BETWEEN THE INLET SPLITTER PLATES AND THE FUSELAGE? _____

_____

(d) ARE STRAP RETENTION DEVICES (DETENTS) INSTALLED ALONG LEADING EDGE OF WING? _____

_____

_____

(e) WILL AIRCRAFT BOMB RACKS AND EXTERNAL STORE INSTALLATIONS ACT AS STRAP ENGAGING POINTS? _____

_____

_____

(f) IS COMPOSITION OF SKIN MATERIAL ON LANDING GEAR DOORS, VERTICAL STABILIZER, AND WING LEADING EDGES SUFFICIENT TO AID ARRESTMENT RATHER THAN CUTTING STRAPS? _____

_____

13. REMARKS.

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

D. DECK HANDLING PROVISIONS

1. WHAT TYPE TIEDOWN FITTINGS ARE PROVIDED? _____

   (a) WHERE ARE THEY LOCATED? _____

   _____

   (b) DOES THEIR LOCATION PROVIDE EFFICIENT ARRANGEMENT OF SECURING LINES? _____

   _____

   (c) WILL THEY PERMIT SECURING THE AIRCRAFT WITH WINGS FOLDED/SWEPT AND WINGS SPREAD?

   _____

   (d) ARE THE TIEDOWN FITTINGS SUITABLE FOR USE WITH STANDARD TIEDOWN EQUIPMENT PROVIDED ON CARRIERS? (MIL-T-81259) _____

   (e) CAN ALL TIEDOWN FITTINGS BE REACHED WITHOUT THE USE OF A LADDER? _____

   _____

   (f) WHAT PROVISIONS ARE MADE FOR SECURING THE AIRCRAFT DURING FULL POWER ENGINE RUNUPS? _____

   _____

2. WHAT PROVISIONS ARE MADE FOR ATTACHMENT OF STANDARD TOW BAR EQUIPMENT FURNISHED ON CARRIERS, INCLUDING AFT TOWING? _____

   _____

   (a) ARE SPECIAL TOW BARS REQUIRED? _____

   _____

   (b) ARE CLEARANCES ADEQUATE (INCLUDING TRACTOR WITH DRIVER UNDER AIRCRAFT).

   _____

   _____

3. IS THE AIRCRAFT COMPATIBLE WITH THE SD-1 SERIES SPOTTING DOLLIES? _____

   _____

   _____

   (a) CAN THE SPOTTING DOLLY BE ATTACHED FROM BEHIND THE NOSE GEAR? _____

   _____

   _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

D. DECK HANDLING PROVISIONS (Cont.)

4. DOES THE LAUNCH BAR INTERFERE WITH THE TOWBAR OR THE SPOTTING DOLLY?

5. JACKING

(a) ARE SPECIAL JACKS REQUIRED?

(b) LIST STANDARD JACKS THAT CAN BE USED TO:

(1) CHANGE NOSE WHEELS

(2) CHANGE MAIN WHEELS

(3) JACK ENTIRE AIRCRAFT

(c) ARE MAIN AND NOSE GEAR JACK PADS SUITABLE FOR CHANGING MAIN AND NOSE WHEELS ON FLIGHT DECK?

6. WHAT PROVISIONS ARE MADE FOR HOISTING?

7. REMARKS.

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE NAVY
NAVAL AIR SYSTEMS COMMAND
WASHINGTON, D.C. 20360

APPENDIX 7

SPECIAL EQUIPMENT AND SPECIAL SUPPORT EQUIPMENT -

AIRCRAFT MOCKUP CHECKOFF LIST

MODEL _____ AIRCRAFT

CONTRACT NO. _____/FY_____

This SPECIAL EQUIPMENT AND SPECIAL SUPPORT EQUIPMENT checkoff list consists of the following sections (cross out those sections listed that are not applicable and omit from the list):

A.	HOISTING	I.	HYDRAULICS
B.	JACKING	J.	LIQUID OXYGEN
C.	STARTING AND BOARDING	K.	PNEUMATIC SYSTEM
D.	MOORING	L.	AIR CONDITIONING
E.	SECURING	M.	AVIONICS
F.	HANDLING	N.	REARMING
G.	FUEL	O.	POWER PLANTS
H.	ENGINE OIL	P.	MISCELLANEOUS

FSC 6910

Prepared by: _____

Date: _____

NOTE: The abbreviation "N.A." used herein denotes "Not applicable".

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

A. HOISTING

1. ARE FITTINGS PROVIDED FOR HOISTING SLINGS? _____

2. ARE SEPARATE ADAPTERS REQUIRED? _____

3. CAN AIRPLANE BE HOISTED WITH WINGS FOLDED/SWEPT? _____

   (a) ARE AIRCRAFT HOIST FITTINGS AND HOISTING SLINGS ADEQUATE FOR AIRCRAFT HOISTING UNDER CRASH DAMAGE CONDITIONS RELATIVE TO HOISTING ANGLES, WEIGHT AND AIRCRAFT ATTITUDES AND ON BOARD SHIP? _____

4. WHAT ARE THE APPROXIMATE WEIGHTS AND WHAT PROVISIONS ARE MADE FOR HOISTING?

   (a) OUTER WING PANELS? _____

   (b) FIN? _____

   (c) STABILIZERS? _____

   (d) FLAPS? _____

   (e) CANOPY? _____

   (f) RADOME? _____

B. JACKING

1. WHAT NUMBER, HEIGHT AND CAPACITY OF JACKS ARE REQUIRED FOR AIRPLANE JACKING? _____

2. ARE JACK PADS REMOVABLE OR FIXED? _____

3. ARE JACK PADS PROVIDED ON EACH GEAR FOR TIRE CHANGING? _____

4. DO WHEEL JACK PADS PROVIDE CLEARANCE FOR STANDARD JACK UNDER FLAT TIRE CONDITIONS? _____

5. IF JACK PADS ARE REMOVABLE, ARE THEY INTERCHANGEABLE AT ALL LOCATIONS?

   _____

6. DOES THE NOSE WHEEL LOCK FORE AND AFT FOR SIDE MOUNT JACKING? _____

C. STARTING AND BOARDING

1. WHAT ARE STARTING AIR REQUIREMENTS? _____

2. CAN BOTH ENGINES START FROM A SINGLE AIR CONNECTION OR ARE THERE INDIVIDUAL CONNECTIONS AT EACH ENGINE? _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

C. STARTING AND BOARDING (Cont)

3. ARE CONNECTOR(S) CONVENIENTLY LOCATED? _____

4. WHAT ARE ELECTRICAL REQUIREMENTS FOR STARTING? _____

5. WHERE IS RECEPTACLE LOCATED? _____

6. IS A BOARDING LADDER REQUIRED FOR CREW ENTRY? _____

7. IF SO, ARE ATTACHMENTS PROVIDED ON THE AIRFRAME? _____

8. IS THE LADDER EASILY HANDLED AND SUITABLE FOR MAINTENANCE USE? _____

D. MOORING

1. ARE TIE-DOWN FITTINGS AT LEAST 3.2 SQ. INCHES OPENING AREA WITH A MINOR AXIS OF 1 INCH OR MORE? _____

2. CAN TIE-DOWN FITTINGS BE USED WITH WINGS FOLDED/SWEPT? _____

3. ARE FITTINGS PROVIDED FOR RESTRAINING THE AIRPLANE ON JACKS WITH LANDING GEAR CYCLED UP? _____

4. ARE FITTINGS ADEQUATE FOR HEAVY WEATHER SECURING? _____

E. SECURING

1. ARE LANDING GEAR DOWN LOCKS REQUIRED AND IF SO, EASY TO USE? _____

2. ARE INLET AND EXHAUST PLUGS INTERCHANGEABLE BETWEEN SIDES? _____

3. ARE PROVISIONS MADE AS REQUIRED FOR SECURING:

   (a) INLET AND EXHAUST PLUGS? _____

   (b) PROBE COVERS? _____

   (c) VENT AND OTHER PLUGS? _____

4. IS A CANOPY COVER REQUIRED AND IF SO ARE SECURING ATTACHMENTS PROVIDED?

   _____

5. ARE CONTROL SURFACE BATTENS REQUIRED AND IF SO ARE ATTACHMENTS PROVIDED? _____

6. ARE WING JURY STRUTS REQUIRED? IF SO, ARE THEY EASILY ATTACHED UNDER WING LOADS? _____

7. IS SAFETYING PROVIDED FOR EJECTION SEATS AND CANOPY JETTISON DEVICES?

   _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

F. HANDLING

1. CAN STANDARD TOW BAR BE USED FOR FORWARD/AFT TOWING? _____

2. CAN BRAKES BE USED WITHOUT EXTERNAL POWER? _____

3. WHAT DEGREE OF SWIVEL DOES THE NOSE WHEEL HAVE FOR TOWING AND HANDLING?

_____

G. FUEL

1. IS REFUELING/DEFUELING SINGLE POINT? _____

2. IF MORE THAN ONE ADAPTER IS USED ARE THEY AT LEAST 10 INCHES APART ON CENTERS? _____

3. IS ELECTRICAL POWER REQUIRED FOR FUELING/DEFUELING? _____

4. IS FUELING ADAPTER(S) EASILY ACCESSIBLE TO A MAN STANDING ON DECK? _____

5. ARE FUEL CAPACITANCE TEST JACKS LOCATED CONVENIENTLY? _____

H. ENGINE OIL

1. IS PRESSURE OILING ADAPTER EASILY ACCESSIBLE FROM THE DECK? _____

2. WHAT TYPE OF OIL QUANTITY GAGING IS PROVIDED? _____

I. HYDRAULICS

1. WHAT TYPE OF FLUID IS USED? _____

2. WHAT ARE PRESSURE AND FLOW REQUIREMENTS FOR EXTERNAL POWER? _____

3. ARE EXTERNAL TEST CONNECTIONS CONVENIENTLY LOCATED? _____

4. IS CONNECTION AT MORE THAN ONE LOCATION REQUIRED FOR SYSTEM TEST? _____

5. IS ELECTRICAL POWER REQUIRED FOR SYSTEM TEST? _____

6. IS HYDRAULIC FLUID SERVICING CONNECTOR CONVENIENTLY LOCATED? _____

7. IS RESERVOIR QUANTITY GAGING PROVIDED IN A CONVENIENT LOCATION? _____

8. ARE HYDRAULIC ACCUMULATOR SERVICING CONNECTIONS PROVIDED IN A CONVENIENT LOCATION? _____

9. IS AIR OR NITROGEN USED FOR ACCUMULATOR SERVICING? WHAT PRESSURE? _____

10. ARE AIR ACCUMULATOR GAGES PROVIDED IN A CONVENIENT LOCATION? _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

J. LIQUID OXYGEN

1. HOW MANY CONVERTERS ARE REQUIRED? _____ WHAT SIZE? _____

2. ARE CONVERTERS REMOVED FOR SERVICING OR SERVICED IN PLACE? _____

3. IF SERVICED IN PLACE HOW IS FULL INDICATION PROVIDED? _____

4. IS OVERFLOW LOCATED SO AS TO PROTECT SERVICING PERSONNEL? _____

K. PNEUMATIC SYSTEM

1. IS SYSTEM AN AIRBORNE COMPRESSOR OR BOTTLES? _____

2. IF BOTTLES WHAT PRESSURE REQUIRED FOR SERVICING? _____

3. WHERE ARE THE SERVICING CONNECTIONS LOCATED? _____

L. AIR CONDITIONING SYSTEM

1. WHAT TYPE OF SYSTEM (LIQUID CYCLE, AIR CYCLE, WATER BOILER)? _____

2. IS SPECIAL TEST EQUIPMENT REQUIRED? _____

3. WHAT ARE GOUND COOLING REQUIREMENTS? _____

4. WHERE ARE GROUND COOLING CONNECTIONS LOCATED? _____

M. AVIONICS

1. WHAT QUANTITY, TYPE AND FREQUENCY OF GROUND POWER IS REQUIRED FOR AVIONICS SYSTEMS LINE CHECKCUT? _____

2. TO WHAT EXTENT IS BUILT-IN TEST EQUIPMENT PROVIDED:

   (a) PERCENTAGE OF EQUIPMENT SELF CHECKED? _____

   (b) WHAT DISPLAYS ARE PROVIDED? _____

   (c) ARE HUMAN FACTORS CONSIDERED IN THE LOCATION OF DISPLAYS? _____

   (d) TO WHAT LEVEL DOES IT TEST? _____

3. TO WHAT EXTENT IS EXTERNAL TEST EQUIPMENT REQUIRED FOR LINE CHECKOUT:

   (a) WHAT PERCENTAGE OF EQUIPMENT REQUIRES EXTERNAL TEST EQUIPMENT? _____

      (1) FULLY AUTOMATIC? _____

      (2) SEMI-AUTOMATIC? _____

      (3) MANUAL? _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

M. AVIONICS (Cont)

(b) IS AIRPLANE CONFIGURATION COMPATIBLE WITH BACE? _____

(1) IS HARNESS INTEGRAL WITH AIRPLANE? _____

(2) WHAT IS VOLUME OF SPECIAL ADAPTERS REQUIRED? _____

(3) HOW MANY SEPARATE TEST CONNECTIONS ARE REQUIRED AND WHERE ARE THEY LOCATED? _____

(c) TO WHAT LEVEL DOES IT TEST? _____

(d) HOW MANY SEPARATE PIECES OF EQUIPMENT ARE REQUIRED FOR STIMULI GENERATORS, PROGRAMMERS, COMPARATORS, ADAPTERS? _____

(e) WHAT ARE THE COOLING REQUIREMENTS? _____

(f) WHAT ARE THE SIZE, WEIGHT AND MOBILITY CHARACTERISTICS OF THE EQUIPMENT? _____

4. ARE COMPONENTS ACCESSIBLE FOR READY REMOVAL FOR BENCH TEST? _____

5. CAN TRANSMITTERS BE TESTED UNDER R.F. SILENCE CONDITIONS WITHOUT THE USE OF SPECIAL TEST EQUIPMENT? _____

(a) WAVEGUIDE SWITCHES INTEGRAL? _____

(b) DUMMY LOADS INTEGRAL? _____

(c) COOLING INTEGRAL? _____

N. REARMING

1. IS ELECTRICAL OR HYDRAULIC POWER REQUIRED FOR REARMING? _____

2. WHAT IS THE VOLUME AND CONFIGURATION OF HANDLING EQUIPMENT REQUIRED FOR LOADING STORES? _____

(a) GOVERNMENT FURNISHED? _____

(b) CONTRACTOR FURNISHED? _____

O. POWER PLANTS

1. WHAT IS THE GENERAL ARRANGEMENT AND CONCEPT FOR ENGINE REMOVAL, INSTALLATION, TRANSPORTATION, MAINTENANCE? _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

O. POWER PLANTS (Cont)

2. WHAT SPECIAL EQUIPMENT IS REQUIRED FOR INSTALLATION AND REMOVAL:

   (a) GOVERNMENT FURNISHED? _____

   (b) CONTRACTOR FURNISHED? _____

3. IS INSTALLATION AND REMOVAL EQUIPMENT COMPATIBLE WITH TRANSPORTATION AND MAINTENANCE? _____

4. WHAT DEGREE OF ENGINE MAINTENANCE CAN BE PERFORMED WITHOUT SEPARATING THE ENGINES ENTIRELY FROM THE AIRPLANE AND AIRFRAME ATTACHED SUPPORT EQUIPMENT? _____

5. DOES THE C.G. CHANGE DURING ENGINE INSTALLATION AND REMOVAL REQUIRE THAT THE AIRPLANE BE SUPPORTED ON JACKS FOR THESE OPERATIONS? _____

6. IS ENGINE ACCESSIBLE FOR THE USE OF STANDARD TEST AND TRIM EQUIPMENT?

7. WILL OTHER THAN STANDARD EQUIPMENT BE REQUIRED FOR ENGINE TRIM? _____

8. IS POWERPLANT INSTALLATION AND CONFIGURATION COMPATIBLE WITH THE USE OF NOISE SUPPRESSION EQUIPMENT? _____

NOTE: ENGINE INSTALLATION AND REMOVAL MAY BE DEMONSTRATED ON THE LEFT ENGINE ONLY PROVIDED EQUIPMENT, CLEARANCES AND PROCEDURES ARE SYMMETRICAL. ASYMMETRIC CONDITIONS WITH RESPECT TO THE RIGHT ENGINE MAY BE MOCKED-UP SEPARATELY. CONTRACTOR FURNISHED EQUIPMENT FOR THIS DEMONSTRATION SHALL BE FURNISHED IN MOCKED-UP OR PROTOTYPE FORM WHICHEVER IS SUITABLE FOR THE PURPOSE.

P. MISCELLANEOUS

1. CAN BOARDING LADDER BE USED FOR MAINTENANCE? _____

2. ARE ATTACHMENTS PROVIDED WHERE REQUIRED? _____

3. IS HANDLING EQUIPMENT REQUIRED FOR SUCH HEAVY COMPONENTS AS RADOMES, ANTENNA, MODULATOR, ETC.? _____

4. ARE THESE COMPONENTS ACCESSIBLE FOR STANDARD HANDLING EQUIPMENT? _____

5. IS BORE-SIGHTING EQUIPMENT REQUIRED AND IF SO ARE ATTACHMENTS PROVIDED?

_____

6. ARE PROVISIONS MADE FOR ADAPTING A STANDARD ENGINE RUN-UP HOLDBACK?

_____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

P. MISCELLANEOUS (Cont)

7. WHAT PROVISIONS ARE MADE FOR REMOVING AND INSTALLING EJECTION SEATS? _____

8. MUST THE CANOPY BE REMOVED TO INSTALL AND REMOVE SEATS? _____

9. ARE ENGINE RUN UP SCREEN ATTACHMENTS PROVIDED? _____

10. ARE THE SCREENS DESIGNED FOR COMPACT STOWAGE? _____

11. ARE ATTACHMENTS PROVIDED FOR A RAM AIR TURBINE WIND TUNNEL? _____

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE NAVY
NAVAL AIR SYSTEMS COMMAND
WASHINGTON, D.C. 20360

APPENDIX 8

PHOTOGRAPHIC EQUIPMENT - AIRCRAFT MOCKUP INSPECTION CHECKOFF LIST

MODEL _____ AIRCRAFT

CONTRACT NO. _____/FY_____

This PHOTOGRAPHIC EQUIPMENT checkoff list consists of the following sections (cross out those sections listed below that are not applicable and omit from list):

A. GUN CAMERAS AND/OR GUNSIGHT CAMERAS (PAGE A-1)

B. VERTICAL CAMERAS (PAGE B-1)

C. OBLIQUE CAMERAS (PAGE C-1)

D. BOMB DAMAGE ASSESSMENT CAMERAS (PAGE D-1)

E. FORWARD FIRING CAMERAS (PAGE E-1)

F. VIEW FINDERS (PAGE F-1)

G. CAMERA CONTROL SYSTEM (G-1)

FSC 6910

Prepared by: _____

Date: _____

NOTE: The abbreviation "N.A." used herein denotes "Not applicable."

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

A. GUN CAMERAS/AND/OR GUNSIGHT CAMERAS

1. WHAT TYPE GUN CAMERA IS INSTALLED? _____

2. WHAT TYPE MOUNT IS INSTALLED? _____

3. WHERE IS GUN CAMERA LOCATED? _____

_____

(a) DOES THE LOCATION OF THE GUN CAMERA AFFORD AN UNOBSTRUCTED FIELD OF VIEW AT LEAST EQUAL TO THE LENS COVERAGE OF THE CAMERA ($8\frac{1}{2}^{\circ}$ FROM THE LENS AXIS, 17° TOTAL)? _____

(b) IS THE LOCATION SUCH THAT DURING NORMAL OPERATION OF THE AIRCRAFT, THE GUN CAMERA WILL BE FREE OF DIRT, OIL, FOREIGN MATTER, AND EXCESS HEAT? _____

(c) IS THE LOCATION SUCH THAT THE GUN CAMERA CAN BE READILY REMOVED, REPLACED, LOADED, SERVICED, AND BORESIGHTED? _____

4. WHAT PROVISION HAS BEEN MADE TO PREVENT EXCESSIVE VIBRATION OF THE GUN CAMERA DURING GUNFIRE? _____

_____

5. HOW IS CAMERA LENS PROTECTED? _____

_____

(a) IS SPACE PROVIDED FOR INSTALLATION OF A CAMERA LENS HEATER? _____

6. WHAT AUTOMATIC CONTROLS ARE PROVIDED? _____

_____

7. IN NIGHT FIGHTER AIRCRAFT, IS SPACE ALLOWED TO ACCOMMODATE THE NIGHT GUNNERY TRAINING LIGHT? _____

(a) IS THE NIGHT GUNNERY TRAINING LIGHT AS CLOSE TO THE CAMERA LENS AS POSSIBLE (WITHIN ONE INCH)? _____

8. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

B. VERTICAL CAMERAS

1. WHAT TYPE VERTICAL CAMERAS ARE INSTALLED? _____

2. WHAT TYPE MOUNTS ARE INSTALLED? _____

3. WHERE ARE VERTICAL CAMERAS LOCATED? _____

   (a) IS LOCATION SUCH THAT THE CAMERA EQUIPMENT CAN BE READILY REMOVED, REPLACED, LOADED, AND SERVICED? _____

   (b) IS MAGAZINE INSTALLATION AND REMOVAL PROVISION ADEQUATE? _____

4. WHAT VISION IS PROVIDED? _____

5. WHAT RANGE OF ANGLES IS REQUIRED? _____

6. IS INSTALLATION SATISFACTORY REGARDING EASE OF OPERATION? _____

7. ARE REMOTE CONTROLS SATISFACTORY? _____

8. ARE CAMERA LATCHES OR DOORS READILY OPENED IN FLIGHT? _____

9. ARE VACUUM CONNECTIONS READILY ACCESSIBLE TO CAMERA STATION? _____

10. ARE ELECTRICAL CONNECTIONS READILY ACCESSIBLE TO CAMERA STATION? _____

11. IS SUITABLE STOWAGE PROVIDED FOR REQUIRED ITEMS? _____

12. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

C. OBLIQUE CAMERAS

1. WHAT TYPES OF OBLIQUE CAMERAS ARE INSTALLED? _____

2. WHAT TYPES OF MOUNTS ARE INSTALLED? _____

3. WHERE ARE OBLIQUE CAMERAS LOCATED? _____

   (a) IS LOCATION SUCH THAT THE CAMERA EQUIPMENT CAN BE READILY REMOVED, REPLACED, LOADED, AND SERVICED? _____

   (b) IS MAGAZINE INSTALLATION AND REMOVAL PROVISION ADEQUATE? _____

4. WHAT VISION IS PROVIDED? _____

5. WHAT RANGE OF ANGLES IS REQUIRED? _____

6. IS INSTALLATION SATISFACTORY REGARDING EASE OF OPERATION? _____

7. ARE REMOTE CONTROLS SATISFACTORY? _____

8. ARE CAMERA LATCHES OR DOORS READILY OPENED IN FLIGHT? _____

9. ARE VACUUM CONNECTIONS READILY ACCESSIBLE TO CAMERA STATION? _____

10. ARE ELECTRICAL CONNECTIONS READILY ACCESSIBLE TO CAMERA STATION? _____

11. IS SUITABLE STOWAGE PROVIDED FOR REQUIRED ITEMS? _____

12. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

D. BOMB DAMAGE ASSESSMENT CAMERA

1. WHAT TYPE BOMB DAMAGE ASSESSMENT CAMERA IS INSTALLED? _____

_____

2. WHAT TYPE MOUNT IS INSTALLED? _____

3. WHERE IS BOMB DAMAGE ASSESSMENT CAMERA LOCATED? _____

   (a) IS LOCATION SUCH THAT THE CAMERA EQUIPMENT CAN BE READILY REMOVED, REPLACED, LOADED, AND SERVICED? _____

   (b) IS MAGAZINE INSTALLATION AND REMOVAL PROVISION ADEQUATE? _____

4. WHAT VISION IS PROVIDED? _____

5. WHAT RANGE OF ANGLES IS REQUIRED? _____

6. IS INSTALLATION SATISFACTORY REGARDING EASE OF OPERATION? _____

7. ARE REMOTE CONTROLS SATISFACTORY? _____

8. ARE CAMERA LATCHES OR DOORS READILY OPENED IN FLIGHT? _____

9. ARE VACUUM CONNECTIONS READILY ACCESSIBLE TO CAMERA STATION? _____

10. ARE ELECTRICAL CONNECTIONS READILY ACCESSIBLE TO CAMERA STATION? _____

11. IS SUITABLE STOWAGE PROVIDED FOR REQUIRED ITEMS? _____

12. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

E. FORWARD FIRING CAMERAS

1. WHAT TYPE FORWARD FIRING CAMERA IS INSTALLED? _____

   (a) WHAT OTHER TYPES CAN BE INSTALLED? _____

   _____

2. WHAT ARE CAMERA DEPRESSION ANGLES? _____

3. WHAT (IF ANY) VIGNETTING IS CAUSED BY CAMERA WINDOW? _____

4. IS CAMERA INSTALLATION AND REMOVAL PROVISION ADEQUATE? _____

5. IS MAGAZINE INSTALLATION AND REMOVAL PROVISION ADEQUATE? _____

6. DOES ACCESS DOOR FOR FORWARD FIRING CAMERA FAIL SAFE? _____

   (a) HAS PROVISION BEEN MADE FOR HOLDING OPEN THE DOOR FOR SERVICING?

   _____

7. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

F. VIEW FINDERS

1. WHAT TYPE VIEW FINDER IS INSTALLED? _____
2. DOES VIEW FINDER AFFORD ENOUGH PILOT HEAD MOVEMENT? _____
3. IS EYE POSITION SATISFACTORY? _____
4. ARE GRID LINES SATISFACTORY? _____
5. IS THERE ANY NOTICEABLE DISTORTION? _____
6. IS LIGHT TRANSMISSION ADEQUATE? _____
7. DO VIEW FINDER CONTROLS OPERATE PROPERLY? _____ _____
8. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

G. CAMERA CONTROL SYSTEM

1. ARE ALL CAMERA CONTROL SYSTEM COMPONENTS REQUIRING PREFLIGHT SETTING OF INPUT DATA READILY ACCESSIBLE TO GROUND CREW? _____

2. ARE ALL CAMERA CONTROL SYSTEM COMPONENTS REQUIRING INFLIGHT ADJUSTMENTS CONVENIENTLY LOCATED, READILY ACCESSIBLE AND OPERABLE BY THE CREW?

_____

3. DOES ANY PARAMETER OF THE CONTROL SYSTEM U/H RANGE, IMC RATES, ETC. COMPROMISE THE PHOTOGRAPHIC CAPABILITY AS RELATED TO CAMERA AND AIRCRAFT PERFORMANCE? _____

4. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE NAVY
NAVAL AIR SYSTEMS COMMAND
WASHINGTON, D.C. 20360

APPENDIX 9

LIGHTING SYSTEMS MOCKUP - AIRCRAFT MOCKUP INSPECTION CHECKOFF LIST

MODEL _____ . _____ AIRCRAFT

CONTRACT NO. _ ____ ____/FY _ ___

This LIGHTING SYSTEMS MOCKUP checkoff list consists of the following sections (cross out those sections listed below that are not applicable and omit from list):

A. COCKPIT (PILOT/CO-PILOT/NFO)
(PAGES A-1 TO A-2)

B. RADIO OPERATOR'S STATION
(PAGES B-1 TO B-2)

C. RADAR OPERATOR'S STATION
(PAGES C-1 TO C-2)

D. NAVIGATOR'S STATION
(PAGES D-1 TO D-2)

E. FLIGHT ENGINEER'S STATION
(PAGES E-1 TO E-2)

F. CIC OPERATOR'S STATION
(PAGES F-1 TO F-2)

G. EQUIPMENT COMPARTMENTS
(PAGE G-1)

H. PASSENGER COMPARTMENT
(PAGE H-1)

I. CARGO COMPARTMENT
(PAGE I-1)

J. EXTERIOR LIGHTING
(PAGE J-1)

FSC 6910

Prepared by: ___ . ____ . _____

Date: _____ . _____ __

NOTE: The abbreviation "N.A." used herein denotes "Not applicable."

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

A. COCKPIT (PILOT/CO-PILOT/NFO)

1. ARE ALL INSTRUMENTS ADEQUATELY ILLUMINATED? _____

   (a) ARE THEY ILLUMINATED UNIFORMLY? _____ IS THERE SUFFICIENT INTENSITY? _____

   (b) IS ILLUMINATION CONTROLLABLE TO VERY LOW INTENSITIES? _____

   (c) ARE MARKINGS OF INSTRUMENTS READABLE? _____

   (d) MAY LAMPS IN THE INSTRUMENT PANEL BE QUICKLY AND EASILY REPLACED IN FLIGHT? _____

2. ARE ALL CONTROLS, INSTRUCTIONS, AND NAMEPLATES ADEQUATELY ILLUMINATED?

   _____

   (a) ARE THEY ILLUMINATED UNIFORMLY? _____ IS THERE SUFFICIENT INTENSITY? _____

   (b) IS ILLUMINATION CONTROLLABLE TO VERY LOW INTENSITIES? _____

   (c) ARE MARKINGS ON CONTROLS, INSTRUCTIONS AND NAMEPLATES READABLE?

   _____

   (d) DO ALL ILLUMINATED PUSH-BUTTON SWITCHES MEET BRIGHTNESS REQUIREMENTS OF MIL-STD-411 FOR BOTH DAY AND NIGHT CONDITIONS? _____

3. IS THE INTENSITY OF LIGHTING FOR SOME INSTRUMENTS AND CONTROLS CONTROLLED SEPARATELY? _____ STATE. _____

4. IS FLOOD LIGHTING PROVIDED? _____ IS THE LIGHT NAVY RED? _____

   (a) IS THE POWER SOURCE INDEPENDENT OF NORMAL LIGHTING CIRCUIT? _____

5. ARE THERE ANY SOURCES OF LIGHT WHICH GIVE OTHER THAN NAVY RED LIGHT?

   _____

6. ARE THERE ANY REFLECTIONS IN THE WINDSHIELD, WINDOWS, CANOPY OR OTHER REFLECTING SURFACES WHICH INTERFERE WITH VISIBILITY INSIDE OR OUTSIDE THE COCKPIT? _____

   (e) IS THERE LIGHT LEAKAGE INTO THE COCKPIT FROM OTHER COMPARTMENTS?

   _____

7. ARE SPARE LAMPS PROVIDED IN SUFFICIENT QUANTITY AND EASILY ACCESSIBLE?

   _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

A. COCKPIT (PILOT/CO-PILOT/NFO) (Cont)

8. ARE ALL INSTRUMENTS, INSTRUCTIONS, NAMEPLATES, AND CONTROL MARKINGS READABLE IN DAYLIGHT? _____

9. IS HIGH INTENSITY WHITE LIGHT PROVIDED FOR HIGH ALTITUDE OPERATIONS?

_____

10. ARE PROVISIONS MADE FOR DIMMING ALL WARNING AND CAUTION LIGHTS? _____

(a) CAN LIGHTS BE DIMMED SUFFICIENTLY FOR NIGHT OPERATIONS? _____

(b) ARE WARNING AND CAUTION LIGHTS OF SUFFICIENT INTENSITY FOR DAYLIGHT USE? _____

(c) LIST WARNING AND CAUTION LIGHTS NOT ON THE DIMMING CIRCUIT? _____

_____

11. IS INDEPENDENT LIGHTING PROVIDED FOR ANGLE OF ATTACK INDEXER? _____

(a) DOES INDEXER HAVE SEPARATE LIGHTING CONTROL? _____

(b) IS INTENSITY CONTINUOUSLY VARIABLE? _____

(c) IS SUFFICIENT RANGE OF INTENSITIES PROVIDED FOR BOTH DAY AND NIGHT?

_____

(d) IS COLOR SPECIFIED NAVY RED? _____

12. IS INDEPENDENT LIGHTING PROVIDED FOR STANDBY COMPASS? _____

(a) DOES LIGHTING CONTROL HAVE THREE POSITIONS, OFF, DIM, BRIGHT? _____

(b) IS LIGHTING UNIFORM? _____

(c) IS COLOR SPECIFIED NAVY RED? _____

13. IS CHART PLOTTING BOARD ADEQUATELY ILLUMINATED? _____

14. IS LIGHTING PROVIDED IN ACCORDANCE WITH THE AIRCRAFT DETAIL SPECIFICATION? _____

15. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

B. RADIO OPERATOR'S STATION

1. ARE ALL INSTRUMENTS ADEQUATELY ILLUMINATED? _____

   (a) ARE THEY ILLUMINATED UNIFORMLY? _____ IS THERE SUFFICIENT INTENSITY? _____

   (b) IS ILLUMINATION CONTROLLABLE TO VERY LOW INTENSITIES? _____

   (c) ARE MARKINGS ON INSTRUMENTS READABLE? _____

   (d) MAY LAMPS IN THE INSTRUMENT PANEL BE QUICKLY AND EASILY REPLACED IN FLIGHT? _____

2. ARE ALL CONTROLS, INSTRUCTIONS, AND NAMEPLATES ADEQUATELY ILLUMINATED?

   _____

   (a) ARE THEY ILLUMINATED UNIFORMLY? _____ IS THERE SUFFICIENT INTENSITY? _____

   (b) IS ILLUMINATION CONTROLLABLE TO VERY LOW INTENSITIES? _____

   (c) ARE MARKINGS ON CONTROLS, INSTRUCTIONS AND NAMEPLATES READABLE?

   _____ _____

   (d) DO ALL ILLUMINATED PUSH-BUTTON SWITCHES MEET BRIGHTNESS REQUIREMENTS OF MIL-STD-411 FOR BOTH DAY AND NIGHT CONDITIONS? _____

3. IS THE INTENSITY OF LIGHTING FOR SOME INSTRUMENTS AND CONTROLS CONTROLLED SEPARATELY? _____ STATE _____

4. IS FLOOD LIGHTING PROVIDED? _____ IS THE LIGHT NAVY RED? _____

   (a) IS THE POWER SOURCE INDEPENDENT OF NORMAL LIGHTING CIRCUIT? _____

5. ARE THERE ANY SOURCES OF LIGHT WHICH GIVE OTHER THAN NAVY RED LIGHT?

   _____

6. ARE THERE ANY REFLECTIONS IN WINDOWS, OR OTHER REFLECTING SURFACES WHICH INTERFERE WITH VISIBILITY INSIDE OR OUTSIDE THE COMPARTMENT? _____

   (a) IS THERE LIGHT LEAKAGE INTO THE COMPARTMENT FROM OTHER COMPARTMENTS?

   _____

7. ARE SPARE LAMPS PROVIDED IN SUFFICIENT QUANTITY AND EASILY ACCESSIBLE?

   _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

B. RADIO OPERATOR'S STATION (Cont)

8. ARE ALL INSTRUMENTS, INSTRUCTIONS, NAMEPLATES, AND CONTROL MARKINGS READABLE IN DAYLIGHT? _____

9. IS HIGH INTENSITY WHITE LIGHT PROVIDED FOR HIGH ALTITUDE OPERATIONS?

_____

10. ARE PROVISIONS MADE FOR DIMMING ALL WARNING AND CAUTION LIGHT? _____

(a) CAN LIGHTS BE DIMMED SUFFICIENTLY FOR NIGHT OPERATIONS? _____

(b) ARE WARNING AND CAUTION LIGHTS OF SUFFICIENT INTENSITY FOR DAYLIGHT USE? _____

(c) LIST WARNING AND CAUTION LIGHTS NOT ON THE DIMMING CIRCUIT? _____

_____

11. IS LIGHTING PROVIDED IN ACCORDANCE WITH THE AIRCRAFT DETAIL SPECIFICATION? _____

12. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

C. RADAR OPERATOR'S STATION

1. ARE ALL INSTRUMENTS ADEQUATELY ILLUMINATED? _____

   (a) ARE THEY ILLUMINATED UNIFORMLY? _____ IS THERE SUFFICIENT INTENSITY? _____ _____

   (b) IS ILLUMINATION CONTROLLABLE TO VERY LOW INTENSITIES? _____

   (c) ARE MARKINGS ON INSTRUMENTS READABLE? _____

   (d) MAY LAMPS IN THE INSTRUMENT PANEL BE QUICKLY AND EASILY REPLACED IN FLIGHT? _____

2. ARE ALL CONTROLS, INSTRUCTIONS, AND NAMEPLATES ADEQUATELY ILLUMINATED?

   (a) ARE THEY ILLUMINATED UNIFORMLY? _____ IS THERE SUFFICIENT INTENSITY? _____

   (b) IS ILLUMINATION CONTROLLABLE TO VERY LOW INTENSITIES? _____

   (c) ARE MARKINGS ON CONTROLS, INSTRUCTIONS AND NAMEPLATES READABLE? _____

   (d) DO ALL ILLUMINATED PUSH-BUTTON SWITCHES MEET BRIGHTNESS REQUIREMENTS OF MIL-STD-411 FOR BOTH DAY AND NIGHT CONDITIONS? _____

3. IS THE INTENSITY OF LIGHTING FOR SOME INSTRUMENTS AND CONTROLS CONTROLLED SEPARATELY? _____ STATE _____

4. IS FLOOD LIGHTING PROVIDED? _____ IS THE LIGHT NAVY RED? _____

   (a) IS THE POWER SOURCE INDEPENDENT OF NORMAL LIGHTING CIRCUIT? _____

5. ARE THERE ANY SOURCES OF LIGHT WHICH GIVE OTHER THAN NAVY RED LIGHT?

6. ARE THERE ANY REFLECTIONS IN WINDOWS OR OTHER REFLECTING SURFACES WHICH INTERFERE WITH VISIBILITY INSIDE OR OUTSIDE THE COMPARTMENT? _____

   (a) IS THERE LIGHT LEAKAGE INTO THE COMPARTMENT FROM OTHER COMPARTMENTS?

7. ARE SPARE LAMPS PROVIDED IN SUFFICIENT QUANTITY AND EASILY ACCESSIBLE?

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

C. RADAR OPERATOR'S STATION (Cont)

8. ARE ALL INSTRUMENTS, INSTRUCTIONS, NAMEPLATES, AND CONTROL MARKINGS READABLE IN DAYLIGHT? _____

9. IS HIGH INTENSITY WHITE LIGHT PROVIDED FOR HIGH ALTITUDE OPERATIONS?

_____

10. ARE PROVISIONS MADE FOR DIMMING ALL WARNING AND CAUTION LIGHTS? _____

(a) CAN LIGHTS BE DIMMED SUFFICIENTLY FOR NIGHT OPERATIONS? _____

(b) ARE WARNING AND CAUTION LIGHTS OF SUFFICIENT INTENSITY FOR DAYLIGHT USE? _____

(c) LIST WARNING AND CAUTION LIGHTS NOT ON THE DIMMING CIRCUIT? _____

_____

11. IS LIGHTING PROVIDED IN ACCORDANCE WITH THE AIRCRAFT DETAIL SPECIFICATION? _____

12. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

D. NAVIGATOR'S STATION

1. ARE ALL INSTRUMENTS ADEQUATELY ILLUMINATED? _____

   (a) ARE THEY ILLUMINATED UNIFORMLY? _____ IS THERE SUFFICIENT INTENSITY? _____

   (b) IS ILLUMINATION CONTROLLABLE TO VERY LOW INTENSITIES? _____

   (c) ARE MARKINGS ON INSTRUMENTS READABLE? _____

   (d) MAY LAMPS IN THE INSTRUMENT PANEL BE QUICKLY AND EASILY REPLACED IN FLIGHT? _____

2. ARE ALL CONTROLS, INSTRUCTIONS, AND NAMEPLATES ADEQUATELY ILLUMINATED?

   _____

   (a) ARE THEY ILLUMINATED UNIFORMLY? _____ IS THERE SUFFICIENT INTENSITY? _____

   (b) IS ILLUMINATION CONTROLLABLE TO VERY LOW INTENSITIES? _____

   (c) ARE MARKINGS ON CONTROLS, INSTRUCTIONS AND NAMEPLATES READABLE?

   _____

   (d) DO ALL ILLUMINATED PUSH-BUTTON SWITCHES MEET BRIGHTNESS REQUIREMENTS OF MIL-STD-411 FOR BOTH DAY AND NIGHT CONDITIONS? _____

3. IS THE INTENSITY OF LIGHTING FOR SOME INSTRUMENTS AND CONTROLS CONTROLLED SEPARATELY? _____ STATE _____

4. IS FLOOD LIGHTING PROVIDED? _____ IS THE LIGHT NAVY RED? _____

   (a) IS THE POWER SOURCE INDEPENDENT OF NORMAL LIGHTING CIRCUIT? _____

5. ARE THERE ANY SOURCES OF LIGHT WHICH GIVE OTHER THAN NAVY RED LIGHT?

   _____

6. ARE THERE ANY REFLECTIONS IN WINDOWS OR OTHER REFLECTING SURFACES WHICH INTERFERE WITH VISIBILITY INSIDE OR OUTSIDE THE COMPARTMENT? _____

   (a) IS THERE LIGHT LEAKAGE INTO THE COMPARTMENT FROM OTHER COMPARTMENTS?

   _____

7. ARE SPARE LAMPS PROVIDED IN SUFFICIENT QUANTITY AND EASILY ACCESSIBLE?

   _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

D. NAVIGATOR'S STATION (Cont)

8. ARE ALL INSTRUMENTS, INSTRUCTIONS, NAMEPLATES, AND CONTROL MARKINGS READABLE IN DAYLIGHT? _____

9. IS HIGH INTENSITY WHITE LIGHT PROVIDED FOR HIGH ALTITUDE OPERATIONS?

_____

10. ARE PROVISIONS MADE FOR DIMMING ALL WARNING AND CAUTION LIGHTS? _____

(a) CAN LIGHTS BE DIMMED SUFFICIENTLY FOR NIGHT OPERATIONS? _____

(b) ARE WARNING AND CAUTION LIGHTS OF SUFFICIENT INTENSITY FOR DAYLIGHT USE? _____

(c) LIST WARNING AND CAUTION LIGHTS NOT ON THE DIMMING CIRCUIT? _____

_____

11. IS CHART PLOTTING BOARD AND NAVIGATOR'S TABLE ADEQUATELY ILLUMINATED?

_____

12. IS LIGHTING PROVIDED IN ACCORDANCE WITH THE AIRCRAFT DETAIL SPECIFICATION? _____

13. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

E. FLIGHT ENGINEER'S STATION

1. ARE ALL INSTRUMENTS ADEQUATELY ILLUMINATED? _____

   (a) ARE THEY ILLUMINATED UNIFORMLY? _____ IS THERE SUFFICIENT INTENSITY? _____

   (b) IS ILLUMINATION CONTROLLABLE TO VERY LOW INTENSITIES? _____

   (c) ARE MARKINGS ON INSTRUMENTS READABLE? _____

   (d) MAY LAMPS IN THE INSTRUMENT PANEL BE QUICKLY AND EASILY REPLACED IN FLIGHT? _____

2. ARE ALL CONTROLS, INSTRUCTIONS, AND NAMEPLATES ADEQUATELY ILLUMINATED?

   _____

   (a) ARE THEY ILLUMINATED UNIFORMLY? _____ IS THERE SUFFICIENT INTENSITY? _____

   (b) IS ILLUMINATION CONTROLLABLE TO VERY LOW INTENSITIES? _____

   (c) ARE MARKINGS ON CONTROLS, INSTRUCTIONS AND NAMEPLATES READABLE? _____

   (d) DO ALL ILLUMINATED PUSH-BUTTON SWITCHES MEET BRIGHTNESS REQUIREMENTS OF MIL-STD-411 FOR BOTH DAY AND NIGHT CONDITIONS? _____

3. IS THE INTENSITY OF LIGHTING FOR SOME INSTRUMENTS AND CONTROLS CONTROLLED SEPARATELY? _____ STATE _____

4. IS FLOOD LIGHTING PROVIDED? _____ IS THE LIGHT NAVY RED? _____

   (a) IS THE POWER SOURCE INDEPENDENT OF NORMAL LIGHTING CIRCUIT? _____

5. ARE THERE ANY SOURCES OF LIGHT WHICH GIVE OTHER THAN NAVY RED LIGHT?

   _____

6. ARE THERE ANY REFLECTIONS IN WINDOWS OR OTHER REFLECTING SURFACES WHICH INTERFERE WITH VISIBILITY INSIDE OR OUTSIDE THE COMPARTMENT? _____

   (a) IS THERE LIGHT LEAKAGE INTO THE COMPARTMENT FROM OTHER COMPARTMENTS?

   _____

7. ARE SPARE LAMPS PROVIDED IN SUFFICIENT QUANTITY AND EASILY ACCESSIBLE?

   _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

E. FLIGHT ENGINEER'S STATION (Cont)

8. ARE ALL INSTRUMENTS, INSTRUCTIONS, NAMEPLATES, AND CONTROL MARKINGS READABLE IN DAYLIGHT? _____

9. IS HIGH INTENSITY WHITE LIGHT PROVIDED FOR HIGH ALTITUDE OPERATIONS?

_____

10. ARE PROVISIONS MADE FOR DIMMING ALL WARNING AND CAUTION LIGHTS? _____

(a) CAN LIGHTS BE DIMMED SUFFICIENTLY FOR NIGHT OPERATIONS? _____

(b) ARE WARNING AND CAUTION LIGHTS OF SUFFICIENT INTENSITY FOR DAYLIGHT USE? _____

(c) LIST WARNING AND CAUTION LIGHTS NOT ON THE DIMMING CIRCUIT? _____

_____

11. IS LIGHTING PROVIDED IN ACCORDANCE WITH THE AIRCRAFT DETAIL SPECIFICATION? _____

12. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

F. CIC OPERATOR'S STATION

1. ARE ALL INSTRUMENTS ADEQUATELY ILLUMINATED? ___ _____

   (a) ARE THEY ILLUMINATED UNIFORMLY? _____ IS THERE SUFFICIENT INTENSITY? _____

   (b) IS ILLUMINATION CONTROLLABLE TO VERY LOW INTENSITIES? _____

   (c) ARE MARKINGS ON INSTRUMENTS READABLE? _____

   (d) MAY LAMPS IN THE INSTRUMENT PANEL BE QUICKLY AND EASILY REPLACED IN FLIGHT? _____

2. ARE ALL CONTROLS, INSTRUCTIONS, AND NAMEPLATES ADEQUATELY ILLUMINATED?

   _____

   (a) ARE THEY ILLUMINATED UNIFORMLY? _____ IS THERE SUFFICIENT INTENSITY? _____

   (b) IS ILLUMINATION CONTROLLABLE TO VERY LOW INTENSITIES? _____

   (c) ARE MARKINGS ON CONTROLS, INSTRUCTIONS AND NAMEPLATES READABLE? _____

   (d) DO ALL ILLUMINATED PUSH-BUTTON SWITCHES MEET BRIGHTNESS REQUIREMENTS OF MIL-STD-411 FOR BOTH DAY AND NIGHT CONDITIONS? _____

3. IS THE INTENSITY OF LIGHTING FOR SOME INSTRUMENTS AND CONTROLS CONTROLLED SEPARATELY? _____ STATE _____

4. IS FLOOD LIGHTING PROVIDED? _____ IS THE LIGHT NAVY RED? _____

   (a) IS THE POWER SOURCE INDEPENDENT OF NORMAL LIGHTING CIRCUIT? _____

5. ARE THERE ANY SOURCES OF LIGHT WHICH GIVE OTHER THAN NAVY RED LIGHT?

   _____

6. ARE THERE ANY REFLECTIONS IN WINDOWS OR OTHER REFLECTING SURFACES WHICH INTERFERE WITH VISIBILITY INSIDE OR OUTSIDE THE COMPARTMENT? _____

   (a) IS THERE LIGHT LEAKAGE INTO THE COMPARTMENT FROM OTHER COMPARTMENTS?

   _____

7. ARE SPARE LAMPS PROVIDED IN SUFFICIENT QUANTITY AND EASILY ACCESSIBLE?

   _____

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.

F. CIC OPERATOR'S STATION (Cont)

8. ARE ALL INSTRUMENTS, INSTRUCTIONS, NAMEPLATES, AND CONTROL MARKINGS READABLE IN DAYLIGHT? _____

9. IS HIGH INTENSITY WHITE LIGHT PROVIDED FOR HIGH ALTITUDE OPERATIONS?

_____

10. ARE PROVISIONS MADE FOR DIMMING ALL WARMING AND CAUTION LIGHTS? _____

(a) CAN LIGHTS BE DIMMED SUFFICIENTLY FOR NIGHT OPERATIONS? _____

(b) ARE WARNING AND CAUTION LIGHTS OF SUFFICIENT INTENSITY FOR DAYLIGHT USE? _____

(c) LIST WARNING AND CAUTION LIGHTS NOT ON THE DIMMING CIRCUIT? _____

_____

11. IS LIGHTING PROVIDED IN ACCORDANCE WITH THE AIRCRAFT DETAIL SPECIFICATION? _____

12. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

G. EQUIPMENT COMPARTMENTS

1. ARE ALL CONTROLS, INSTRUCTIONS, AND WARNING PLATES ADEQUATELY ILLUMINATED? _____

2. ARE INTENSITIES OF LIGHTED AREAS IN ACCORDANCE WITH THE AIRCRAFT DETAIL SPECIFICATION? _____

3. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

H. PASSENGER COMPARTMENT

1. IS THERE A SEPARATE READING LIGHT FOR EACH SEAT OR BERTH? _____

   (a) IS THE LIGHT ADEQUATE FOR READING? _____

   (b) DOES THE LIGHT CAUSE GLARE TO ADJACENT PASSENGERS? _____

2. IS THERE ADEQUATE GENERAL ILLUMINATION FOR THE COMPARTMENT? _____

   (a) IS THIS LIGHT A SOURCE OF GLARE WHILE SITTING IN A SEAT OR WHILE WALKING ALONG THE AISLE? _____

3. IS THERE ADEQUATE EMERGENCY EXIT LIGHTING? _____

   (a) IS THE EMERGENCY EXIT LIGHTING CRASH-OPERATED? _____

4. IS THERE ADEQUATE NIGHT LIGHTING FOR THE AISLE WHEN PASSENGERS ARE SLEEPING? _____

5. IS THERE ADEQUATE LIGHTING FOR THE GALLEY? _____

6. CAN THE "NO SMOKING" AND "FASTEN SEAT BELT" SIGNS BE SEEN FROM ALL SEATS WHEN LIGHTED? _____

7. IS THERE SUFFICIENT LIGHTING FOR THE WASHROOMS? _____

8. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:44Z
Check the source to verify that this is the current version before use.

I. CARGO COMPARTMENT

1. IS ADEQUATE ILLUMINATION PROVIDED TO READILY PERMIT LOADING AND UNLOADING OF CARGO AND PERFORMING TIEDOWN OPERATIONS AT NIGHT? _____

2. WILL A FULLY LOADED COMPARTMENT INTERFERE WITH THE ILLUMINATION?

_____

3. REMARKS. -

Checked by: _____

Date: _____

Source: https://assist.dla.mil -- Downloaded: 202640-17T10:44Z
Check the source to verify that this is the current version before use.

J. EXTERIOR LIGHTING

1. DO ANY OF THE EXTERIOR LIGHTS PROVIDE GLARE IN THE COCKPIT? _____

2. ARE THE POSITION LIGHTS AND APPROACH LIGHTS VISIBLE TO THE LANDING SIGNAL OFFICER? _____

3. IS EXTERIOR LIGHTING PROVIDED IN ACCORDANCE WITH THE AIRCRAFT DETAIL SPECIFICATION? _____

4. REMARKS. -

Checked by: _____

Date: _____

☆U.S. GOVERNMENT PRINTING OFFICE: 1980 — 603-121/3984

Source: https://assist.dla.mil -- Downloaded: 202610-17T10:44Z
Check the source to verify that this is the current version before use.