MIL-C-39029/18C(AS)
25 April 1980
SUPERSEDING
MIL-C-39029/18B(AS)
2 August 1976


MILITARY SPECIFICATION SHEET

CONTACTS, ELECTRICAL CONNECTOR, PIN, CRIMP REMOVABLE, (FOR MIL-C-81511 SERIES 3 AND 4 CONNECTORS)


This specification is approved for use by Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the contacts described herein shall consist of this document and the latest issue of Specification MIL-C-39029


INACTIVE FOR NEW DESIGN

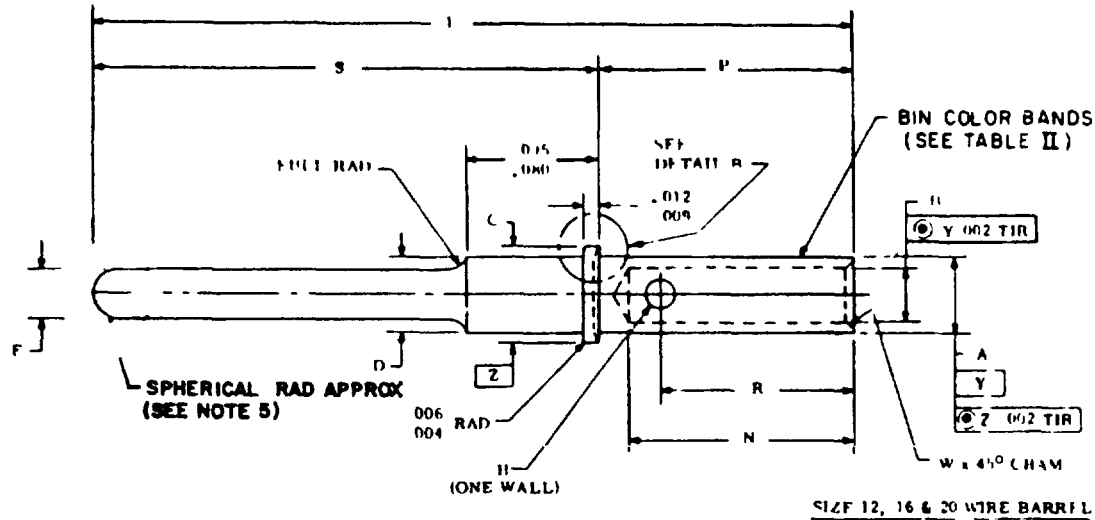


SIZE 12, 16 & 20 WIRE BARREL

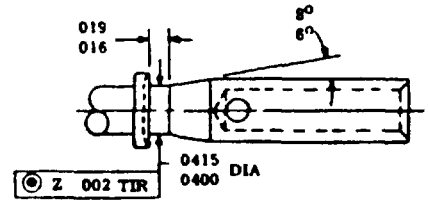

SIZE 22 WIRE BARREL



DETAIL B

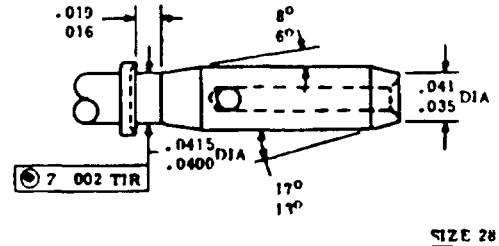

SIZE 28 WIRE BARREL

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Metric equivalents are in parentheses for overall length and diameter only.
4. Dimensions shown apply after plating.
5. Spherical end dimension shall conform to MIL-C-39029 .

FSC 5935

© denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:31Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions.

BIN code	A DIA	B DIA	C DIA	D DIA	E DIA	H DIA	L (REF)	N	P	R	S	U	W CHAM
176	.0480	.0200	.0555 (1.41)	.0390	.0275	.022	.636 (16.15)	.155	.218	.145	.426	.022	.006
	.0465	.0180	.0540 (1.37)	.0365	.0260	.018		.145	.208	.139	.420	.015	.003
177	.0480	.0355	.0555 (1.41)	.0390	.0275	.022	.636 (16.15)	.155	.218	.145	.426	.022	.006
	.0465	.0335	.0540 (1.37)	.0365	.0260	.018		.145	.208	.139	.420	.015	.003
178	.0615	.0450	.0760 (1 93)	.0615	.0410	.027	.636 (16.15)	.195	.218	.165	.426	.026	.007
	.0600	.0430	0745 (1 89)	.0600	.0390	.023		.185	.208	.159	.420	.018	.004
179	.0925	.0645	1080 (2.74)	.0925	.0630	.027	.636 (16.15)	.195	.218	.165	.426	.026	.010
	.0910	.0625	.1065 (2.71)	.0910	.0610	.023		.185	.208	.159	.420	.018	.006
180	.1515	.1020	.1695 (4.31)	.1515	.0950	.042	.663 (16.84)	.232	.245	.196	.426	.026	.012
	.1500	.0980	.1680 (4.27)	.1500	.0930	.038		.216	.235	.190	.420	.018	.006

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:31Z
Check the source to verify that this is the current version before use.

TABLE II Design characteristics

BIN code	Color bands			Mating end size	Wire barrel size	Type	Class
	1st	2nd	3rd				
176	Brown	Violet	Blue	23	28	A	B
177	Brown	Violet	Violet	23	22		
178	Brown	Violet	Gray	20	20		
179	Brown	Violet	White	16	16		
180	Brown	Gray	Black	12	12		

(C)

TABLE III Tools

BIN code	Basic crimping tool	Positioner	Installing tool	Removal tool	
				Wired contact	Unwired contact
176	M22520/2-01	M22520/2-13	M81969/16-04	M81969/16-04	M81969/30-01
177	M22520/2-01	M22520/2-13	M81969/16-04	M81969/16-04	M81969/30-01
178	M22520/2-01 M22520/7-01	M22520/2-14 M22520/7-02	M81969/16-01	M81969/16-01	M81969/30-02
179	M22520/2-01 M22520/7-01	M22520/2-15 M22520/7-03	M81969/16-02	M81969/16-02	M81969/30-03
180	M22520/1-01	M22520-1-09	M81969/16-03	M81969/16-03	M81969/30-04

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:31Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions, design characteristics, and configuration See figure and tables I and II.

Tools See table III

(C) Vibration Method 2005 of MIL-STD-1344, test condition IV

(C) Shock (specified pulse) Method 2004 of MIL-STD-1344, test condition A

Mating contact MIL-C-39029/16 and /17.

QPL evaluating activity Naval Avionics Center, Code D-914, Indianapolis, Indiana 46218

Military part numbers See table IV

(C) TABLE IV. Military part number

BIN code	Military part number	Supersedes
176	M39029/18-176	M39029/18-23-28
177	M39029/18-177	M39029/18-23-22
178	M39029/18-178	M39029/18-20-20
179	M39029/18-179	M39029/18-16-16
180	M39029/18-180	M39029/18-12-12

Custodians
Navy - AS

Review activities
Navy - EC, SH, MC
DLA - ES

User activities
Navy - OS

Preparing activity
Navy - AS

Agent
DLA - ES

(Project 5935-N109-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:31Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316

U.S. MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Engineering Specifications & Standards Department
Naval Air Engineering Center
Lakehurst, N. J 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:31Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-C39029/18C Contact. Electrical Connector. Pin. Crimp Removable

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID RESTRICTIVE LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426 Replaces edition of 1 Jan 72 which may be used S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:31Z
Check the source to verify that this is the current version before use.