MILITARY STANDARD

TRUCKLOADING


ROCKET MOTOR MK 45
IN CONTAINER OS 11130


MIL-STD-1320-204 (NAVY)

20 MARCH 1981

CONTAINER DATA

DIMENSIONS:	ROUND TOP	SQUARE TOP
LENGTH	163 1/2	163 1/4
WIDTH	35 3/4	34 3/4
HEIGHT	42 3/4	43 3/4
GROSS WEIGHT (APPROX.)	4700 LBS	4700 LBS
CUBE	144.6 CU FT	143.6 CU FT
DOT HAZARD CLASSIFICATION	EXPLOSIVES B	

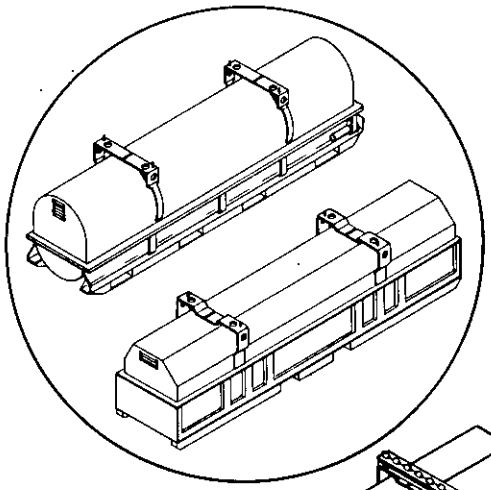

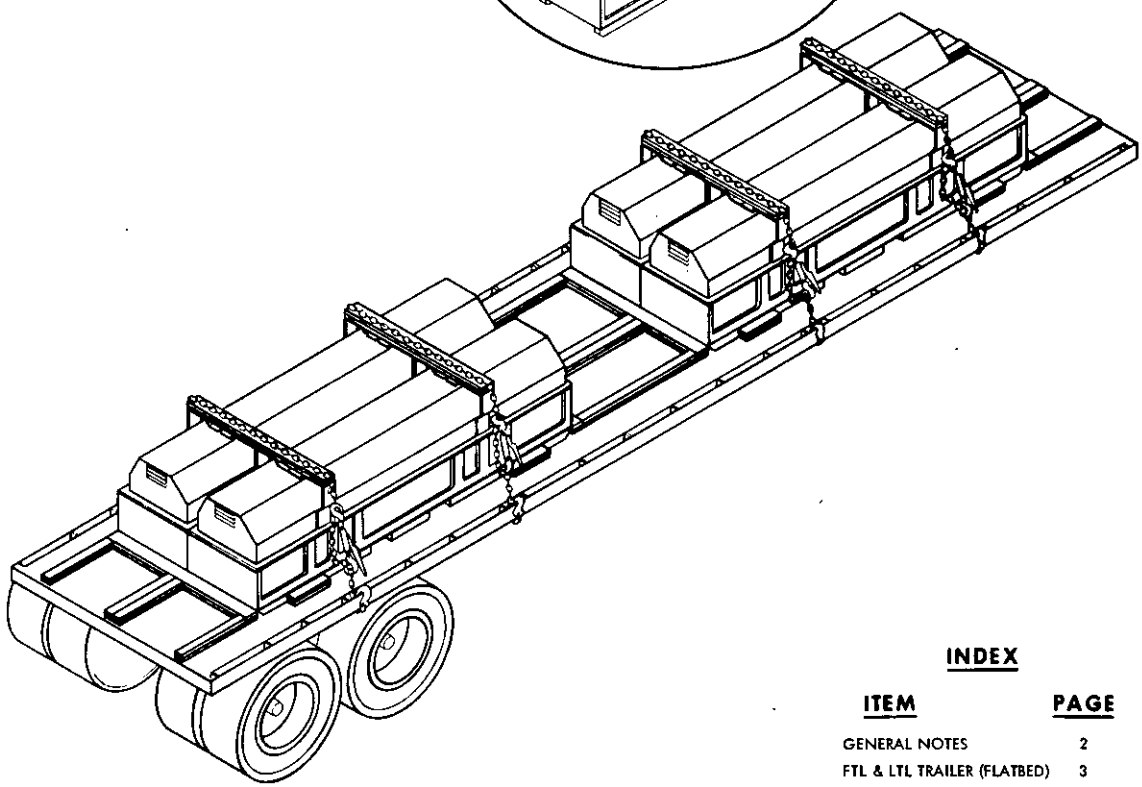

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL & LTL TRAILER (FLATBED)	3

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS REFER TO INDEX TO STANDARDS, MIL-HDBK-236.

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENTS ONLY

M.S. Gray NWHC — 3/18/81
TECHNICAL DIRECTION AGENT (TDA) — DATE

J.E. Kelly — 3/18/81
SEASYSCOM BY DIRECTION — DATE

ORIGINATOR Wm Caden — 18 MARCH 81 DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

☆ U.S. GOVERNMENT PRINTING OFFICE: 1981—703-023/1771


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT PROVIDES DETAILED INSTRUCTIONS FOR TRUCKLOADING THE MK 45 ROCKET MOTOR FOR THE SUBROC MISSILE WHEN THE ROCKET MOTOR IS IN THE CONTAINER MANUFACTURED IN ACCORDANCE WITH OS 11130.
2. THERE ARE TWO DESIGNS OF CONTAINERS:
   (a) THE "SQUARE" TOP CONTAINER MANUFACTURED BY THE CONTAINER RESEARCH CORPORATION.
   (b) THE "ROUND" TOP CONTAINER MANUFACTURED BY THE CHAMPION COMPANY.
   BOTH DESIGNS MAY BE TRUCKLOADED USING THIS DOCUMENT.
3. THE PROCEDURES AND PRACTICES DESCRIBED HEREIN ARE INTENDED FOR FLATBED TRAILERS. THE TRAILER AXLES SHALL BE LOCATED IN THE "WESTERN" POSITION (AT THE EXTREME REAR OF THE TRAILER). *DO NOT USE TRAILERS WITH NON-NAILABLE FLOORS. "DOUBLES" WHEN PERMITTED BY STATE LAW* MAY BE USED PROVIDED THE PRINCIPLES OF THIS DOCUMENT ARE FOLLOWED.
4. CHAINS AND STEEL STRAPS MAY BE USED INTERCHANGEABLY ON A ONE TO ONE BASIS FOR TIE DOWNS.
5. CHAINS, FITTINGS AND LOAD BINDERS SHALL MEET THE REQUIREMENTS OF THE BASIC TRUCKLOADING DOCUMENT MIL-STD-1320 AND AS SHOWN ON PAGE 3 OF THIS DOCUMENT.
6. STEEL STRAP USED AS TIE DOWNS SHALL BE 2 X .050 AND SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE BASIC TRUCKLOADING DOCUMENT MIL-STD-1320.
7. PRIOR TO LOADING THE TRAILER AND DURING THE PRELOADING INSPECTION REQUIRED BY NAVORD OP 2165 AND REPORTED ON DD FORM 626, THE CHAINS, FITTINGS AND LOAD BINDERS SHALL BE INSPECTED FOR STRETCH, GOUGING, BENT LINKS, WEAR AND ANY OTHER NOTICEABLE DEFECTS. THE INSPECTOR SHALL CONFIRM THAT THE CHAINS AND LOAD BINDERS HAVE BEEN INSPECTED AND SHALL SO NOTE IN ITEM NO. 22 OF DD FORM 626. ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A CHAIN OR LOAD BINDER.
8. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS, AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
9. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS TO AN ACCESSIBLE AREA AND ATTACH "EXPLOSIVES B" PLACARD TO BOTH SIDES, FRONT AND BACK OF TRAILER.
10. UNLESS OTHERWISE SPECIFIED ALL MATERIAL SHALL BE AS SPECIFIED IN THE GENERAL DOCUMENT MIL-STD-1320.
11. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT MILITARY STANDARD 1320.


FTL & LTL 40 FT TRAILER (FLATBED)

1. A FULL TRUCKLOAD CONSISTS OF FOUR CONTAINERS.
2. WHEN LOADING "SQUARE" TOP CONTAINERS, BLOCK AND TIE DOWN AS SHOWN ON PAGE 3.
3. *WHEN LOADING "ROUND" TOP CONTAINERS, SUBSTITUTE KNEE BRACES, DETAIL A, FOR THE END AND CENTER FLOOR BLOCKING, PIECE NUMBERS 1, 2, 3 & 4.* TWO KNEE BRACES SHALL BE USED AT EACH END OF EACH CONTAINER (FOUR KNEE BRACES PER CONTAINER). USE SLEEPERS AND TIE DOWNS AS SHOWN ON PAGE 3.
4. WHEN REQUIRED TO SHIP LESS THAN FTL, USE THE PRINCIPLES SPECIFIED IN THIS DOCUMENT.

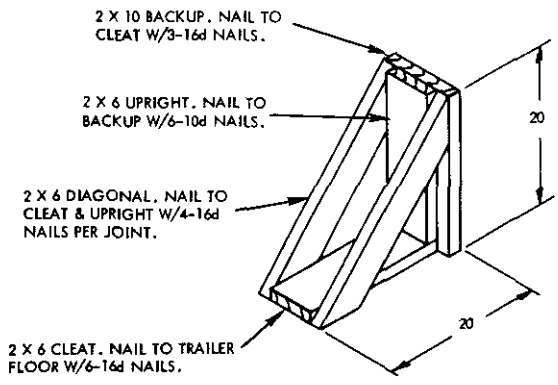


DETAIL A

KNEE BRACE

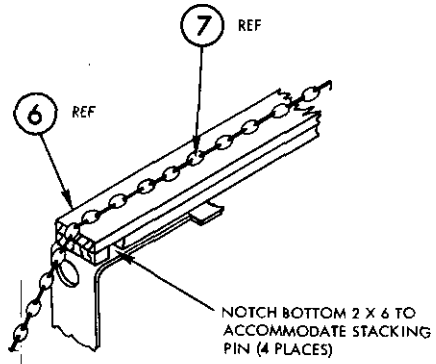


DETAIL B

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.

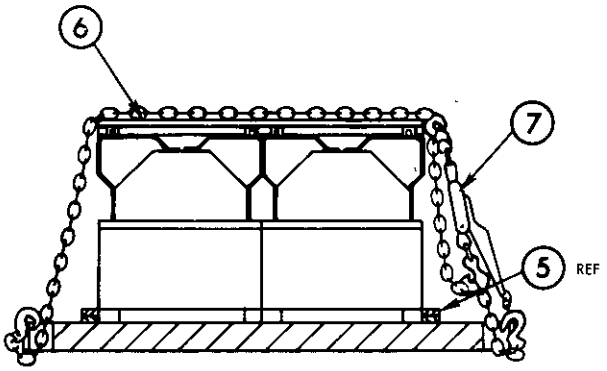

SECTION C-C

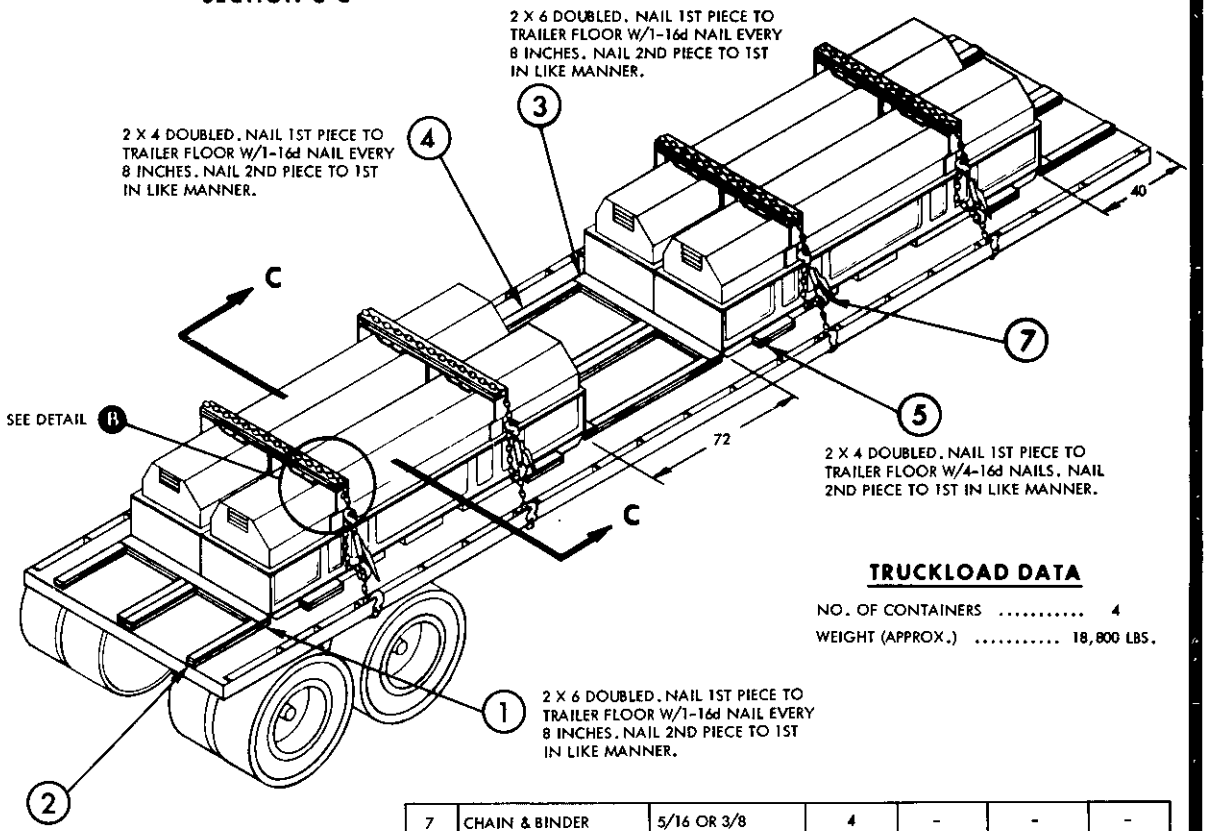

TRUCKLOAD DATA

NO. OF CONTAINERS 4
WEIGHT (APPROX.) ..... 18,800 LBS.

PIECE NO.	DESCRIPTION	SIZE	NO. OF PCS. REQ'D	NAIL TO	NAILS NUMBER	NAILS SIZE
7	CHAIN & BINDER	5/16 OR 3/8	4	-	-	-
6	PROTECTOR BOARD	2 X 6 X 68	8	DBLD LAMINATED	6	10d
5	SLEEPER	2 X 4 X 18	16	SEE FIELD NOTE		
4	SPACER CLEAT	2 X 4 X TO SUIT	8	SEE FIELD NOTE		
3	CENTER CROSSMEMBER	2 X 6 X 72	4	SEE FIELD NOTE		
2	BACKUP CLEAT	2 X 4 X 30	16	SEE FIELD NOTE		
1	END CROSSMEMBER	2 X 6 X 72	4	SEE FIELD NOTE		

LIST OF MATERIALS & NAILING DATA

FTL & LTL TRAILER (FLATBED)

REVIEW ACTIVITY:
NAVY - OS

PREPARING ACTIVITY:
NAVY - OS
(PROJECT NO. 8140-N493)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.