ZZ-M-43a
15 JULY 1952
SUPERSEDING
Int. Fed Spec ZZ-M-43 (GSA-FSS)
3 January 1952

FEDERAL SPECIFICATION

MATS, FLOOR (FOR CHAIRS)

This specification was approved by the Commissioner Federal Supply Service, General Services Administration, for the use of all Federal agencies

1. SCOPE AND CLASSIFICATION

1.1 **Scope.** — The mats covered by this specification are primarily intended for the protection from wear of rugs and to allow easy movement of the chair. They shall be made with either a single or double lip suitable for extending under desks or tables (see figures 1 and 2).

1.2 **Classification**

1.2.1 *Types* — The mats shall be of the following types as specified:

Type I —Single lip
Type II —Double lip

1.2.2 *Sizes* —The mats shall be furnished in sizes defined in table I, and as specified in the invitation for bids. (See 3.2.)

1.2.3 *Thickness* — The thickness of the mats shall be ¼ inch to ½ inch. (See table I.)

1.2.4 *Colors* —The color of the mats shall be black, brown or green as specified in the invitation for bids. (See 6.1.)

1.2.5 *Grade* —The grade shall be that commercially known as firsts.

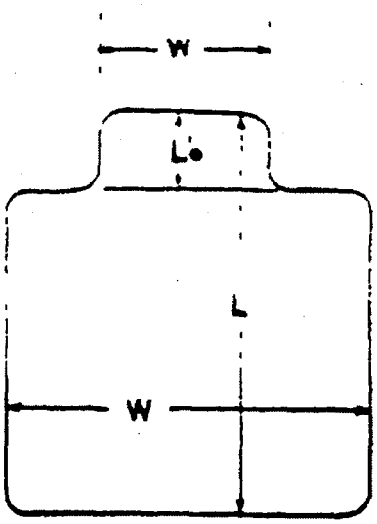


FIGURE 1 —*Single lip*

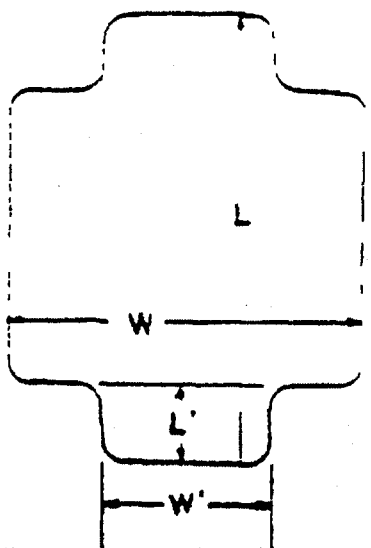


FIGURE 2 —*Double lip*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:24Z
Check the source to verify that this is the current version before use.

2. APPLICABLE SPECIFICATIONS

2.1 There are no other specifications applicable to this specification except those referenced in section 3 by individual departments

(Copies of Federal specifications and the Federal Specifications Index may be obtained upon application, accompanied by money order, coupon, or cash to the Superintendent of Documents Government Printing Office Washington 25 D C, or to the GSA Regional Offices in Boston, New York Atlanta Chicago Kansas City Mo Dallas Denver San Francisco, and Seattle Prices may be obtained from the Superintendent of Documents or from the GSA Regional Offices)

3 REQUIREMENTS

3.1 **Material**—The material shall be hard-pressed composition fiber or other compounded materials suitable to insure compliance with the requirements of this specification

3.2 **Physical requirements**—The mats shall conform to the requirements in table I for the weight full width and length thickness and width and length of the single and double lip

3.2.1 *Lips*—The lip or lips shall be equal distances between the sides

3.2.2 *Tolerances*—A tolerance of ± 1 inch will be permitted except where minimum and maximum dimensions are indicated

3.3 **Strength.**—The mats shall withstand a transverse strength test of not less than 125 pounds per 6 inches of width when tested as described in 4.3.2

3.4 **Hardness.**—The indentations shall be not more than 0.010 inch when tested as described in 4.3.3

3.5 **Serviceability**—All mats shall lie flat on a flat surface without showing signs of warp or curl Mats shall not break, crack, crumble curl or show visible indentation when tested as described in 4.3.1

3.6 **Color fastness**—The mats shall show

TABLE I—*Physical requirements*

			Single			
			Thickness		Lip	
Weight per foot	Full width W	Full length L	Minimum	Maximum	Lowest minimum l	Width w
Pounds	*Inches*	*Inches*	*Inch*	*Inch*	*Inches*	*Inches*
11	36	48	3/8	1/2	9 1/2	1"
12	36	48	3/8	1/2	9 1/2	1"
13	48	54	3/8	1/2	10	1"
Double						
15.4	48	54	3/8	1/2	10	19
17.4	48	60	3/8	1/2	10 1/2	19
19.6	48	66	---	1/2	10 1/2	19
23	48	72	3/8	1/2	10 1/2	19

* When specified, this dimension shall be 27 1/2 ± 1 inch
† See figs 1 & 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:24Z
Check the source to verify that this is the current version before use.

good colorfastness when tested as described in 4.3.4

3.7 Finish —The mats shall have a smooth, polished water-resistant finish on both sides or on one side with the under surface roughened to prevent slipping as specified in the invitation for bids The edges shall be smoothly beveled and the corners rounded (See 4 3 4)

3.8 Workmanship — The mats shall be free from cracks, embodied foreign matter blisters and other defects which affect their appearance or which may impair their serviceability

4 SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Sampling. — One mat of each type size, thickness and color shall be taken from each lot of 100 mats or fraction thereof offered for delivery

4.2 Inspection —Inspection shall be made at the point of delivery or at the factory at the discretion of the purchasing agent

4.3 Tests

4.3.1 *Serviceability test* —Each sample mat shall be placed on a flat surface rug or carpeting which shall be on a flat hard surfaced (wood or concrete) floor and the following test shall be conducted a chair provided with swivel-type casters having metal or hard composition wheels, 1½ inches in diameter and ¾-inch tread shall be used for the test The seat of the chair shall have an applied load or force of 600 ± 10 pounds during the test The chair shall be rolled from the floor over the edge onto the mat across the mat and over the outer edge of to the floor. This procedure shall be repeated 15 times in succession, in as nearly the same places on the mat as practicable Failure of any mat to meet any of the above mentioned requirements will be considered as failing to meet specification requirements (See 3.5.)

4.3.2 *Transverse strength test.* — At least three specimens 3 inches wide and 12 inches long shall be taken from any portion of the mat for test The transverse strength shall be determined by placing a specimen on horizontal parallel supports 8 inches apart, and applying the load at midspan on a bearing parallel to the supports, at a rate of approximately 4 ± ⅛ inch per minute until the specimen breaks The bearing and supports shall be rounded to a radius of approximately ⅝ inch The transverse strength is the average strength of all the specimens

4.3.3 *Hardness test* —The indentation shall be determined by applying a load of 140 pounds to a flat ended foot 0 125 inch in diameter for a period of 30 seconds The depth of indentation shall be measured at the end of this period (See 3 4)

4.3.4 *Water-resistant finish* —A small portion of the surface shall be thoroughly cleaned by wiping vigorously with a clean, dry cloth Using a medicine dropper or glass rod one drop of water shall be placed on the clean surface After 5 minutes, tap or shake off the water and again wipe off the surface with a clean, dry cloth The mat shall be unwetted and unmarked by this treatment, and the cloth shall not be discolored by the color of the mat (see 3 6 and 3 7)

5 PREPARATION FOR DELIVERY

5.1 Packaging — Unless otherwise specified commercial packages will be acceptable

5.2 Packing —Unless otherwise specified the subject commodity shall be prepared for shipment to permit acceptance by carrier for transportation at the lowest applicable rate, and to afford maximum protection from normal hazards of transportation.

5.3 Marking.—Unless otherwise specified, shipping containers shall be marked with the name of the material, type, size, thickness, color, and the quantity contained therein, as

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:24Z
Check the source to verify that this is the current version before use.

defined by the contract or order under which shipment is made, the name of the contractor and the number of the contract or order

6 NOTES

6.1 **Ordering data** — Purchasers should specify the type (sec 1.2.1) size (1.2.2 and 3.2), thickness (1.2.3), color (1.2.4), one or both sides water resistant finish (3.7), and should exercise any desired options offered herein (4.2, 5.1, 5.2, 5.3 and sec 7)

6.2 It is believed that this specification adequately describes the characteristics necessary to secure the desired material and that normally no samples will be necessary prior to award to determine compliance with this specification. If for any particular purpose samples with bids are necessary they should be specifically asked for in the invitation for bids and the particular purpose to be served by the bid sample should be definitely stated. The specification to govern in all other respects.

6.3 Federal specifications do not include all types, classes, grades, sizes, etc. of the commodities indicated by the titles of the specification or which are commercially available but are intended to cover the types, etc. which are suitable for Federal Government requirements.

6.4 Transportation description

6.4.1 *Transportation description applicable to these items is*

Mat, fiberboard, wallboard,
In boxes
Carload weight 36,000 pounds
Truckload weight 36,000 pounds

Patent notice — When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

7 DEPARTMENTAL REQUIREMENTS

7.1 The following specifications, publications and standards of the issues in effect on date of invitation for bids and special requirements, form a part of this specification by the respective departments.

7.2 **Army and Air Force.**

7.2.1 *Applicable specifications and standards*

JAN-P-125—Packaging and Packing for Overseas Shipment — Barrier-Materials, Waterproof, Flexible
JAN-P-132—Packaging and Packing for Overseas Shipment — Crates, Unsheathed, Wood, Nailed
MIL-C-11456—Crates, Wood, Nailed, Unsheathed, Domestic Shipment

Military Standards

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129—Marking of Shipments

Copies of specifications, standards and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.

7.2.2 *Samples* — Sampling shall be conducted in accordance with Military Standard MIL-STD-105.

7.2.3 *Packing*

7.2.3.1 *For domestic shipment* —Floor mats shall be packed in nailed wood crates constructed in accordance with Military Specification MIL-C-11456, style C, type I. Gross packed weight shall not exceed approximately 500 pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:24Z
Check the source to verify that this is the current version before use.

7.2.3.2 *For overseas shipment* —Floor mats shall be packed in nailed wood crates constructed and strapped in accordance with Military Specification JAN-P-132, style C. Gross packed weight shall not exceed approximately 500 pounds. The contents of each overseas shipping container shall be completely wrapped in a shroud made of waterproof barrier material conforming to Military Specification JAN-P-125 type L-2 or M. The shroud shall be adequately secured around contents to prevent loosening.

7.2.4 *Marking* —In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Military Standard MIL-STD-129.

7.3 Navy.

7.3.1 *Applicable specifications and standard*

Federal Specifications

NN-B-591—Boxes, Fiberboard, Wood-Cleated (for Domestic Shipment).
NN-B-601—Boxes, Wood-Cleated-Plywood, for Domestic Shipment.
NN-B-621—Boxes, Wood, Nailed and Lock-Corner.
NN-B-631—Boxes, Wood, Wirebound (for Domestic Shipment).
LLL-B-631—Boxes, Fiber, Corrugated (for Domestic Shipment).
LLL-B-636—Boxes, Fiber, Solid (for Domestic Shipment).

Military Specifications

JAN-P-105—Packaging and Packing for Overseas Shipment — Boxes, Wood, Cleated Plywood.
JAN-P-106—Packaging and Packing for Overseas Shipment — Boxes, Wood, Nailed.
MIL-B-107—Boxes, Wood, Wirebound (Overseas Type).
JAN-P-108—Packaging and Packing for Overseas Shipment — Boxes, Fiberboard (V-Board and W-Board), Exterior and Interior.
JAN-P-138—Packaging and Packing for Overseas Shipment — Boxes, Wood, Fiberboard-Lined.
MIL-A-140—Adhesive, Water-Resistant, Waterproof Barrier-Material.

Navy Department Specification

General Specifications for Inspection of Material.

Military Standard

MIL-STD-129—Marking of Shipments.

7.3.2 *Inspection procedures (Navy only)* —For Naval purchases the general inspection procedures shall be in accordance with General Specifications for Inspection of Material.

7.3.3 *Packing*

7.3.3.1 *For domestic shipment*

7.3.3.1.1 The subject commodity packaged as described in 5.1 shall be packed so as to insure arrival at destination in satisfactory condition and in containers complying with the Consolidated Freight Classification Rules for the lowest rates.

7.3.3.1.2 *For domestic shipment involving extended storage (Navy only)* —The subject commodity packaged as described in 5.1 shall be packed in wood-cleated fiberboard, wood-cleated-plywood nailed wood, wirebound wood, corrugated fiber or solid fiber boxes conforming to Federal Specifications NN-B-591, NN-B-601, NN-B-621, NN-B-631, LLL-B-631 and LLL-B-636 respectively. The gross weight of wood boxes shall not exceed approximately 200 pounds. The gross weight of fiberboard boxes shall be subject to the limitation of the box specification.

7.3.3.2 *For overseas shipment* — The subject commodity packaged as described in 5.1 shall be packed in cleated-plywood, nailed wood, wirebound, fiberboard, or fiber-boxes conforming to Military Specifications JAN-P-105, JAN-P-106, MIL-B-107, JAN-P-108, and JAN-P-138, respectively. The gross weight of wood boxes shall not exceed

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:24Z
Check the source to verify that this is the current version before use.

approximately 150 pounds, and of fiberboard boxes, approximately 70 pounds The contents shall be enclosed within a sealed waterproof bag or its equivalent, made from materia conforming to Military Specification JAN-P-125 for case liner materia. Seams and closures shall be sealed with adhesive conforming to Military Specification MIL-A-140

7.3.4 *Marking* —In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Military Standard MIL-STD-129

7.3.5 *Ordering data* — Procurement documents should specify if domestic packing and marking is required if overseas packing and marking is required or if both domestic and overseas packing and marking are required (see 7.2.4 and 7.2.5)

NAVY INTEREST S

This specification is a part of Section II, Part 5, of the Federal Standard Stock Catalog

For sale by the Superintendent of Documents Washington 25 D C Price 5 cents

Source: https://assist.dla.mil - Downloaded: 2026-10-26T12:24Z
Check the source to verify that this is the current version before use.