INCH-POUND
MIL-C-83413/3A
19 NOVEMBER 1993
SUPERSEDING
MIL-C-83413/3
23 March 1984

MILITARY SPECIFICATION SHEET

CONNECTORS AND ASSEMBLIES, ELECTRICAL, AIRCRAFT GROUNDING TYPE III GROUNDING ASSEMBLY, DISCHARGER, ELECTROSTATIC

This specification is approved for use by all Departments and Agencies of the Department of Defense

(A) The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of specifications and standards (DODISS) specified in the solicitation MIL-C-83413

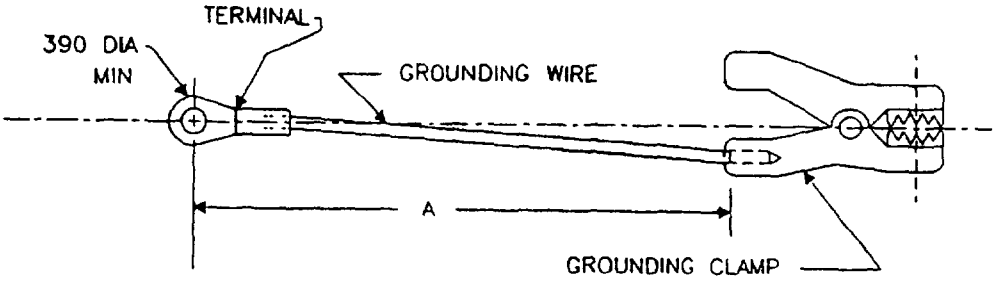

FIGURE 1 Type III grounding assembly

(A) denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 202640-23T08:01Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Grounding wire 7 X 7 wire in accordance with MIL-W-83420, type II, composition B, jacket color international orange in accordance with FED-STD-595

Grounding clamp In accordance with MIL-C-83413/7

Terminal In accordance with MS20659 Terminal shall accommodate 375 stud

Splices Shall not be used

Assembly resistance Resistance of the grounding assembly shall not exceed 500 +(6XA) milliohms

Part or Identifying Number (PIN)

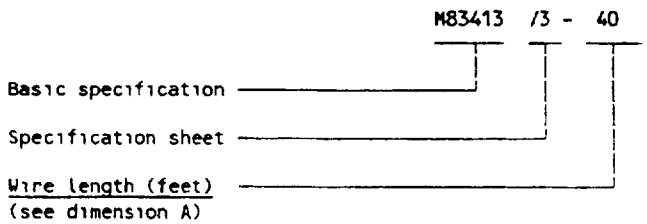

Wire length shall be 10, 20, or 40 feet ±1 foot

(A) QUALIFICATION

(A) Qualification is not required for this specification sheet First article inspection shall be a visual and mechanical inspection in accordance with 4 7 1 of MIL-C-83413

CONCLUDING MATERIAL

Custodians
Army - AV
Navy - AS
Air Force - 85

Review activities
Army - AR, CR, ME, MI
Navy - MC
Air Force - 13, 18, 82, 90, 99

Preparing activity
Air Force - 85

Agent.
DLA - ES

(Project 5920-0499-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:01Z
Check the source to verify that this is the current version before use.