
MILITARY SPECIFICATION SHEET

SWITCHES, THERMOSTATIC, (BIMETALLIC) TYPE II, HERMETICALLY SEALED, SINGLE POLE, SINGLE THROW, (SPST) 2 AMPERES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switches described herein shall consist of this specification and the latest issue of MIL-S-24236.

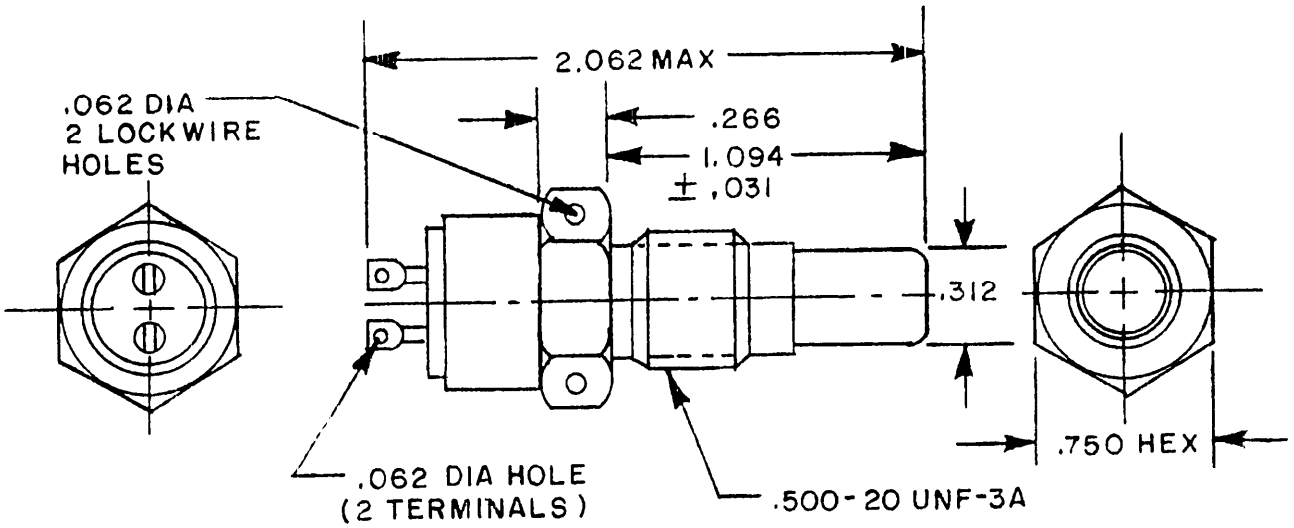


Ⓒ CONFIGURATION A

FIGURE 1. Dimensions and configuration.

Ⓒ denotes changes

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:32Z
Check the source to verify that this is the current version before use.

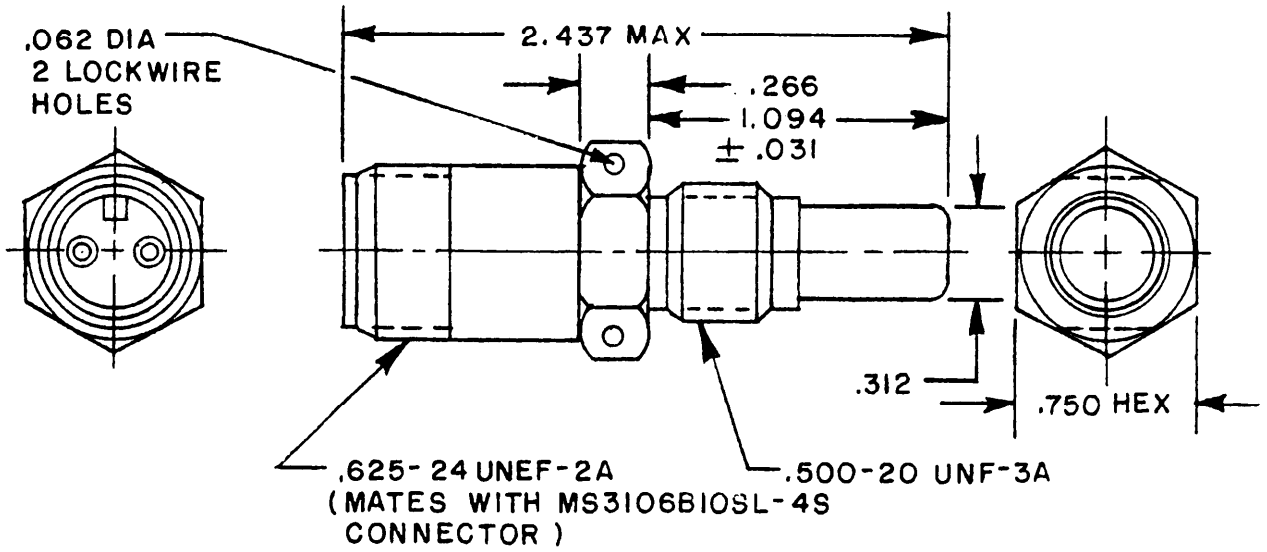

© CONFIGURATION B

INCHES	MM
.031	.79
.062	1.57
.266	6.76
.312	7.92
.500	12.70
.625	15.88
.750	19.05
1.094	27.79
2.062	52.37
2.437	61.90

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three place decimals.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:32Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table III.

Class: 4.

Operating temperature range: 0°F to 700°F.

Ⓒ Operating temperature tolerances: 0°F - 400°F ±5°F,
401°F - 700°F ±10°F.

Ⓒ Operating temperature differential: 0.60°F to 5.0°F.

Mounting: See figure 1.

Weight:

Configuration A - 1.5 ounces maximum.
Configuration B - 2.0 ounces maximum.

Electrical ratings: See table I.

Ⓒ TABLE I. Electrical ratings.

Load	28 V dc	115 V ac, 60 Hz	Life cycle
	Amperes	Amperes	
Resistive	2.0	2.0	10,000
Resistive	1.0	1.0	20,000
Inductive	0.5	0.5	10,000
Inductive	0.25	0.25	20,000

Torque: Switch mounting - 15 foot-pounds maximum.
Connector - 8 foot-pounds maximum.

Endurance: See table I.

Qualification:

Group submission: See table II.


TABLE II. Group submission.

Configuration	Number of samples required	Tests	Extent of approval
A	3	Visual and mechanical inspection and torque	All
B	All per qualification table of MIL-S-24236	Complete per qualification table of MIL-S-24236 and torque	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:32Z
Check the source to verify that this is the current version before use.

Part number: Part numbers shall be assigned as illustrated below:

Example:

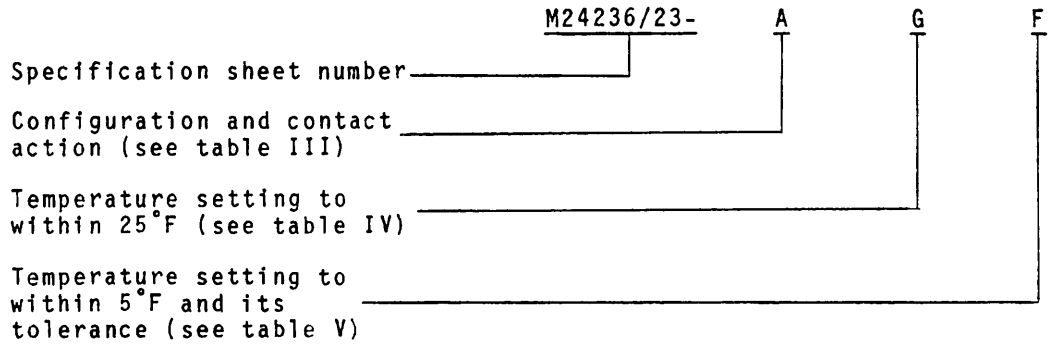

Part number M24236/23-AGF identifies a switch of configuration A which opens on increasing temperature at 150°F ±5°F.

TABLE III. Configuration and contact action.

Configuration		Contact action
A	B	
A	C	Open on increasing temperature
B	D	Open on decreasing temperature
A	C	Close on decreasing temperature
B	D	Close on increasing temperature

TABLE IV. Temperature setting to within 25°F.

Code	Temperature	Code	Temperature	Code	Temperature
	°F		°F		°F
A	0	M	275	Y	550
B	25	N	300	Z	575
C	50	P	325	1	600
D	75	Q	350	2	625
E	100	R	375	3	650
F	125	S	400	4	675
G	150	T	425	5	700
H	175	U	450		
J	200	V	475		
K	225	W	500		
L	250	X	525		

Ⓒ TABLE V. Temperature setting to within 5°F and its tolerance.

Units	Tolerance 1/	
	±5°F	±10°F
+0	F	L
+5	G	M
+10	H	N
+15	J	P
+20	K	Q

1/ Code letters A-E (±3°F), R-V (±15°F), and W-1 (±20°F) have been cancelled from table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:32Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI, AR
Navy - SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AT, AV
Navy - MC

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5930-1217-2)

Source: https://assist.dla.mil - Downloaded: 2026-10-19T20:32Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:32Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-24236/23C	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION (Mark one)
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER (Specify): _____
b. ADDRESS (Street, City, State, ZIP Code)	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER (Last, First, MI) – Optional	b. WORK TELEPHONE NUMBER (Include Area Code) – Optional
c. MAILING ADDRESS (Street, City, State, ZIP Code) – Optional	8. DATE OF SUBMISSION (YYMMDD)

DD FORM 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-01-19T20:32Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

Naval Electronic Systems Command
Washington, DC 20363

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20363
ATTN: ELEX 8111

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:32Z
Check the source to verify that this is the current version before use.