MIL-C-51177B(EA)
16 September 1974
SUPERSEDING
MIL-C-51177A(MU)
13 May 1969

MILITARY SPECIFICATION

COUPLING, CANISTER, ABC-M1

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers a connector molded to a rubber cap.

2. APPLICABLE DOCUMENTS

2.1 Government documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

STANDARDS

FEDERAL

FED-STD-123 - Marking for Domestic Shipping (Civil Agencies).

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

DRAWINGS

US ARMY ARMAMENT COMMAND

EDGEWOOD ARSENAL

D5-1-271 - Coupling, Canister, ABC-M1.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

FSC 4240

Source: https://assist.dla.mil -- Downloaded: 20261O-22T20:52Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Materials and components.

3.1.1 Materials. All materials cited on Drawing D5-1-271 and on the subsidiary drawings shall conform to the specifications listed thereon, or to the specific characteristics set forth on the drawings.

3.1.2 Components. All components of the coupling shall conform to the specifications and drawings listed on Drawing D5-1-271 and subsidiary drawings.

3.2 Manufacture and assembly. The coupling shall be manufactured and assembled as specified on Drawing D5-1-271.

3.3 Workmanship. The coupling shall be free from abraded surfaces, burred or bent metal sections or foreign matter (dirt, oily or viscous material.)

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.

4.1.1 Supplier's responsibility. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forht in the specification where such inspections are deemed necessary to assure supplies and services conform to specified requirements.

4.1.2 Objective evidence. The supplier shall provide objective evidence acceptable to the contracting officer that the requirements of 3.1 and section 5 for which specific inspection has not been provided in this specification have been satisfied.

4.2 Quality conformance inspection.

4.2.1 Lotting. A lot shall consist of the couplings produced by one manufacturer, at one plant, from the same materials, under essentially the same manufacturing conditions.

4.2.2 Sampling. Sampling shall be conducted in accordance with MIL-STD-105. For minor defects level S-1 shall be used.

4.2.3 Inspection procedures. Sample couplings shall be examined in accordance with the classification of defects and MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:52Z
Check the source to verify that this is the current version before use.

4.2.3.1 Classification of defects.

(a) Coupling, Canister, ABC-M1 (Dwg. D5-1-271).

Categories		Defects
Critical:		None defined
Major:	AQL 0.65 percent defective	
101		Cap-coupling surfaces not flush within 0.02
102		Workmanship (see 3.3)
Minor:	AQL 4.0 percent defective	
201		3.250 dimension
202		17/32 dimension
203		7/8 dimension
204		3/16 dimension
205		30° angle
206		3-1/8 dimension
207		3-27/64 dimension

(b) Connector (Dwg. C5-1-272).

Categories		Defects
Critical:		None defined
Major:	AQL 0.65 percent defective	
101		Connector inside diameter incorrect
102		Connector outside diameter
103		Connector 0.865 dimension
104		Connector 0.492 length
105		Connector 53° angle
106		Connector 45° angle
107		Connector 6° angle
108		Connector 0.211 dimension
109		Connector 0.080 dimension
110		Connector 0.422 dimension
111		Connector 0.187 dimension
112		Connector 0.110 dimension
113		Connector 0.109 dimension

Source: https://assist.dla.mil -- Downloaded: 20261O-22T20:52Z
Check the source to verify that this is the current version before use.

4.2.3.1 Classification of defects (continued).

(c) Connector (Dwg. D5-1-274).

Categories		Defects
Critical:		None defined
Major:	AQL	0.65 percent defective
101		Connector 0.765 dimension
102		Connector 0.723 diameter
103		Connector machine finish

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing and marking, interplant shipment (see 6.3). The couplings shall be packaged and packed to afford adequate protection from the supplier to the first receiving activity for immediate use. Shipping containers shall comply with the rules and regulations applicable to the mode of transportation. In addition to any marking required by the contract or order, marking shall conform to FED-STD-123.

5.2 Repair part. When this item is procured for storage and issue as a repair part, preservation, packaging, packing and marking shall be as specified on the repair part packaging data sheet which is identified by the National stock number for the repair part.

6. NOTES

6.1 Intended use. The coupling is intended to be used to couple the M10A1 canister to the hose of chemical-biological items.

6.2 Ordering data. Procurement documents should specify the following:

(a) The title, number and date of this specification.
(b) The color of the rubber cap.

6.3 Interplant Shipments. Packaging for supplies and materials which will not enter the military supply system. Typical interplant shipments are shipments from a vendor to a subcontractor or a prime contractor, or from a subcontractor to a prime contractor, or from a vendor or contractor to a military arsenal or plant.

Source: https://assist.dla.mil -- Downloaded: 20261O-22T20:52Z
Check the source to verify that this is the current version before use.

6.4 International interest. Certain provisions of this specification are the subject of international standardization agreement QSTAG 216. When amendment, revision, or cancellation of this specification is proposed which will affect or violate the international agreement concerned, the preparing activity will take appropriate reconcilliation action through international standaridzation channels including departmental standaridzation offices, if required.

6.5 Figure 1. Figure 1 is a miniature reproduction of assembly drawing and is attached for information only.

Custodian:

Army - EA

Preparing activity:

Army - EA


Project No. 4240-A643

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:52Z
Check the source to verify that this is the current version before use.

LINE	DRAWING NUMBER	DATE	NO. REQD	NOMENCLATURE	MATERIAL	SPECIFICATION NUMBER	DATE
1							
2	DF-41-[illegible]		–	COUPLING, CANISTER, ASSEMBLY AND DETAIL		MIL-C-51177	
3							
4				ANODIC COATINGS, FOR ALUMINUM AND ALUMINUM ALLOYS		MIL-A-8625	
5							
6			–	FLUX, BRAZING, FOR ALUMINUM AND ALUMINUM ALLOYS		—	
7			–	FLUX, ALUMINUM AND ALUMINUM ALLOY WELDING		MIL-F-6983	
8			–	RODS, WELDING, ALUMINUM AND ALUMINUM ALLOYS		QQ-R-566	
9				BRAZING ALLOYS, [illegible] DESIGNATED FILLER METAL		QQ-B-654	
10							
11							
12			1	CAP	SYNTHETIC RUBBER	MIL-R-3065	
13							
14							
15							
16	DF-[illegible]-[illegible]		(A)1	CONNECTOR	ALUMINUM ALLOY CASTING OR ALUMINUM ALLOY CASTING	QQ-A-596 OR QQ-A-591	
17							
18							
19							
20							
21							
22							
23							
24	DF-41-2-15		(A)1	CONNECTOR, ASSEMBLY AND DETAIL		—	
25				(A) ALTERNATE			

LINE	DRAWING NUMBER	DATE	NO. REQD	NOMENCLATURE	MATERIAL	SPECIFICATION NUMBER	DATE
26			1	RING, RETAINING, CLOSED TYPE, STD AND SECTION, .759 ID X .059 DIA WIRE			
27							
28							
29							
30	CS-1-272		1	CONNECTOR	ALUMINUM ALLOY	QQ-A-200/3	
31							
32	BS-1-273		1	FLANGE	ALUMINUM ALLOY, OR ALUMINUM ALLOY	QQ-A-250/8 OR QQ-A-250/11	
33							
34							
35	DS-1-274A		(A)1	CONNECTOR, ASSEMBLY AND DETAIL			
36							
37			1	CONNECTOR	ALUMINUM ALLOY	MIL-T-7081/6	
38							
39							
40			1	STOP	ALUMINUM ALLOY	QQ-A-250/8	
41							
42	BS-1-273		1	FLANGE	ALUMINUM ALLOY, OR ALUMINUM ALLOY	QQ-A-250/4 OR QQ-A-225/11	
43							
44							
45							
46							
47							
48							
49							
50							

SYM	REVISIONS DESCRIPTION	DATE	APPROVED
	[illegible]		
	[illegible]		
	[illegible]		
	[illegible]		
	[illegible]		
	[illegible]		
	[illegible]		
	[illegible]		
	[illegible]		
B4	(1) DELETED (2) B/A [illegible]		
	LINE 1, [illegible]		
	SL 35[illegible] (2) ML STD-171 2N		
	LINE 4 [illegible] ADDED		
	MIL-D-3 A5; [illegible] ADDED		
	FR: [illegible]		
	N.C. 1-1; [illegible] LINE 2 [illegible]		
	WAS 4.187-52-181, [illegible]		
	AND 43 ADDED		
C	LINE 6 WAS MIL-S-[illegible]		
	LINE 30 WAS QQ-A-[illegible]		
	LINE 32 AND 43 WAS QQ-A-355; LINE 33 AND 43 WAS QQ-A-327.		
	LINE 37 WAS [illegible]		
	LINE 40 WAS QQ-[illegible]		
	ADDED CS-043 NOT ASSEMBLY; ADDED CODE 944		
D	E.O. 541-3 [illegible]		
E	NOR 516-801-001 INC		
F	NOR 541-027-001 INC		

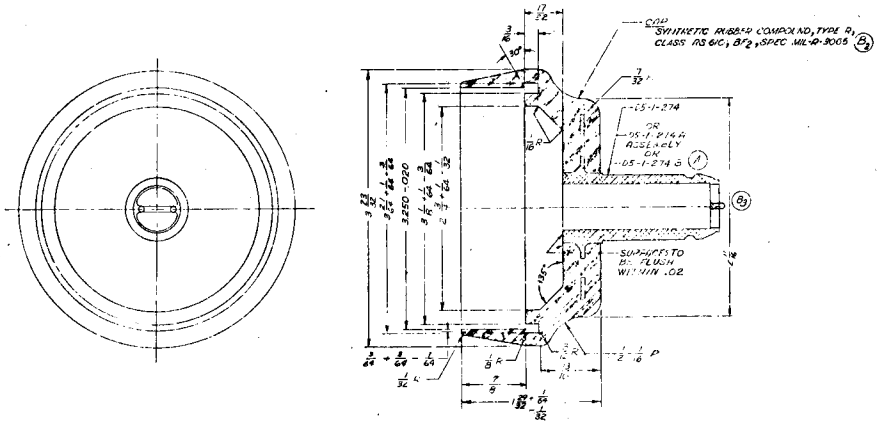

THIS FIGURE IS A MINIATURE COPY OF AN EDGEWOOD ARSENAL DRAWING AND IS FOR INFORMATION ONLY: THE DRAWING REFERENCE IN PARAGRAPH 2.1 GOVERNS

Figure 1
Coupling, Canister, ABC-M1

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:52Z
Check the source to verify that this is the current version before use.