MILITARY SPECIFICATION

PACKAGING OF MOUNT, TELESCOPE, M85

1. SCOPE

1.1 This specification covers the packaging, packing and marking for domestic shipment and storage, overseas shipment, and interplant shipment of Telescope Mount M85, with or without equipment.

Item	Stock No.
Telescope Mount M85 W/E	F001-6734106
Consisting of:	
1 Telescope Mount M85	F001-7648431
1 Instrument Light M36	F205-7690564

2. APPLICABLE SPECIFICATIONS, STANDARDS, DRAWINGS, AND PUBLICATIONS

2.1 The following specifications and standard of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

Federal

NN-B-601 - Boxes, Wood-Cleated-Plywood, For Domestic Shipment.
NN-B-621 - Boxes, Wood, Nailed and Lock Corner.
NN-B-631 - Boxes; Wood, Wirebound, For Domestic Shipment.
UU-T-111 - Tape, Paper, Gummed, (Kraft).
LLL-B-631 - Boxes; Fiber, Corrugated for Domestic Shipment.
LLL-B-636 - Boxes; Fiber, Solid for Domestic Shipment.
LLL-F-291 - Fiberboard, Corrugated, Single Face (Flexible).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:28Z
Check the source to verify that this is the current version before use.

Military

JAN-P-101 - Packaging and Packing for Overseas Shipment - Adhesive, Water-Resistant, for sealing Fiberboard Boxes.

JAN-P-105 - Packaging and Packing for Overseas Shipment - Boxes, Wood, Cleated, Plywood.

JAN-P-106 - Packaging and Packing for Overseas Shipment - Boxes, Wood, Nailed.

JAN-P-108 - Packaging and Packing for Overseas Shipment - Boxes, Fiberboard (V-Board and W-Board) Exterior and Interior.

MIL-P-116 - Preservation, Methods of.

JAN-B-121 - Barrier, Materials, Greaseproof.

JAN-P-125 - Packaging and Packing for Overseas Shipment - Barrier Materials, Waterproof, Flexible.

JAN-P-127 - Packaging and Packing for Overseas Shipment - Tape, Adhesive, Pressure Sensitive, Water-Resistant.

JAN-P-139 - Packaging and Packing for Overseas Shipment - Plywood, Container Grade.

MIL-A-140 - Adhesive, Water-Resistant, Waterproof Barrier Material.

MIL-L-3150 - Lubricating-Oil, Preservative, Medium.

MIL-P-11445 - Packaging of Lights, Aiming Post and Lights, Instrument.

Ordnance Department Tentative

AXS-1472 - Adhesive, Label (Water-Resistant).

STANDARD

MIL-STD-129 - Marking of Shipments.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer).

3. REQUIREMENTS

3.1 Materials - The following shall apply wherever packaging

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:28Z
Check the source to verify that this is the current version before use.

materials are referred to in this specification by name only:

Reference	Full Identification
Flexible single face corrugated fiberboard	Type 1 of Specification LLL-F-291
Flexible waterproof barrier material	Applicable requirements of Specification JAN-P-125
Gummed tape	Grade A or B of Specification UU-T-111
Pressure sensitive tape	Type II or III, grade A or B (at least 2 inches wide) of Specification JAN-P-127
Water-resistant adhesive	Applicable requirements of Specification JAN-P-140

3.2 Cleaning - The mount shall be cleaned so as to be free from dirt, smudges, fingerprints and other foreign substances in accordance with cleaning method C-1 of Specification MIL-P-116. The instrument light shall be cleaned in accordance with Specification MIL-P-11445.

3.3 Packaging (see Figure 2).

3.3.1 Prepackaging the mount without equipment

3.3.1.1 The metal cover on the level vial assembly shall be positioned so that the face of the level vial is covered.

3.3.1.2 All unpainted surfaces of the mount shall be coated with a preservative conforming to Specification MIL-L-3150. The coated surfaces shall then be wrapped or covered with greaseproof barrier material conforming to type II or III, grade C, class 1 or 2 of Specification JAN-B-121. The barrier material shall be secured in place with pressure sensitive tape conforming to any type and grade of Specification JAN-P-127.

3.3.1.3 The mount shall then be wrapped with two layers or thicknesses of flexible single face corrugated fiberboard (see Figure 2). The wrap shall be secured with gummed tape.

3.3.2 Prepackaging the telescope mount with equipment

3.3.2.1 The instrument light shall be packaged as specified in Specification MIL-P-11445, except that the box in which the bagged light is placed may be omitted if the bagged light is wrapped with flexible single face corrugated fiberboard, securing the wrap with gummed tape.

3.3.2.2 The mount shall be prepackaged as specified in 3.3.1, except that the packaged instrument light shall be secured to the mount prior to wrapping the mount with flexible single face corrugated fiberboard.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:28Z
Check the source to verify that this is the current version before use.

3.3.3 Unit package - Each prepackaged telescope mount, with or without equipment, shall be immobilized in a fiberboard box conforming to any compliance symbol, any style, except FTC, of Specification JAN-P-108. Each fiberboard box shall be closed by applying water-resistant adhesive over all areas of contact on the flaps and covering all seams, including the manufacturer's joints, with tape. The adhesive shall conform to Specification JAN-P-101. The seams of a box conforming to compliance symbol V1, V2, V3 or W5S of JAN-P-108 shall be sealed with pressure sensitive tape. The seams of other fiberboard boxes under Specification JAN-P-108 shall be sealed with gummed tape conforming to grade B of Specification UU-T-111.

3.3.4 Water-resistant overwrap - A fiberboard box which conforms to compliance symbol W5c, W6c or W6s of Specification JAN-P-108 shall be overwrapped with flexible waterproof barrier material conforming to type C-1, C-2 or E-1 of Specification JAN-P-125. Water-resistant adhesive shall be applied over all areas of contact on the seams and between the flaps on the ends. All seams shall be covered with pressure sensitive tape.

3.4 Packing

3.4.1 For domestic shipment and storage

3.4.1.1 The shipping container shall conform to one of the following specifications:

NN-B-601, style A or B, type B or C
NN-B-621, style 2 or 4

3.4.1.2 Nailed wood boxes shall be strapped with flat steel straps as required in Specification NN-B-621. Where the gross weight exceeds 100 pounds, plywood boxes shall be strapped with flat steel straps in accordance with Specification JAN-P-105. Straps shall not be stapled. The gross weight of each shipping container shall not exceed the limits of the box specification; however, in no instance shall the gross weight exceed 200 pounds.

3.4.2 Overseas shipment

3.4.2.1 The shipping container shall conform to either of the following specifications, utilizing group I or II lumber and flat steel straps:

JAN-P-105, Style A or B. Plywood shall conform to type A or B, condition I of Specification JAN-P-139.
JAN-P-106, Style 2 or 4. Minimum thickness of lumber for sides, top and bottom shall be 11/16 inch when shipment is to be made by an ocean going vessel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:28Z
Check the source to verify that this is the current version before use.

3.4.2.2 Quantity of mounts packed in shipping container - Six unit packaged mounts, with or without equipment shall be packed in the overseas shipping container.

3.4.2.3 Size and weight of packed shipping container - The following inside dimensions, cubage and gross weight are approximate for six unit packaged mounts with or without equipment, packed in a nailed wood box:

Inside dimensions	- 25." long x 19." wide x 12-1/2" deep
Cubage	- 4.7 cubic feet
Gross weight	- 77. pounds

3.4.3 Immobilizing - The contents of each shipping container shall be immobilized in such a manner that they cannot move about after the container is closed.

3.5 Identification and marking

3.5.1 Unit container and water-resistant overwrap - The identification data required in Standard MIL-STD-129 for interior packages shall be added to each unit container and water-resistant overwrap by printing or marking either directly on the exterior surface or on a label affixed to the exterior surface. The serial number of each mount shall be added in the identification data on each unit package.

3.5.1.1 (See 3.5.3 for inspection seals.)

3.5.2 Shipping container - In addition to other markings that may be required (see 6.2), the information to be placed on each container shall be in accordance with Standard MIL-STD-129. The identification data shall be stencilled or printed on the container. Packing lists containing the serial numbers of the mounts in the container shall be inclosed.

3.5.2.1 (See 3.5.3 for inspection seals.)

3.5.3 Official Ordnance Corps inspection seal (Escutcheon) - Evidence of inspection shall be shown by either stamping the escutcheon on each box, water-resistant overwrap and shipping container or by affixing paper seals to same.

3.5.3.1 Unit container and water-resistant overwrap - If paper seals are used, a seal shall be affixed to each box in such a manner that the seal will be damaged if the box is opened. Two paper seals shall be affixed to each overwrap in such a manner that at least one of the seals will be damaged if the overwrap is removed. If a rubber stamp is used, the escutcheon shall be applied in such a manner that at least a portion of it is on the sealing tape which is used to seal the box and the overwrap. The overwrap shall be stamped in two places in such a fashion that at least one of the escutcheons will be damaged if the overwrap is removed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:28Z
Check the source to verify that this is the current version before use.

3.5.3.2 Shipping container - Either a paper seal or stamped escutcheon shall be placed adjacent to the permanent markings on each container.

3.5.3.3 Application of Ordnance District's Symbol - The Ordnance District's Symbol, such as NYOD, BOD, etc., shall be added on each paper seal and adjacent to each stamped escutcheon.

3.5.4 Coating labels and paper seals - If labels and paper seals are used, they shall be affixed and coated with water-resistant label adhesive conforming to Specification AXS-1472.

3.6 Interplant shipment - Where an interplant shipment is involved, the following cleaning, packaging, packing and marking requirements shall apply:

3.6.1 Cleaning - Cleaning shall be in accordance with 3.2.

3.6.2 Packaging - Packaging shall be as specified in 3.3 except as follows:

3.6.2.1 The preservative and greaseproof barrier material, specified in 3.3.1.2, may be omitted.

3.6.2.2 The instrument light shall be packaged for interplant shipment in accordance with Specification MIL-P-11445.

3.6.2.3 A fiberboard box conforming to Specification LLL-B-631 or LLL-B-636 may be used in lieu of the box specified in 3.3.3. The box shall be closed as specified in 3.3.3 for a W5c or W6 fiberboard box.

3.6.2.4 The water-resistant overwrap specified in 3.3.4 may be omitted.

3.6.3 Packing

3.6.3.1 The shipping container shall conform to one of the following specifications:

NN-B-601	LLL-B-631)	Style RSC or OLC (full
	LLL-B-636	overlap)
NN-B-621		
NN-B-631		

3.6.3.2 Fiberboard boxes shall be closed as specified in 3.3.3 for a W5c or W6 fiberboard box.

3.6.3.3 The gross weight of each shipping container shall not exceed the limits of the box specification; however, in no instance shall the gross weight exceed 200 pounds.

3.6.3.4 Each fiberboard shipping container shall contain a water-resistant case liner or bag (in which the contents are packed) fabricated from flexible waterproof barrier material. Joints and closures shall be completely sealed with a continuous seam, at least two inches wide, of water-resistant adhesive. Inside surfaces of each wood shipping container shall be lined with flexible waterproof barrier material.

3.6.3.5 The contents of each shipping container shall be immobilized as specified in 3.4.3.

3.6.4 Identification and marking - Identification and marking shall be as specified in 3.5, except that the serial number in the identification data on the unit package and the packing lists may be omitted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:28Z
Check the source to verify that this is the current version before use.

4. SAMPLING, INSPECTION AND TEST PROCEDURES

4.1 Inspection - Inspection shall be made throughout the entire process of packaging and packing.

4.2 Test procedures - The Government reserves the right to use any established commercial method of test, and such additional information deemed necessary to determine compliance with the requirements and intent of this specification.

5. PREPARATION FOR DELIVERY

Not applicable.

6. NOTES


6.1 Ordering data - Invitation for bids and contracts or orders should specify the title number and date of this specification, the type of shipment involved, and the type of packaging and packing required.

6.2 The marking of overseas shipping containers by Army Installations should be in accordance with Department of the Army and Air Force Manual SR 746-30-5, "Marking of Oversea Supply."

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

CUSTODIAN:
Army - Ordnance Corps

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:28Z
Check the source to verify that this is the current version before use.

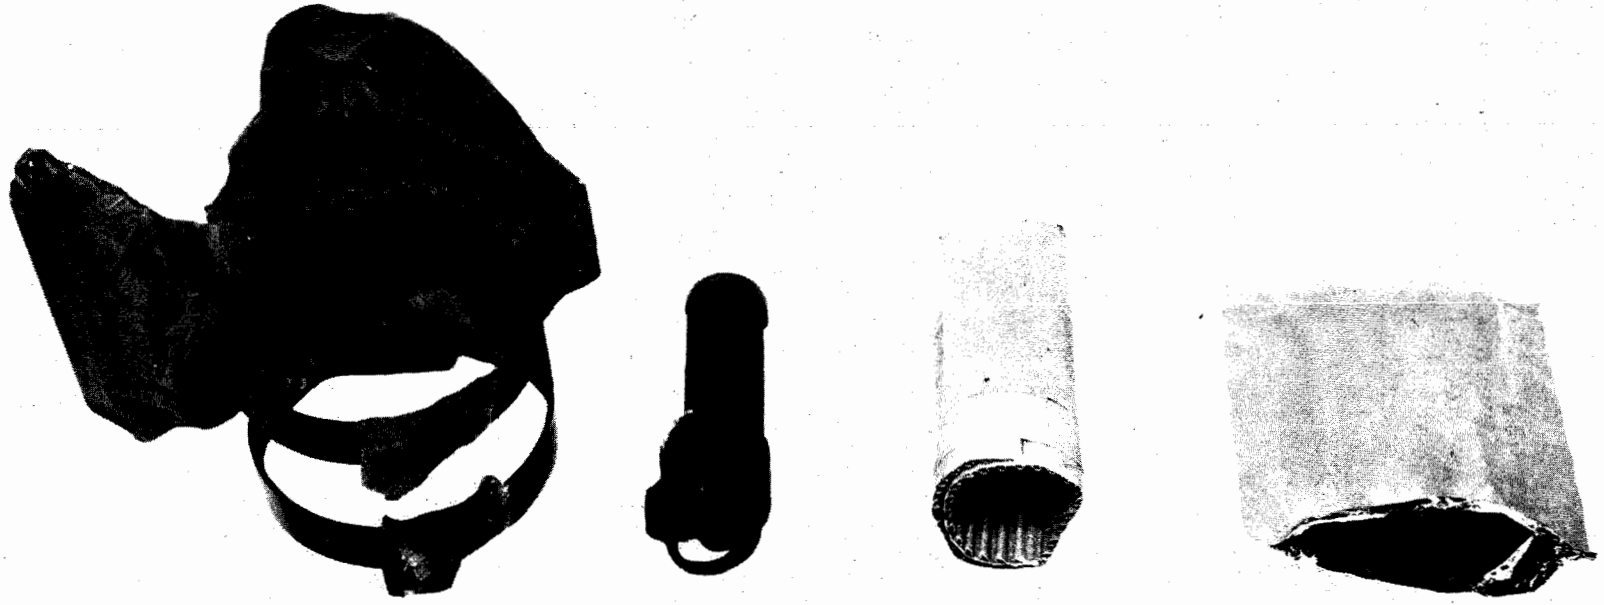

NEG. #22492-1 4/29/52 FRANKFORD ARSENAL ORD. CORPS


MOUNT, TELESCOPE, M85, W/E - prepackaging the mount and instrument light.
FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:28Z
Check the source to verify that this is the current version before use.



NEG. #22492-2 4/29/52



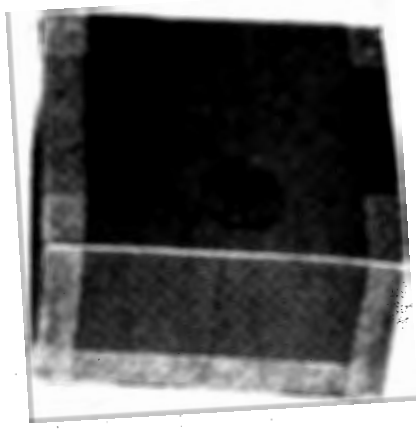

FRANKFORD ARSENAL

ORD. CORPS

MOUNT, TELESCOPE, M85, W/E - packaging the mount and instrument light.
FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:28Z
Check the source to verify that this is the current version before use.