
FED. SUP CLASS
5935

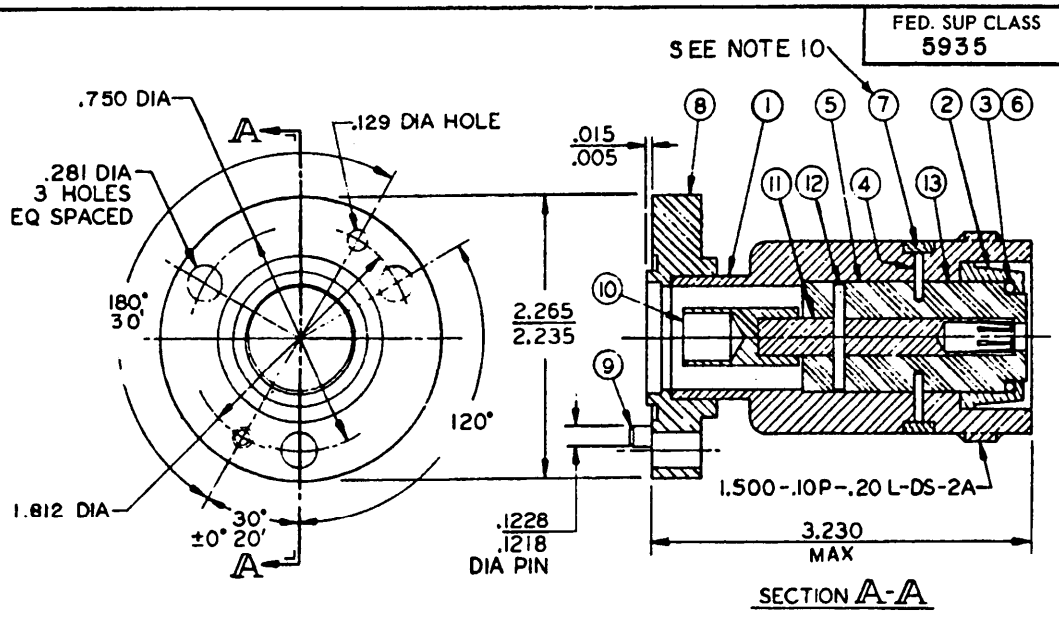

SECTION A-A

Item No.	Drawing number	Description	Qty
8	ES-C-193223	Flange	1
9	ES-B-193224	Pin	1
10	ES-B-193227	Conductor	1
4	ES-C-193230-1	Dowel, .125 dia x .300 lg	2
7	ES-C-193230-2	Potting compound	As req'd
5	ES-B-193232	Conductor assy	1
12	ES-B-193232-1	Rod	1
11	ES-B-193233	Contact	1
13	ES-B-193234	Insulator	1
1	ES-C-193319	Body assy	1
(A) 6	SM-B-424110	Lubricant 'O' Ring	As req'd
(A) 3	SM-B-424112-2	'O' Ring	1
(A) 2	SM-B-424149	Insert	1

MS PART NO.	MS90573-1532

INCHES	MM
.005	.13
.015	.38
.10	2.54
.1218	3.09
.1228	3.12
.125	3.18
.129	3.28
.20	5.08
.281	7.14
.300	7.62
1.500	38.10
1.750	44.45
1.812	46.02
2.235	56.77
2.265	57.53
3.230	82.04

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.005.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Packaging and packing of assembled items shall conform to MIL-A-27434.
5. (A) Apply minute amount of lubricant to SM-B-424112-2 on assembly.
6. Rigid line flange to be in accordance with MIL-F-24044/1-02.
7. The part number consists of the MS Military Standard number followed by dash number. The dash '1532' is derived from assigned nomenclature.
8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
9. Referenced documents shall be of the issue in effect on date of invitation for bids.
10. Use 50/50 mix; 2741 and 2715 as supplied by Emerson and Cumming Inc., Canton, Mass. or equal.

ENGINEERING DATA: Radio frequency, coaxial, connector adapter; nominal impedance, 50 ohms; rated at 1000 volts RMS; practical frequency limit 5 G Hz.

APPROVED 21November 1967 REVISED (A) 25 July 1968

Army MI +, EL +
Navy EC +, AS @, OS @,
MC @, CG @
AF 11 +, 85 +, 17 +,
19 @, 14 @

nilitary standard is mandatory for use by all Departments and Agencies of the tment of Defense. Section for all new engineering and design applications r repetitive use shall be made from this document.

P.A. EL Other Cust EC 11	International Interest	TITLE ADAPTER, CONNECTOR (A) TYPE UG-1532/U, 7/8 COUPLING FLANGE-QL FEMALE CONNECTOR	MILITARY STANDARD MS90573
Procurement Specification MIL-A-27434		SUPERSEDES: ES-DL-193229	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:40Z
Check the source to verify that this is the current version before use.