
FED. SUP CLASS
9540

SHARP EDGES ROUNDED .010

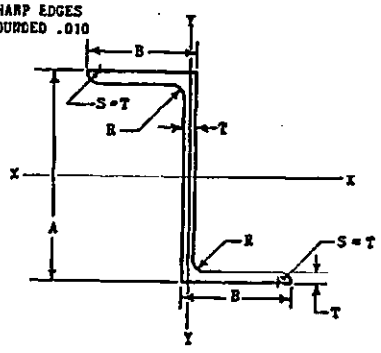

NOTES ON SYMBOLS

Ixx (and Iyy) = MOMENT OF INERTIA ABOUT XX AND YY.

ρxx (and ρyy) = RADIUS OF GYRATION ABOUT XX AND YY.

DASH NUMBER: IS DIE NUMBER AND INDICATES EACH SHAPE AND SIZE OF SECTION. EXAMPLE: IN "AND10139-1001", "10138" INDICATES "ZEE-EQUAL LEG", 10 INDICATES 1.0" FOR DIMENSION "A" (1.000 IN COL. "A"). 01 IN 1001 IS SERIAL NUMBER ONLY.

MATERIAL SHALL BE IN ACCORDANCE WITH APPLICABLE GOVERNMENT SPECIFICATIONS.

AND 10138 DASH NO'S	NOMINAL DIMENSIONS				AREA	SECTION ELEMENTS			
	A	B	T	R		Ixx	Iyy	ρxx	ρyy
	Inches				Square Inches	Inches⁴		Inches	
-0401	.500	.625	.050	.094	.0852	.0035	.0068	.203	.283
-0402			.063	.125	.1073	.0042	.0082	.197	.277
-0403		.750	.050	.094	.0977	.0042	.0122	.206	.353
-0404			.063	.125	.1231	.0049	.0148	.200	.346
-0501	.625	.625	.050	.094	.0916	.0050	.0069	.255	.274
-0502			.063	.125	.115	.0071	.0083	.248	.268
-0503		.750	.050	.094	.104	.0070	.0122	.259	.342
-0504			.063	.125	.131	.0084	.0148	.253	.336
-0505		1.000	.063	.125	.163	.0109	.0367	.259	.475
-0601	.750	.625	.050	.094	.0977	.0090	.0068	.304	.264
-0602			.063	.125	.123	.0110	.0082	.298	.259
-0603		.750	.050	.094	.110	.0106	.0122	.310	.333
-0604			.063	.125	.139	.0128	.0148	.304	.326
-0605		1.000	.063	.125	.170	.0165	.0367	.312	.464
-0701	.875	.625	.050	.094	.104	.0130	.0068	.353	.257
-0702			.063	.125	.131	.0158	.0083	.347	.251
-0703		.750	.050	.094	.117	.0151	.0122	.360	.323
-0704			.063	.125	.147	.0184	.0148	.354	.317
-0705			.078	.125	.177	.0214	.0175	.348	.314
-0706		.875	.050	.094	.129	.0172	.0197	.365	.391
-0707			.063	.125	.163	.0210	.0241	.359	.385
-0708			.078		.197	.0245	.0287	.353	.382
-0709		1.000	.063		.178	.0236	.0367	.364	.454
-0710			.078		.216	.0276	.0439	.358	.451
-1001	1.000	.625	.050	.094	.110	.0176	.0068	.400	.249
-1002			.063	.125	.139	.0216	.0083	.394	.244
-1003		.750	.050	.094	.123	.0205	.0121	.408	.315
-1004			.063	.125	.155	.0251	.0147	.403	.308
-1005			.078		.187	.0294	.0175	.396	.307
-1006		.875	.063		.170	.0285	.0242	.409	.377
-1007			.078		.206	.0335	.0287	.403	.373
-1008			.094		.241	.0383	.0332	.397	.369
-1009		1.000	.063		.186	.0320	.0367	.415	.444
-1010			.078		.226	.0377	.0439	.408	.441

(2) REDRAWN

APPROVED 2 Apr 43 REVISED (1) 20 Mar 45 (2) 3 Mar 82

This standard is approved for use by the Department of the Air Force and is available for use by all Department and Agencies of the Department of Defense.

P. A. Air Force - 11 Other Cust NO INTEREST	INTERNATIONAL INTEREST	TITLE ZEE - EQUAL LEG EXTRUDED	ARMY-NAVY AERONAUTICAL DESIGN STANDARD AND 10138
PROCUREMENT SPECIFICATION NONE	SUPERSEDES		SHEET 1 OF


DD FORM (MAY 73) 672-1 (LIMITED COORDINATION)

Project No. 9340-0174

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:29Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
9340

SHARP EDGES
ROUNDED .010

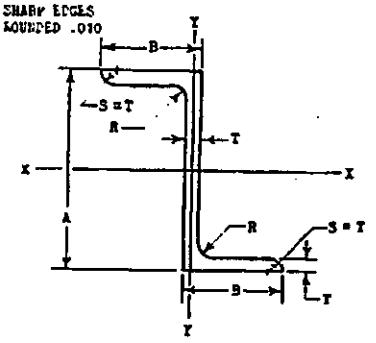

NOTES ON SYMBOLS

Ixx (and Iyy) = MOMENT OF INERTIA ABOUT XX AND YY.

ρxx (and ρyy) = RADIUS OF GYRATION ABOUT XX AND YY.

DASH NUMBER: IS DIE NUMBER AND INDICATES EACH SHAPE AND SIZE OF SECTION. EXAMPLE: IN "AND10138-1401", "10138" INDICATES "2EE-EQUAL LEG", 14 INDICATES 1-4/8" FOR DIMENSION "A" (1.500 IN COL. "A"). 01 IN 1401 IS SERIAL NUMBER ONLY.

MATERIAL SHALL BE IN ACCORDANCE WITH APPLICABLE GOVERNMENT SPECIFICATIONS.

AND 10138 DASH NO'S	NOMINAL DIMENSIONS				AREA	SECTION ELEMENTS			
	A	B	T	R		Ixx	Iyy	ρxx	ρyy
	Inches				Square Inches	Inches^4		Inch	
-1101	1.125	.625	.063	.125	.147	.0285	.0083	.441	.237
-1102		.875	.050	.094	.142	.0304	.0197	.464	.374
-1103			.063	.125	.178	.0374	.0247	.458	.368
-1104			.078		.216	.0441	.0287	.452	.364
-1105			.094		.256	.0507	.0332	.445	.361
-1106		1.125	.063		.210	.0467	.0530	.472	.503
-1107			.078		.255	.0548	.0637	.464	.500
-1108			.094		.303	.0632	.0744	.457	.496
-1201	1.250	.750	.063	.125	.170	.0421	.0148	.497	.295
-1202			.078		.206	.0497	.0175	.491	.291
-1203		1.000	.063		.202	.0532	.0366	.514	.428
-1204			.094		.292	.0729	.0511	.502	.419
-1205		1.250	.078		.284	.0765	.0887	.519	.558
-1206			.094		.338	.0886	.1039	.512	.555
-1301	1.375	.750	.063	.125	.178	.0562	.0148	.543	.288
-1302			.063		.210	.0662	.0367	.562	.418
-1303		1.000	.078		.255	.0794	.0439	.558	.415
-1304			.094		.303	.0911	.0511	.549	.411
-1305		1.250	.078		.294	.0951	.0887	.569	.549
-1306			.125		.453	.1365	.1398	.549	.527
-1401	1.500	.750	.078	.125	.226	.0765	.0175	.582	.278
-1402		1.000	.078		.265	.0961	.0439	.602	.407
-1403			.094		.314	.1116	.0511	.596	.403
-1404		1.250	.094		.361	.1349	.1040	.611	.536
-1601	1.750	.750	.078	.125	.245	.1104	.0175	.671	.267
-1602		1.000	.078		.284	.1377	.0439	.696	.393
-1603		1.250	.094		.385	.1925	.1039	.707	.520
-2001	2.000	.750	.063	.125	.218	.1272	.0148	.765	.261
-2002		1.000	.094		.361	.2194	.0511	.779	.376
-2003		1.250	.094		.408	.2621	.1040	.801	.505
-2004		1.500	.125		.594	.3852	.2346	.806	.629
-2401	2.500	.875	.063	.125	.249	.2172	.0148	.935	.244
-2402			.078		.323	.2890	.0288	.945	.298
-2403			.094		.385	.3383	.0333	.938	.294
-2404		1.000	.094		.408	.3723	.0512	.955	.354
-2405			.125		.531	.4707	.0636	.941	.346

APPROVED 2 Apr 43 — REVISED ① 20 Mar 45 — ② 3 Mar 82

This standard is approved for use by the Department of the Air Force and is available for use by all Department and Agencies of the Department of Defense.

P. A. Air Force - 11 Other Cust NO INTEREST	INTERNATIONAL INTEREST	TITLE 2EE - EQUAL LEG EXTRUDED	ARMY-NAVY AERONAUTICAL DESIGN STANDARD AND 10138
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:29Z
Check the source to verify that this is the current version before use.