INCH-POUND
MIL-DTL-22442/42A(AS)
5 January 1998
SUPERSEDING
MIL-C-22442/42
14 November 1988

DETAIL SPECIFICATION SHEET

CABLE ASSEMBLY, AIRCRAFT AUDIO, S-3A CABLE ADAPTER

This specification sheet Is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-22442 listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation

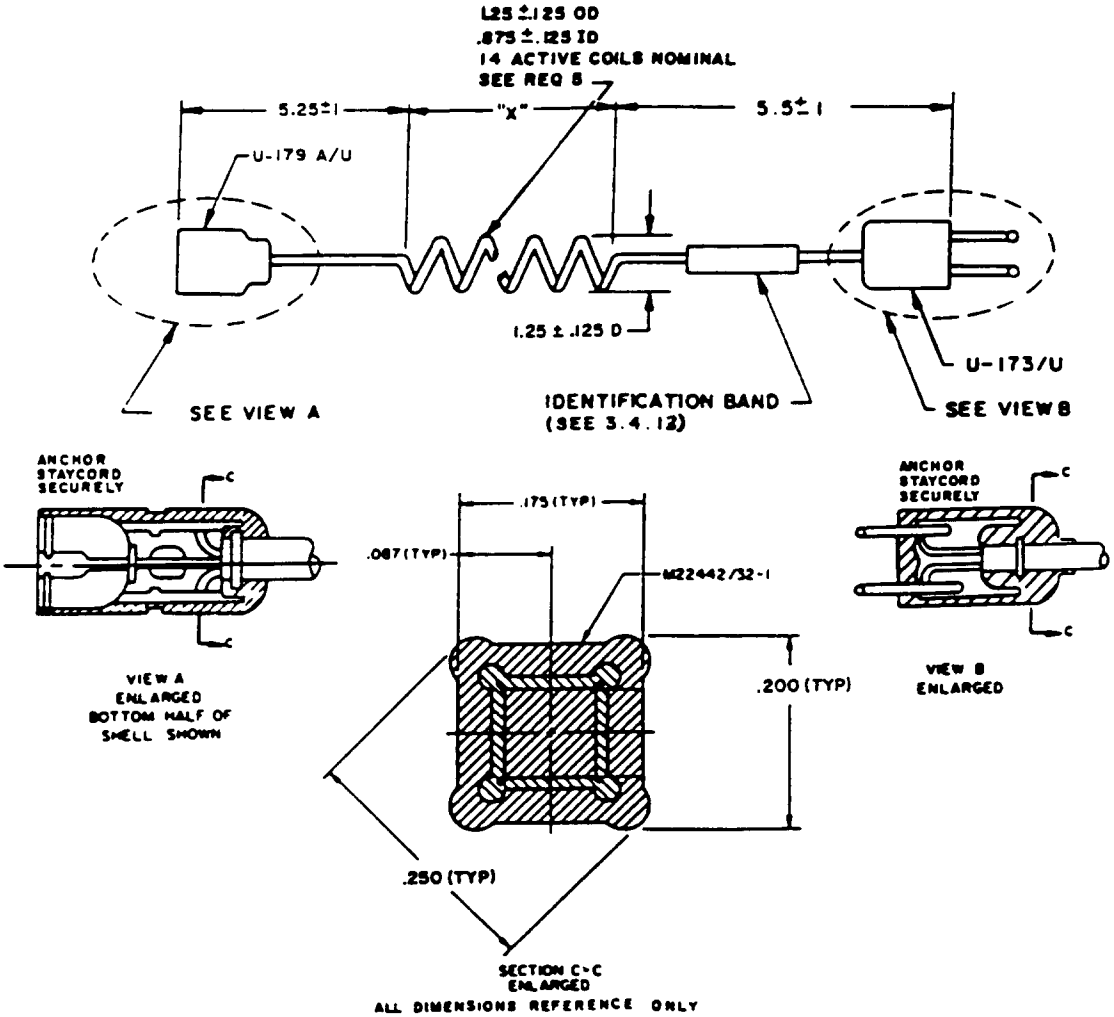

FIGURE 1. Cable assembly P/N M22442/42-1.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:35Z
Check the source to verify that this is the current version before use.

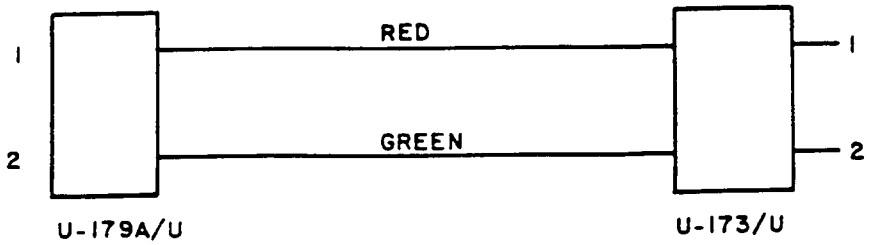

FIGURE 2. Cable assembly P/N M22442/42-l Schematic Diagram.

REQUIREMENTS:

l. The cable (cord) shall be in accordance with M22442/35-l, except that the cable shall be two conductor.

2. The weight of the cable shall not exceed 5.0 ounces.

3. The staycord shall be firmly attached to both connectors.

4. The DC resistance of the P/N M22442/42-l cable assembly shall be less than 2 ohms between the following contacts:

(a) Contact l of U-l79A/U and contact l of U-l73/U.

(b) Contact 2 of U-179A/U and contact 2 of U-l73/U.

5. The "X" dimension shall be 42.25 +3 -.5 before coiling.

6. The cable assembly shall be tested in accordance with the tests listed in Table I.

7. The U-1731U connector shall be made in accordance with Air Force drawings 57Bl2662 and 57Bl2664.

NOTES:

l. All dimensions are in inches.

2. Tolerances are metal parts ±.005, molded sections ±.05 inches unless otherwise specified.

Preparing activity:
Navy - AS
(Project No. 5995-l28-26)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:35Z
Check the source to verify that this is the current version before use.

TABLE I. Tests

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.4.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.5.2	X	X	
Soldering	3.4.18	4.5.2.1	X	X	
Continuity	3.5.1	4.5.3	X	X	
GROUP B					
Dielectric Withstanding Voltage	3.5.2	4.5.4	X		X
Pull and Twist Test 1/	3.5.4	4.5.6	X		X
Gauging	3.5.3	4.5.5	X		X
GROUP C					
Durability 1/	3.5.7	4.5.9	X		X
Ozone Resistance 1/	3.5.8	4.5.10	X		X
Jacket Elongation	3.5.9	4.5.11	X		X
GROUP D 1/					
Salt Fog	3.6.2	4.6.2	X		
Vibration	3.6.4	4.6.4	X		
Humidity	3.6.5	4.6.5	X		
Thermal Shock	3.6.5	4.6.6	X		

l/ Minimum tests for QPL retention (see paragraph 4.3.3)

.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:35Z
Check the source to verify that this is the current version before use.