# MILITARY SPECIFICATION SHEET

## CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO), CX-13165/A AH-1T & AH-1W

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442.

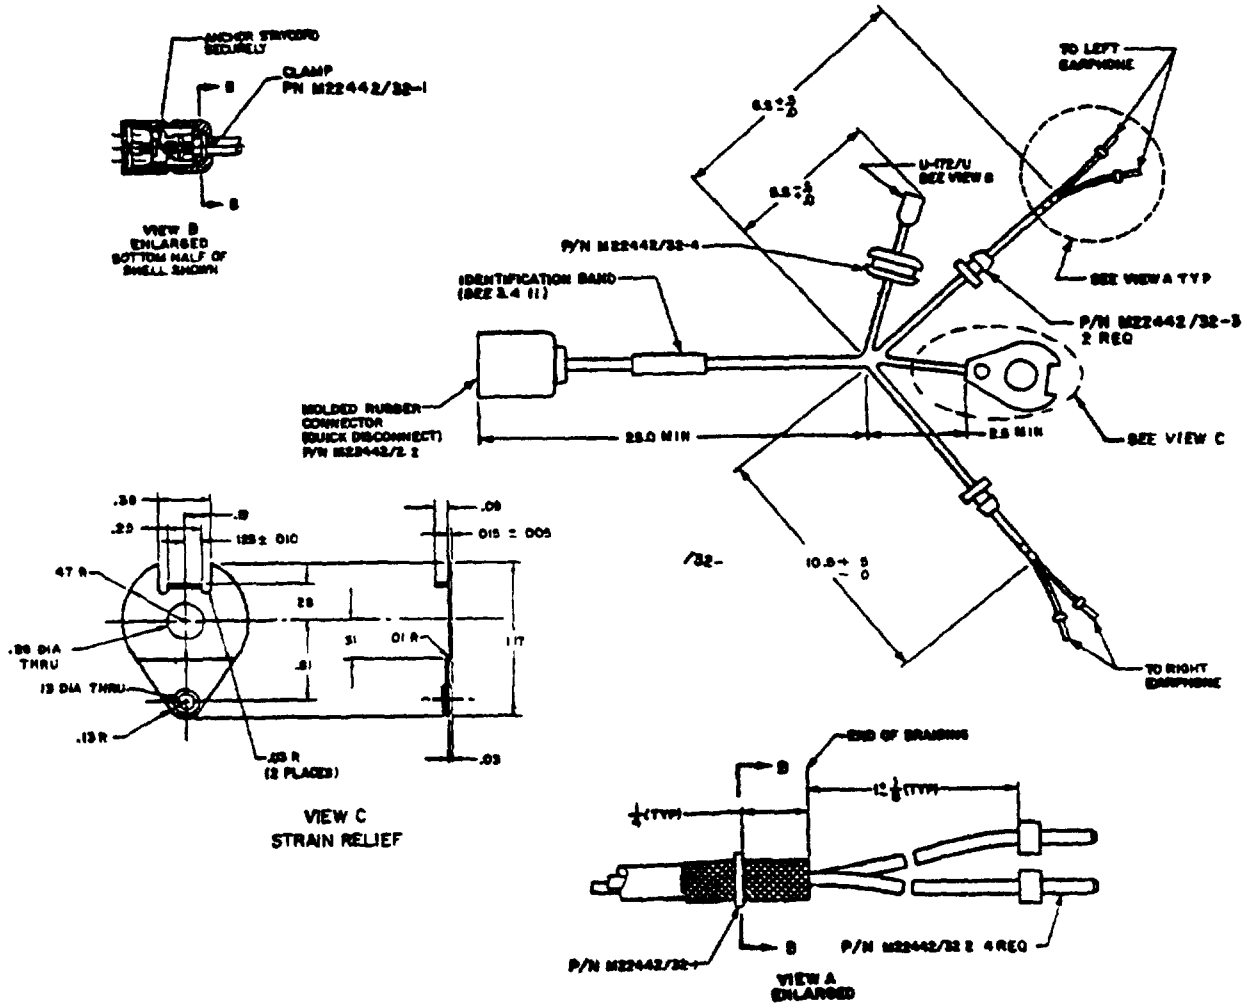



FIGURE 1. Cable assembly P/N M22442/57-1.

AMSC N/A FSC 5995

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:36Z
Check the source to verify that this is the current version before use.

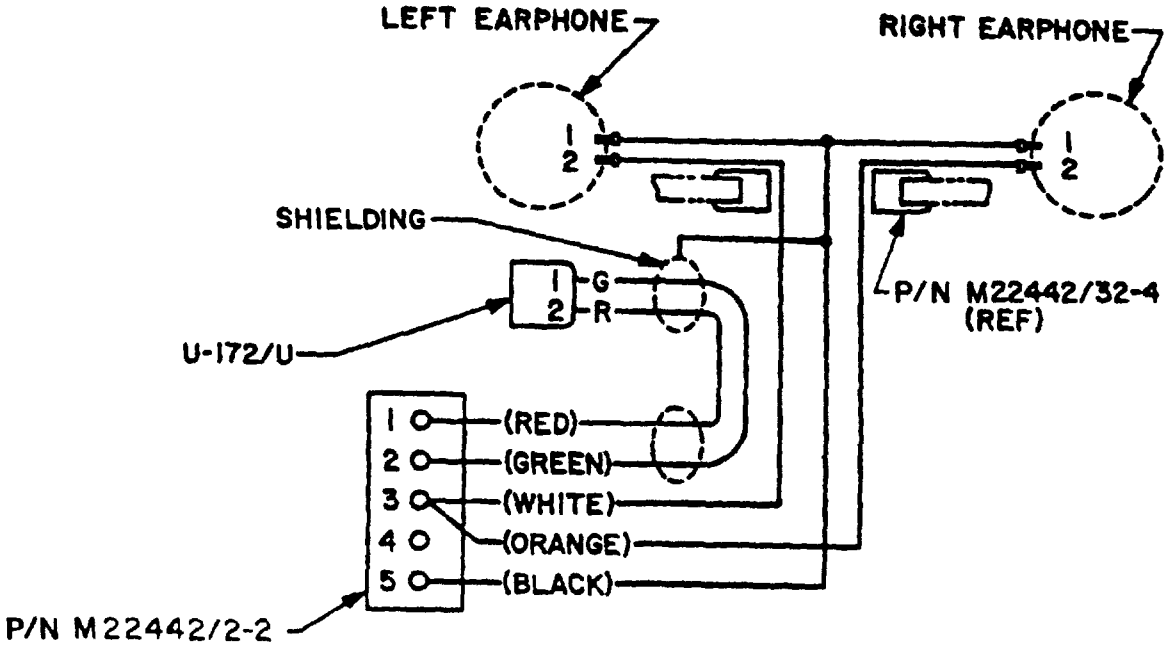



FIGURE 2. Cable assembly P/N M22442/57-1 CX-13165/A schematic diagram.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:36Z
Check the source to verify that this is the current version before use.

APPLICABLE DOCUMENTS:

| | |
|---|---|
| MIL-F-14072 | Finishes for Ground Electronic Equipment |
| QQ-S-766 | Steel Plate, Sheet, and Strip-Corrosion Resisting |

REQUIREMENTS:

1. The cable (cord) shall be in accordance with M22442/35-3.
2. The weight of the cable assembly shall not be greater than 3 ounces.
3. The staycord shall be firmly attached to the connectors and strain relief.
4. The DC resistance shall be less than 2 ohms between the following contacts:
   (a) Contact 1 of P/N M22442/2-2 and contact 2 of U-172/U.
   (b) Contact 2 of P/N M22442/2-2 and contact 1 of U-172/U.
   (c) Contact 3 of P/N M22442/2-2 and contact 2 of the left earphone contact.
   (d) Contact 3 of P/N M22442/2-2 and contact 2 of the right earphone contact.
   (e) Contact 5 of P/N M22442/2-2 and contact 1 of the left earphone contact and contact 1 of the right earphone contact.
5. The following parts shall be supplied in a plastic bag with each cable:
   (a) One P/N M22442/32-5 nut, tee.
   (b) One P/N M22442/32-6 screw, visor housing.
   (c) One P/N M22442/32-7 clip, cable.
6. The strain relief shall be made of 22 GA Cres, AISI Grade 301 in accordance with QQ-S-766, and shall be passivated in accordance with MIL-F-14072 E300.
7. The cable assembly shall be tested in accordance with the tests listed in Table I.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:36Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.

2. Tolerances are as follows:

   Metal parts ±.005
   Molded Sections ±.05

Preparing Activity:
Navy - AS
Project No. 5995-N120-47



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:36Z
Check the source to verify that this is the current version before use.

TABLE I.

| Inspection | Requirement Paragraph | Test Paragraph | Group I Qualification Tests | Group II Quality Conformance Test 100% | Group III Sample Testing Per 4.5.1 |
|---|---|---|---|---|---|
| GROUP A (ALL SAMPLE UNITS) 1/ | | | | | |
| Visual & Mechanical Inspection | 3.1 & 3.4 | 4.6.2 | X | X | |
| Soldering | 3.4.24 | 4.6.2.1 | X | X | |
| Continuity | 3.5.3 | 4.6.5 | X | X | |
| GROUP B | | | | | |
| Dielectric Withstanding Voltage | 3.5.5 | 4.6.7 | X | | X |
| Gauging 1/ | 3.5.6 | 4.6.8 | X | | X |
| Bend Relief Flexibility | 3.5.10 | 4.6.12 | X | | X |
| Durometer Hardness | 3.5.16 | 4.6.18 | X | | X |
| GROUP C | | | | | |
| Low Temperature Flexibility | 3.5.11 | 4.6.13 | X | | X |
| Durability 1/ | 3.5.13 | 4.6.15 | X | | X |
| GROUP D 1/ | | | | | |
| Temperature-Altitude 2/ | 3.6.1 | 4.7 | X | | |
| Salt Fog | 3.6.2 | 4.7 | X | | |
| Shock | 3.6.6 | 4.7 | X | | |
| Humidity | 3.6.6 | 4.7 | X | | |
| Thermal Shock | 3.6.6 | 4.7 | X | | |

1/ Minimum tests for QPL retention (see paragraph 4.4.4).
2/ Steps 3 and 12 only.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:36Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions – Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| MIL-C-22442/57(AS) | CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO), CX-13165/A AH-1T AND AH-1W |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| | ☐ VENDOR |
| b. ADDRESS *(Street, City, State, ZIP Code)* | ☐ USER |
| | ☐ MANUFACTURER |
| | ☐ OTHER *(Specify)*: |

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil – Downloaded: 2026-10-19T12:36Z
Check the source to verify that this is the current version before use.

**INSTRUCTIONS:** In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

*NOTE:* This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

*(Fold along this line)*

*(Fold along this line)*

DEPARTMENT OF THE NAVY
Commanding Officer
Naval Air Engineering Center
Systems Engineering Standardization Department
(SESD), Code 53
Lakehurst, NJ 08733

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Naval Air Engineering Center
Systems Engineering Standardization Department
(SESD). Code 53
Lakehurst, NJ 08733

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:36Z
Check the source to verify that this is the current version before use.