MILITARY SPECIFICATION

BEARING, BALL, ANNULAR, ANTIFRICTION,
ACCESSORY, HIGH SPEED, TURBINE, AIRCRAFT

This amendment forms a part of Military Specification MIL-B-83175, dated 1 May 1969, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 2

2.2: Delete "United States of America Standards Institute", its references and addresses and substitute the following:

"American National Standards Institute
AFBMA Standard 4
AFBMA Standard 10
AFBMA Standard 20
ANSI B46.1 Surface Texture (Surface Roughness, Waviness and Lay)"

(Copies of the above publications may be obtained from The American National Standards Institute, 1430 Broadway, New York, NY 10018, and The Anti-Friction Bearing Manufacturers' Association, Inc., Suite 704, 1235 Jefferson Davis Highway, Arlington, VA 22202.)

Add new paragraph: "2.3 Order of precedence. In the event of a conflict between the text of this specification and references cited herein, the text of this specification shall take precedence.

3.2: Delete "(see 6.2)" and substitute "(see 4.3.2 and 6.2)".

3.3.3, delete and substitute:

"3.3.3 The ball bearing assemblies shall be manufactured from new component parts only, and in accordance with Grade ABEC 7 of Anti-Friction Bearing Manufacturers Association Standard 20."

3.4.1: Delete "60-64" and substitute "58-62".

PAGE 3

3.4.2: Delete "Section 10" and substitute "Standard 10".

3.9: Delete.

3.11, line 3: Delete "Complete manufacturer's part number and name or trademark." and substitute "Complete manufacturer's part number (see 6.2.1) and name or trademark."

3.11, add sentence to end of paragraph: "Unassigned part numbers shall not be used."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:38Z
Check the source to verify that this is the current version before use.

PAGE 4

TABLE I: Delete and substitute new TABLE I. TABLE I forms page 3 of this admendment.

PAGE 5

TABLE III. Delete.

4.3.2: Delete "6.2" and substitute "(3.2, 3.11, and 6.2.1)".

PAGE 6

4.4.3c: Delete.

4.5.1, last two sentences: Delete.

4.5.4: Delete "USA B46.1" and substitute "ANSI B46.1".

PAGE 11

4.5.14: Delete "USA B46.1 and substitute "ANSI B46.1".


PAGE 15

6.2(b): Add "(see 6.2.1)".

6.2(d): Add "(see 3.2 and 4.3.2)".

6.2.1: Add new paragraph:

"6.2.1 Example of part number:

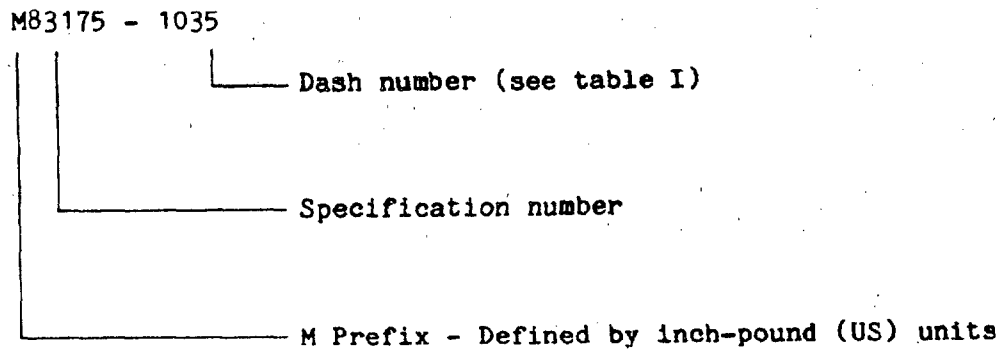

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:38Z
Check the source to verify that this is the current version before use.

TABLE I. Boundary dimensions.

Part Dash No.	Bearing bore diameter		Bearing outside diameter		Bearing ring width		Inner ring radial runout	Outer ring radial runout	Width variations of individual ring		Inner ring side runout with bore	Outside cyclindrical surface runout with side	Inner ring raceway runout with side	Outer ring raceway runout with side
									Inner	Outer				
	Mm	Inches	Mm	Inches	Mm	Inches	Inches Max	Inches Max	Inches Max	Inches Max	Inches Max	Inches Max	Inches Max	Inches Max
1022	10	.3937	22	.8661	6	.2362	.0001	.00015	.0001	.0001	.0001	.00015	.0001	.0002
1026	10	.3937	26	1.0236	8	.3150								
1030	10	.3937	30	1.1811	9	.3543								
1035	10	.3937	35	1.3780	11	.4331								
1224	12	.4724	24	.9449	6	.2362	.0001	.00015	.0001	.0001	.0001	.00015	.0001	.0002
1228	12	.4724	28	1.1024	8	.3150								
1232	12	.4724	32	1.2598	10	.3937								
1237	12	.4724	37	1.4567	12	.4724								
1528	15	.5906	28	1.1024	7	.2756	.0001	.00015	.0001	.0001	.0001	.00015	.0001	.0002
1532	15	.5906	32	1.2598	9	.3543								
1535	15	.5906	35	1.3780	11	.4331								
1542	15	.5906	42	1.6535	13	.5118								
1730	17	.6693	30	1.1811	7	.2756	.0001	.00015	.0001	.0001	.0001	.00015	.0001	.0002
1735	17	.6693	35	1.3780	10	.3937								
1740	17	.6693	40	1.5748	12	.4724								
1747	17	.6693	47	1.8504	14	.5512								
2037	20	.7874	37	1.4567	9	.3543	.0001	.00015	.0001	.0001	.00015	.00015	.00015	.0002
2042	20	.7874	42	1.6535	12	.4724								
2047	20	.7874	47	1.8504	14	.5512								
2052	20	.7874	52	2.0472	15	.5906								
2542	25	.9843	42	1.6535	9	.3543	.0001	.00015	.0001	.0001	.00015	.00015	.00015	.0002
2547	25	.9843	47	1.8504	12	.4724								
2552	25	.9843	52	2.0472	15	.5906								
2562	25	.9843	62	2.4409	17	.6693								
3047	30	1.1811	47	1.8504	9	.3543	.0001	.00015	.0001	.0001	.00015	.00015	.00015	.0002
3055	30	1.1811	55	2.1654	13	.5118								
3062	30	1.1811	62	2.4409	16	.6299								
3072	30	1.1811	72	2.8346	19	.7480								
3555	35	1.3780	55	2.1654	10	.3937	.00015	.0002	.0001	.0001	.00015	.00015	.00015	.0002
3562	35	1.3780	62	2.4409	14	.5512								
3572	35	1.3780	72	2.8346	17	.6693								
3580	35	1.3780	80	3.1496	21	.8268								
4062	40	1.5748	62	2.4409	12	.4724	.00015	.0002	.0001	.0001	.00015	.00015	.00015	.0002
4068	40	1.5748	68	2.6772	15	.5906								
4080	40	1.5748	80	3.1496	18	.7087								
4090	40	1.5748	90	3.5433	23	.9055								

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:38Z
Check the source to verify that this is the current version before use.

MIL-B-83175
AMENDMENT 1

6.4: Delete.

Custodians:
Army - AV
Navy - SH
Air Force -11

Reviewer activities:
Army - AV
Navy - SH
Air Force - 71, 82, 99

User activities:
Navy - AS

Preparing activity:
Air Force - 11

Project No. 3110-0725

☆U.S. GOVERNMENT PRINTING OFFICE: 1985 — 505-038/23125

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:38Z
Check the source to verify that this is the current version before use.