

MILITARY SPECIFICATION SHEET

TRANSFORMER, POWER, STEPDOWN, TF4RO3AG890

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The complete requirements for procuring the transformer described herein shall consist of this document and the latest issue of Specification MIL-T-27.

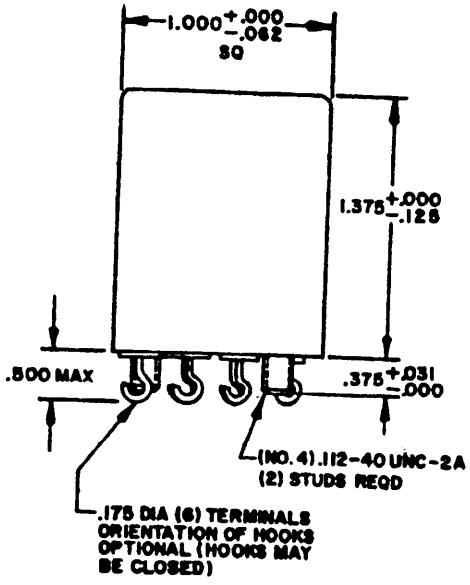



CIRCUIT DIAGRAM

INCHES	MM
1.000	25.40
1.375	34.93

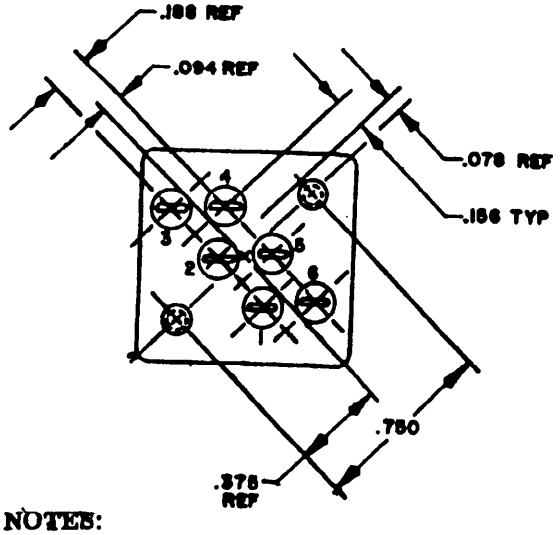

NOTES:

1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.016 (.41 mm).
4. Marking shall be on sides and/or top of case.

(A) denotes changes

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:26Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, i.e., (1-2) are used, they indicate the extreme terminals of the winding.)

Electrical ratings:
  Primary voltage (1-2): 115 Vrms, 400 Hz.
  Secondary voltage:
    (3-4): 3 Vrms, 6 mA.
    (5-6): 3 Vrms, 6 mA.
  Working voltage: 185 V.

Design and construction:
  Dimensions and configuration: See figure.
  Duty cycle: Continuous.
  Case: Metal enclosed.
    Material: Metal.
  Terminals: Wire hook.
    Height: 0.500 inch maximum.
  Weight: 0.2 pound.
  Operating temperature range: -55° to 105°C.

Terminal strength: MIL-STD-202, method 211, test condition A, 2 pounds.

Dielectric withstanding voltage (at sea level): 518 Vrms.

Electrical characteristics:
  No load: With 115 V and 400 Hz in (1-2):
    Current in (1-2): 1.5 mA maximum.
(A) Voltage across (3-4): 3.15 V ± 5%
(A) Voltage across (5-6): 3.15 V ± 5%
  Rated load: With 115 V and 400 Hz (1-2):
    Voltage across (3-4): 3 V ±5%.
    Voltage across (5-6): 3 V ±5%.
  Electrostatic shielding: Voltage ratio, 5:1 minimum at 20 kHz.
  DC resistance:
    (1-2): 1200 ohms maximum.
    (3-4): 20 ohms maximum.
    (5-6): 20 ohms maximum.
  Polarity: Additive, with terminals (2-3) and (4-5) connected.

Marking location: See figure.

Part number: M27/73-01.

Custodians:
  Army - EL
  Navy - EC
  Air Force - 85

Review activities:
  Army - EL, MI, SG
  Navy - EC, SH, OS
  Air Force - 11, 17, 99
  DSA - ES

User activities:
  Army - MU, WC, ME
  Navy - MC, AS, SH, OS
  Air Force - 19

Preparing activity:
  Army - EL

Agent:
  DSA - ES

(Project 5950-0528)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:26Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-T-27773A TRANSFORMER, POWER, STEPDOWN, TF4R03AG890

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

ESC-FM 1068-68

To detach this form cut along this line

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:26Z
Check the source to verify that this is the current version before use.