
FED. SUP CLASS
2330

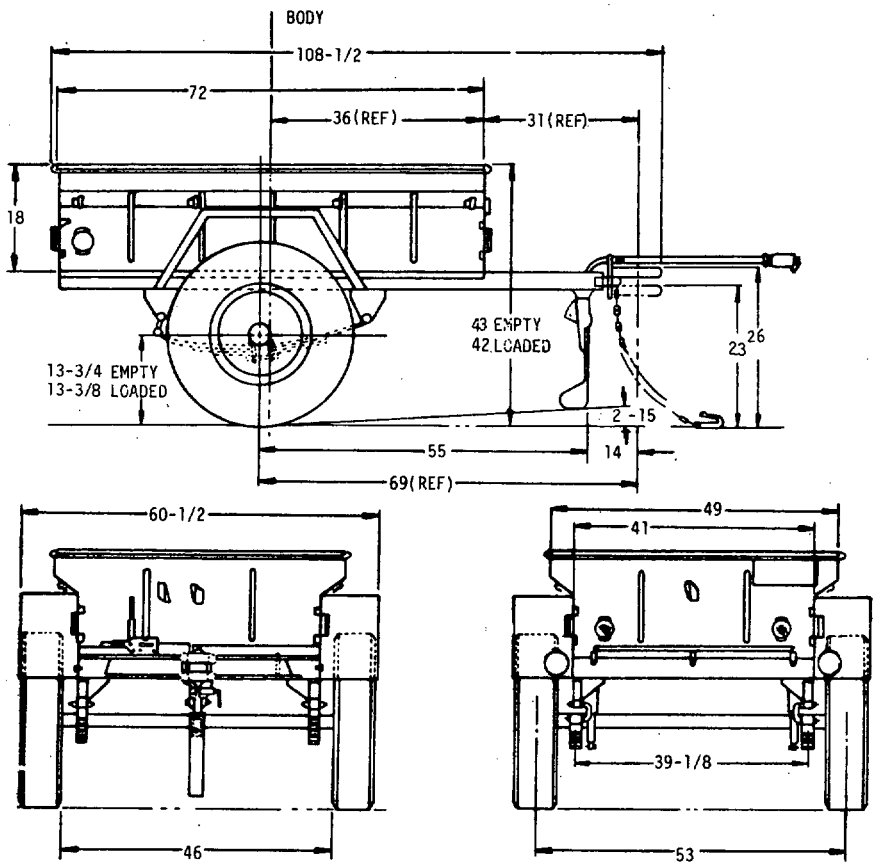

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distrubution is unlimited.

APPROVED 20 OCTOBER 1966 REVISED (D) 13 MAR 85

(D) ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING DWG NO.
MS500069-1	8736302

P. A. ARMY-AT	INTERNATIONAL INTEREST	TITLE
Other Cust		TRAILER, CARGO: 1/4 TON, 2 WHEEL, MILITARY MODEL M416

MILITARY STANDARD

MS500069(AT)

PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 1 OF 2
MIL-T-10579		

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION PREVIOUS EDITIONS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:40Z
Check the source to verify that this is the current version before use.

95%

USER ACTIVITIES:
REVIEWER ACTIVITIES:
This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release: distribution is unlimited.

FED. SUP CLASS
2330

VEHICLE CHARACTERISTICS

CURB WEIGHT: 570 LBS.

WEIGHT DISTRIBUTION:

WEIGHTS	EMPTY	LOADED
PAYLOAD	-	500
WHEELS	482	960
LDG. LEG	88	110
TOTAL	570 LBS.	1070 LBS.

(REFERENCED WEIGHTS ARE FOR INFORMATION ONLY.)

CHASSIS TRAILER: M569-MS53027

FORDING DEPTH: SUBMERSIBLE FOR 15 MINUTES

BODY ASSEMBLY: 10924559
NOTE: BODY IS DETACHABLE FROM CHASSIS.

FENDERS: CARGO TRAILER 10924564

LUNETTE & BRACKET ASSY: 1092456
LANDING LEG 7343007

ANCHOR, LUNETTE & BRACKET: 10924579
LUNETTE (REF) 7328311

DRAW BAR: CHASSIS
CHANNEL ASSY-L.H. 10924587-1
CHANNEL ASSY-R.H. 10924587-2

FRAME ASSY: CHASSIS 10924570
CROSSMEMBERS, 5
SIDE RAIL-CHANNEL
3-11/32 X 1-3/4 X #13 GA., .0897
SECTION MODULUS .667 IN^3

SUSPENSION: INST'N 10924574
AXLE: MS35865-01 10924598
CAPACITY 2500 LBS.
SPRINGS: SEMI-ELLIPTICAL 7328358
1-3/4 WIDE X 36-1/4 LONG, 10 LEAVES

BRAKES: SERVICE, NONE

BRAKES: CONTROL INST'N 10924574
BRAKE ASSY. L.H. 8678952
BRAKE ASSY. R.H. 8678953
BRAKE SIZE 9 X 2 INCHES

HUB & DRUM ASSY: L.H. & R.H. 10924600

ELECTRICAL: INST'N 10924550
POTENTIAL, 24 VOLTS
HARNESS ASSY 10924552
CABLE ASSY-INTERVEHICULAR 8722864
TAILLIGHT, COMPOSITE 11614157

REFLECTORS:
TRAILER BODY: RED, FOUR, MS35387-1

TIE DOWNS: FOUR, 7328275

MAXIMUM TOWING SPEED:
LOADED 30 MPH
HIGHWAY 50 MPH

ADDITIONAL EQUIPMENT AVAILABLE:
TARPAULIN CARGO BODY 10913205
SAFETY CHAIN ASSY, TWO 10944739
SAFETY CHAIN ASSY, TWO 10942505

SHOCK ABSORBERS: TWO, 7697442
DOUBLE ACTING, HYDRAULIC

WHEELS: SINGLE 10921860
SIZE: 16 X 4-1/2, 2-5/16 OFFSET

TIRES: 7.00 X 16LW, 6 PLY, MIL-T-46729
OR MIL-T-12459 TREAD DESIGN, NDCC
TUBE, ZZ-I-550

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

APPROVED 20 OCTOBER 1966 REVISED (D) 13 MAR 85

(D) ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING DWG NO
MS500069-1	8736302

P. A. ARMY-AT	INTERNATIONAL INTEREST	TITLE
Other Cust		TRAILER, CARGO: 1/4 TON, 2 WHEEL, MILITARY MODEL M416

MILITARY STANDARD
MS500069(AT)

PROCUREMENT SPECIFICATION: MIL-T-10579
SUPERSEDES:
SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T20:46Z
Check the source to verify that this is the current version before use.