MILITARY STANDARD

MIL-STD-1323-389
(NAVY)

19 MAY 1993

UNIT LOAD
FOR UNDERWAY REPLENISHMENT
GUIDANCE CONTROL UNIT:
WGU-39/B, F/LASER GUIDED BOMBS
IN CONTAINER, CNU-371/E


UNIT LOAD DATA

NUMBER OF CONTROL UNITS PER CONTAINER	1
NUMBER OF CONTAINERS PER UNIT LOAD	9
GROSS WEIGHT OF ONE CONTAINER (LBS)	143.5
GROSS WEIGHT OF STEEL PALLET (LBS)	94
WEIGHT OF WOOD BATTENS (LBS)	8
WEIGHT OF STEEL STRAPPING (LBS)	8.5
GROSS WEIGHT OF UNIT LOAD (LBS)	1400 △
CUBE (CU FT)	49.3


FOR HAZARD CLASSIFICATION SEE SW020-AC-SAF-010/020/030

△ DO NOT USE FOR SHIPPING WEIGHT

DO NOT STACK MORE THAN 4 UNIT LOADS HIGH IN STORAGE.

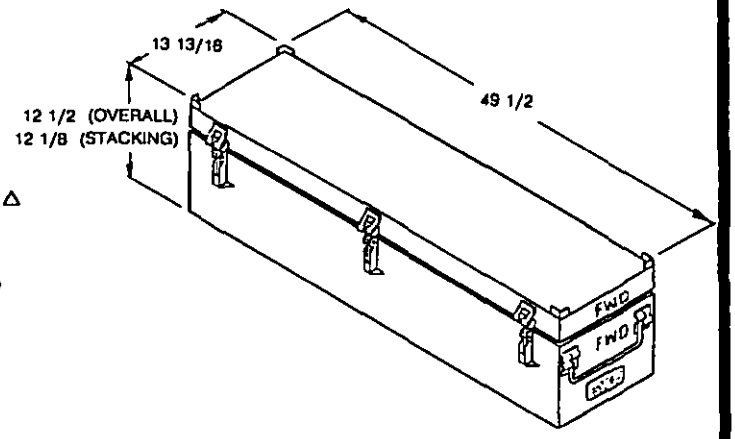

CONTAINER, CNU-371/E
DWG. 793500

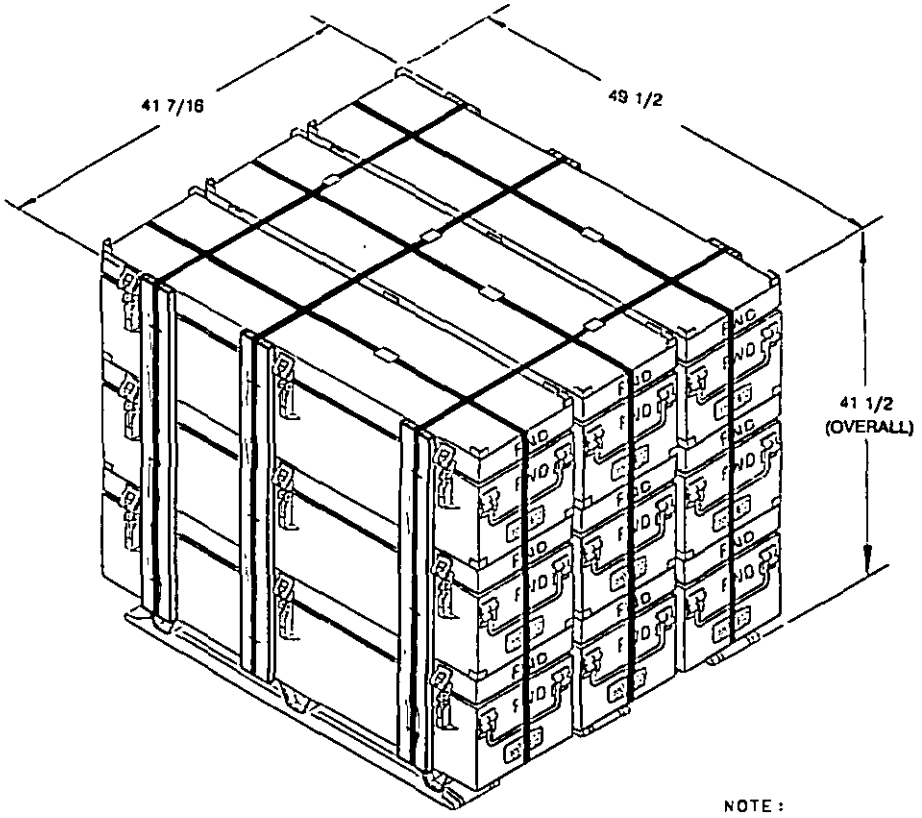

TEST REPORT NUMBER 83057

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

NOTE:
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
			APPROVAL	

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING, STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

SIGNATURE TDA, WPNSTA EARLE DATE

SIGNATURE AIRSYSCOM BY DIRECTION DATE

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY).

ORIGINATOR DATE

WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2025-10-24T00:00Z
Check the source to verify that this is the current version before use.

PALLETIZING PROCEDURE

(A) THREAD LONGITUDINAL STRAPS, ITEM 2, BETWEEN 4th AND 5th DECK WIRES (2 PLACES) AND 11th AND 12th DECK WIRES OF PALLET, ITEM 1, AS SHOWN IN DETAIL A.

(B) POSITION CONTAINERS ON PALLET WITH EQUAL OVERHANG ON BOTH SIDES AND BOTH ENDS. BE SURE THAT THE LATCHES OF THE CONTAINER FOR EACH ROW ARE BUTTED AGAINST EACH OTHER.

(C) POSITION LATERAL STRAPS, ITEM 3, UNDER THE PALLET DECK, AROUND THE VERTICAL BATTENS, ITEM 5, AND OVER THE UNIT LOAD AT LOCATIONS AS SHOWN. TENSION AND DOUBLE NOTCH SEAL, ITEM 4. BE SURE TO SECURE THE TWO OUTBOARD STRAPS FIRST THEN THE CENTER STRAP.

(D) POSITION LONGITUDINAL STRAPS, ITEM 2, OVER THE UNIT LOAD. TENSION AND DOUBLE NOTCH SEAL, ITEM 4.


(E) SECURE STRAPS TO VERTICAL BATTENS WITH STAPLES, ITEM 6, AS SHOWN.


MARKING:

IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-129 (NAVY).

DEPALLETIZING PROCEDURE

(A) REMOVE STAPLES.
(B) CUT AND REMOVE STRAPS AND BATTENS.
(C) REMOVE CONTAINERS.

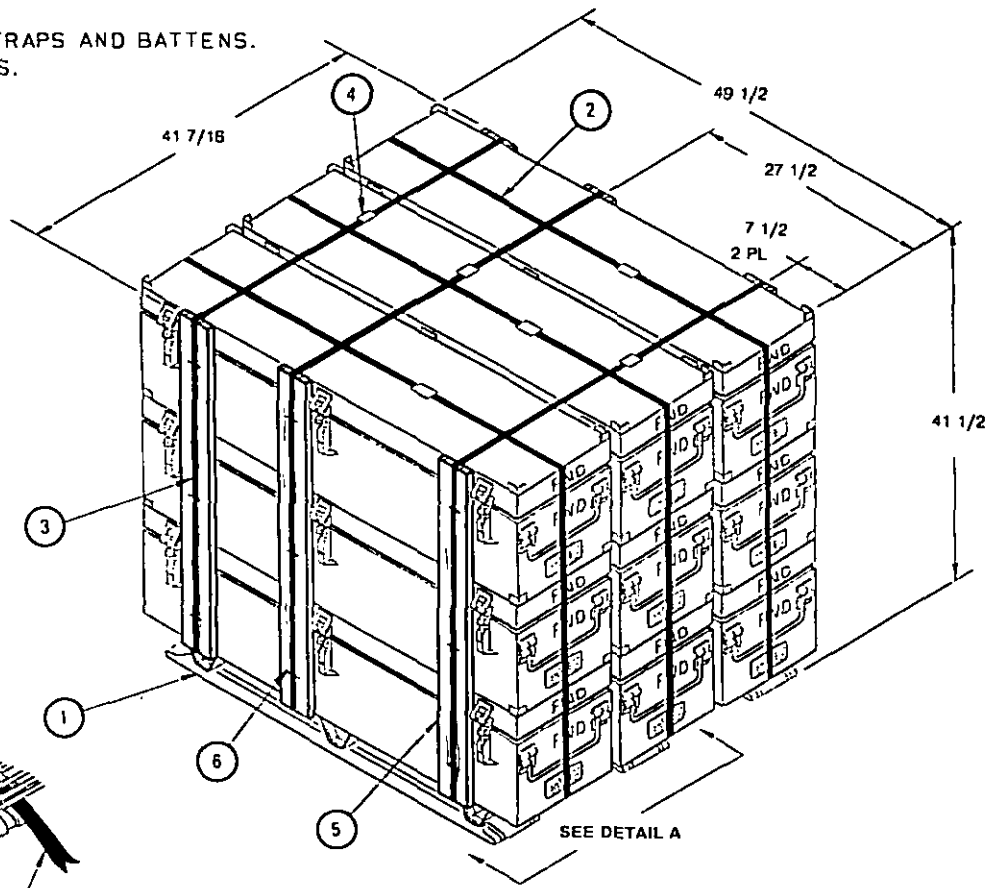

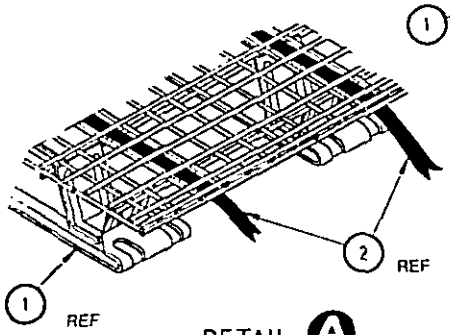

DETAIL A

NOTES:

ALL MATERIALS SHALL BE IN ACCORDANCE WITH THE GENERAL DOCUMENT, MIL-STD-1323 (NAVY).

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
18	6	STAPLES	STEEL	3/4
6	5	BATTEN, VERTICAL	WOOD	1 X 4 X 36 3/8
6	4	SEAL	STEEL	3/4
3	3	LATERAL STRAP	STEEL	3/4 X .035 X 14 1/2 FT
3	2	LONGITUDINAL STRAP	STEEL	3/4 X .035 X 16 FT
1	1	PALLET, MK 3 MOD 0	564200	40 X 48 X 4 3/4

LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:00Z
Check the source to verify that this is the current version before use.