
FED. SUP'CLASS
2630

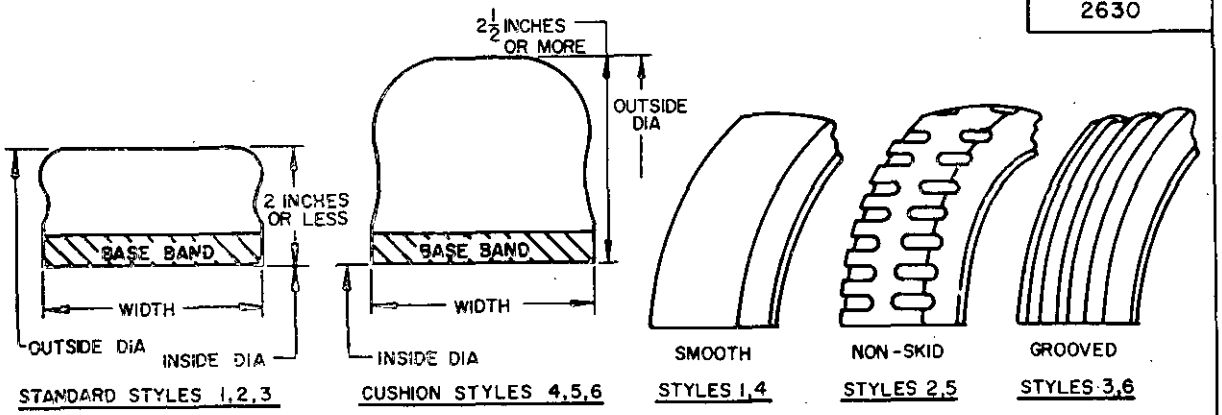

STANDARD STYLES 1,2,3 — CUSHION STYLES 4,5,6 — STYLES 1,4 — STYLES 2,5 — STYLES 3,6

TIRE CROSS SECTION — TYPICAL TIRE TREAD PATTERNS

STANDARD SOLID TIRES

SIZE	$8\frac{1}{2}$X4X4	9X5X5	10X6X$6\frac{1}{4}$	10X7X$6\frac{1}{4}$	10X5X$6\frac{1}{2}$	$10\frac{1}{2}$X7X$6\frac{1}{2}$
TYPE (2)	II	II	II	II	II	II
STYLE (2)	1	1	1	1	1	1
MAX. LOAD LBS	1100	1510	2020	2420	1630	2510
MS DASH NO.	-22	-1	-36	-42	-31	-43

SIZE	12X4$\frac{1}{2}$X8	15X5X11$\frac{1}{4}$	15X6X11$\frac{1}{4}$	15X7X11$\frac{1}{4}$	15X8X11$\frac{1}{4}$	17X7X12$\frac{1}{8}$
TYPE (2)	II	II	II	II	II	II
STYLE (2)	1	1	1	1	1	1
MAX. LOAD LBS	1640	2210	2740	3280	3810	3770
MS DASH NO.	-27	-33	-38	-44	-47	-45

SIZE	20X6X16	20X8X16	22X12X16			
TYPE (2)	II	II	II			
STYLE (2)	1	1	2			
MAX. LOAD LBS	3410	4730	8860			
MS DASH NO.	-40	-48	-54			

NOTES:

1. THE TABULATED TIRE SIZES SHOWN ARE IN INCHES, AND INDICATE THE FOLLOWING: OUTSIDE DIAMETER, TREAD BASE WIDTH, AND INSIDE DIAMETER, RESPECTIVELY. EXAMPLE: MS DASH NO. 40 INDICATES 20 INCHES OUTSIDE TIRE DIAMETER BY 6 INCHES BASE WIDTH BY 16 INCHES INSIDE BASE DIAMETER.
2. TIRE TYPE AND STYLE DESIGNATIONS CONFORM TO THE PROCUREMENT SPECIFICATION.
3. MAXIMUM SPEED AT INDICATED LOAD SHALL BE 10 MPH, WHERE SPEEDS OF 10-22 MPH ARE ENCOUNTERED, MAXIMUM LOAD SHALL BE 20% LESS THAN INDICATED LOAD. MAXIMUM SPEED AT REDUCED LOAD SHALL BE 22 MPH.
4. THE TIRE PART NUMBER CONSISTS OF THE MS NUMBER AND THE MS DASH NUMBER. EXAMPLE: MS 35393-36.
5. REFERENCED SPECIFICATION SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

Ⓓ CANCELLED AFTER 6 MARCH 1973
USE LATEST PROCUREMENT SPECIFICATION

REVIEW ACTIVITIES: ARMY-MI
USER ACTIVITIES: ARMY-AT; NAVY-MC, AS

APPROVED 28 DECEMBER 1955 REVISED Ⓐ 7 APRIL 1958 Ⓑ 6 DECEMBER 1960 Ⓒ 9 FEBRUARY 1967 Ⓓ 6 MARCH 1973

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY-AT Other Cust NAVY-YD AF-84	TITLE TIRE, SOLID RUBBER: STANDARD AND CUSHION, INDUSTRIAL	MILITARY STANDARD MS 35393
PROCUREMENT SPECIFICATION ZZ-T-391	SUPERSEDES:	SHEET 1 OF 3

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:22Z
Check the source to verify that this is the current version before use.

CUSHION SOLID TIRES

SIZE	$10\frac{1}{2}$X5X5	$10\frac{1}{2}$X6X5	$13X3\frac{1}{2}X8$	$13X4\frac{1}{2}X8$	$14X4\frac{1}{2}X8$	$15\frac{1}{2}$X5X10
TYPE (2)	II	II	II	II	II	II
STYLE (2)	5	5	4	5	5	4
MAX. LOAD LBS	1730	2200	1240	1770	1840	2310
MS DASH NO.	-5	-69	-60	-4	-62	-66

SIZE	$15\frac{1}{2}$X6X10	$16X5X10\frac{1}{2}$	$16X6X10\frac{1}{2}$	$16\frac{1}{4}X4X11\frac{1}{4}$	$16\frac{1}{4}X5X11\frac{1}{4}$	$16\frac{1}{4}X6X11\frac{1}{4}$
TYPE (2)	II	II	II	II	II	II
STYLE (2)	5	5	5	5	5	5
MAX. LOAD LBS	2960	2370	3030	1780	2400	3020
MS DASH NO.	-8	-81	-82	-61	-6	-9

SIZE	$16\frac{1}{4}X7X11\frac{1}{4}$	$17X4\frac{1}{2}X12\frac{1}{8}$	$18X5X12\frac{1}{8}$	$18X7X12\frac{1}{8}$	$18X8X12\frac{1}{8}$	$18X9X12\frac{1}{8}$
TYPE (2)	II	II	II	II	II	II
STYLE (2)	5	5	5	4.5	5	5
MAX. LOAD LBS	3640	2160	2590	4020	4740	5460
MS DASH NO.	-72	-63	-83	-73	-76	-84

SIZE	21X5X15	21X6X15	21X7X15	21X8X15	22X5X16	22X6X16
TYPE (2)	II	II	II	II	II	II
STYLE (2)	4	5	5	5	5	5
MAX. LOAD LBS	2900	3710	4520	5320	3010	3840
MS DASH NO.	-67	-11	-12	-13	-86	-70

SIZE	22X7X16	22X8X16	22X9X16			
TYPE (2)	II	II	II			
STYLE (2)	5	5	5			
MAX. LOAD LBS	4680	5510	6350			
MS DASH NO.	-74	-77	-79			

REVIEW ACTIVITIES: ARMY-ME
USER ACTIVITIES: ARMY-AT; NAVY-MC, AS

APPROVED 28 DECEMBER 1955 REVISED (D) FOR CHANGE SEE SHEET 1

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY-AT
Other Cust
NAVY-YD
AF-84

PROCUREMENT SPECIFICATION
ZZ-T-391

TITLE
TIRE, SOLID RUBBER: STANDARD AND CUSHION, INDUSTRIAL

SUPERSEDES:

MILITARY STANDARD
MS 35393

SHEET 2

DD FORM 672-1 (Coordinated)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:22Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2630

REVIEW ACTIVITIES: ARMY - ME
USER ACTIVITIES: ARMY - AT; NAVY - MC, AS

APPROVED 28 DECEMBER 1955 REVISED (D) FOR CHANGE SEE SHEET 1

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

STANDARD SOLID TIRES

SIZE	10X3X6 1/4	10 1/2 X5X6 1/2	10 1/2 X6X6 1/2	11X2 1/2 X8	12X3 1/2 X8	12X4X8	14X4X10	15X3X11 1/4
TYPE (2)	II	II	II	II	II	II	II	II
STYLE (2)	1	1	1	1	1	1	1	1
MAX. LOAD LBS	840	1690	2100	710	1190	1420	1600	1140
MS DASH NO.	-15	-32	-37	-14	-18	-23	-87	-16

SIZE	15X3 1/2 X11 1/4	15X9X11 1/4	15X10X11 1/4	16X3X12 1/8	16X3 1/2 X12	16X3 1/2 X12 1/8	16X4X12 1/8	17X5X12 1/8
TYPE (2)	II	II	II	II	II	II	II	II
STYLE (2)	1	1	1	1	1	1	1	1
MAX. LOAD LBS	1410	4350	4880	1200	1480	1480	1760	2480
MS DASH NO.	-19	-50	-52	-17	-88	-20	-24	-34

SIZE	17X6X12 1/8	18X5X14	20X3 1/2 X16	20X4X16	20X5X16	20X7X16	20X9X16	22X10X16
TYPE (2)	II	II	II	II	II	II	II	II
STYLE (2)	1	1	1	1	1	1	1	LUG
MAX. LOAD LBS	3120	2500	1750	2080	2740	4070	5390	7180
MS DASH NO.	-39	-89	-90	-25	-35	-2	-51	-3

SIZE	22X14X16	22X16X16	22X3 1/2 X17 3/4	22X4X17 3/4	22X4 1/2 X17 3/4	22X6X17 3/4	22X7X17 3/4	22X8X17 3/4
TYPE (2)	II	II	II	II	II	II	II	II
STYLE (2)	LUG	LUG	1	1	1	1	1	1
MAX. LOAD LBS	10530	12200	1880	2230	2590	3660	4370	5080
MS DASH NO.	-56	-58	-21	-26	-29	-41	-46	-49

SIZE	22X10X17 3/4	28X7X23 1/2	36X10X30	36X12X30	36X14X30	36X16X30		
TYPE (2)	II	II	II	II	II	II		
STYLE (2)	1	1	1	LUG	1	LUG		
MAX. LOAD LBS	6510	5470	10400	12810	15230	17650		
MS DASH NO.	-53	-91	-92	-55	-57	-59		

CUSHION SOLID TIRES

SIZE	9 1/2 X5X4	17 3/4 X5X12 1/8	17 3/4 X6X12 1/8	22X5X16	22 3/4 X6X17 3/4	23 3/4 X8X17 3/4	26X7X20	
TYPE (2)	II	II	II	II	II	II	II	
STYLE (2)	5	5	5	5	4	5	5	
MAX. LOAD LBS	1600	2560	3270	3010	4070	5840	5290	
MS DASH NO.	-65	-7	-10	-68	-71	-78	-75	

ALL ITEMS ON THIS SHEET ARE INACTIVE FOR NEW DESIGN

AUTHORIZED FOR PROCUREMENT ONLY FOR SUPPORT OF IN-SERVICE MATERIAL

P.A. ARMY-AT Other Cust NAVY-YD AF-84	TITLE TIRE, SOLID RUBBER: STANDARD AND CUSHION, INDUSTRIAL	MILITARY STANDARD MS 35393
PROCUREMENT SPECIFICATION ZZ-T-391	SUPERSEDES:	SHEET 3

DD FORM 1 SEP 57 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:22Z
Check the source to verify that this is the current version before use.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1973-714-543/4441

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MS35393

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

515

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:22Z
Check the source to verify that this is the current version before use.