
FED SUP CLASS
3030

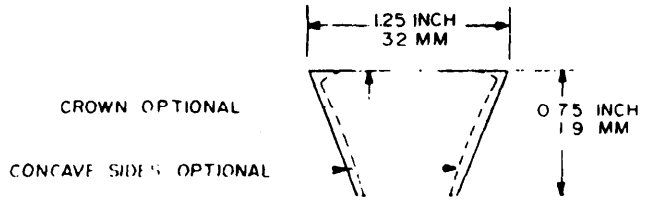

BELT CROSS SECTION, NOMINAL

EFFECTIVE LENGTHS-INCHES

DASH NUMBER	PITCH LENGTHS	TOLERANCE PITCH LENGTH (PLUS OR MINUS)	MATCHING LIMITS FOR ONE SET
-D120	123 3	0 8	0.30
-D128	131 3	0 8	0 30
-D144	147 3	0 8	0 30
-D158	161 3	1 0	0 45
-D173	176 3	1.0	0 45
-D180	183 3	1 0	0 45
-D195	198 3	1 1	0 45
-D210	213 3	1 1	0 45
-D240	240 8	1 3	0 45
-D270	270 8	1 6	0 60
-D300	300 8	1 6	0 60
-D330	330 8	2 0	0 60
-D360	360 8	2 0	0 60
-D390	390 8	2 0	0 75
-D420	420 8	3 3	0 75
-D480	480 8	3 3	0 75
-D540	540 8	3 3	0 90
-D600	600 8	3 3	0 90
-D660	660 8	3 3	0 90

EFFECTIVE LENGTHS-MILLIMETERS

DASH NUMBER	EFFECTIVE LENGTH	TOLERANCE EFFECTIVE LENGTH (PLUS OR MINUS)	MATCHING LIMITS FOR ONE SE
-32C3190	3190	2 0	1 0
32C3390	3390	2 0	1 0
-32C3800	3800	2 5	1 0
-32C4160	4160	2 5	1 0
-32C4250	4250	2 5	1 0
-32C4540	4540	2 5	1 0
-32C4720	4720	2 5	1 0
-32C5100	5100	3 0	1 0
-32C5480	5480	3 0	1 0
-32C5800	5800	3 0	1 0
-32C6180	6180	3 0	1 6
-32C6560	6560	4 0	1 6
-32C6940	6940	4 0	1 6
-32C7330	7330	4 0	1 6
-32C8090	8090	4 0	1 6
32C8470	8470	4 0	1 6
-32C8850	8850	4 0	1 6
-32C9240	9240	6 0	1 6
32C10000	10000	6 0	1 6
-32C10760	10760	6 0	1 6
-32C11530	11530	8 0	1 6
32C12290	12290	8 0	2 4

ENTIRE STANDARD REVISED

APPROVED 20 MAY 1965 REVISED (A) NOVEMBER 1967 (B) 22 JUNE 1981

REVIEW ACTIVITIES AV, CS, ML
USER ACTIVITES:

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

P A	ME	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust	YD 99		BELT, "V" INDUSTRIAL (MULTIPLE DRIVE) "D" AND "32C" CROSS SECTION.	MS39258
PROCUREMENT SPECIFICATION ZZ-B-225		SUPERSEDES		SHEET 1 OF 2

DD FORM 672-1

3030-0129

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:50Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
3030

NOTES:

1. DIMENSIONS ARE IN INCHES AND MILLIMETERS (MM).
2. TO ORDER REQUIRED BELT SIZE SPECIFY ONLY ONE DASH NUMBER, EITHER -D SERIES FOR INCH MEASUREMENT OR -32C SERIES FOR MILLIMETER MEASUREMENT.
3. THE MILLIMETER UNITS CHOSEN FOR THIS STANDARD ARE NOT ALWAYS AN EXACT ARITHMETIC CONVERSION OF THE CORRESPONDING INCH UNITS.
4. THE DASH NUMBERS CORRESPOND TO INDUSTRY STANDARD BELT NUMBERS. EXAMPLE: -D120, "D" INDICATES CROSS SECTION DESIGNATION INCH DIMENSIONS, 120 INDICATES PITCH LENGTH OF 123.3 INCHES; -32C3190, "32C" INDICATES CROSS SECTION DESIGNATION MILLIMETER DIMENSIONS, 3190 INDICATES EFFECTIVE BELT LENGTH IN MILLIMETERS.
5. OIL-RESISTANCE. SEE APPLICABLE PARAGRAPH IN ZZ-B-225. WHEN OIL-RESISTANCE IS REQUIRED THE THE FIRST DASH OF THE MS PART NUMBER SHALL BE REPLACED BY THE LETTER "R".
6. THE MS PART NUMBER FOR INDIVIDUAL BELTS SHALL CONSIST OF MS SHEET NUMBER, PLUS THE LETTER "R" FOR OIL-RESISTANCE (WHEN APPLICABLE) AND THE DASH NUMBER

   EXAMPLES:

   MS 39258 - D 120
   - 120 — PITCH LENGTH (INCH)
   - D — BELT CROSS SECTIONAL DESIGNATION

   MS 39258 R 32C 3190
   - 3190 — LENGTH IN MILLIMETERS
   - 32C — BELT CROSS SECTIONAL DESIGNATION
   - R — OIL-RESISTANCE REQUIRED

7. THE MS PART NUMBER FOR MATCHED SETS SHALL CONSIST OF THE MS SHEET NUMBER, PLUS OIL-RESISTANCE (WHEN APPLICABLE), PLUS THE NUMBER OF BELTS IN SET, PLUS THE DASH NUMBER (CROSS SECTION AND LENGTH).

   EXAMPLES:

   MS 39258 3 D 120
   - 120 — PITCH LENGTH (INCH)
   - D — BELT CROSS SECTIONAL DESIGNATION
   - 3 — NUMBER OF BELTS IN THE SET

   MS 39258 R 3 32C 3190
   - 3190 — LENGTH IN MILLIMETERS
   - 32C — BELT CROSS SECTIONAL DESIGNATION
   - 3 — NUMBER OF BELTS IN THE SET
   - R — OIL-RESISTANCE REQUIRED

8. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
9. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

APPROVED 20 MAY 1965 REVISED (B) FOR CHANGES SEE SHEETS 1 AND 2

P A ME / Other Cust YD 99	INTERNATIONAL INTEREST	TITLE: BELT, "V" INDUSTRIAL (MULTIPLE DRIVE) "D" AND "32C" CROSS SECTION.	MILITARY STANDARD MS 39258
PROCUREMENT SPECIFICATION: Z Z -B-225	SUPERSEDES:		SHEET 2 OF 2

DD FORM 672-1 (COORDINATED)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:50Z
Check the source to verify that this is the current version before use.