FED. SUP CLASS
5940

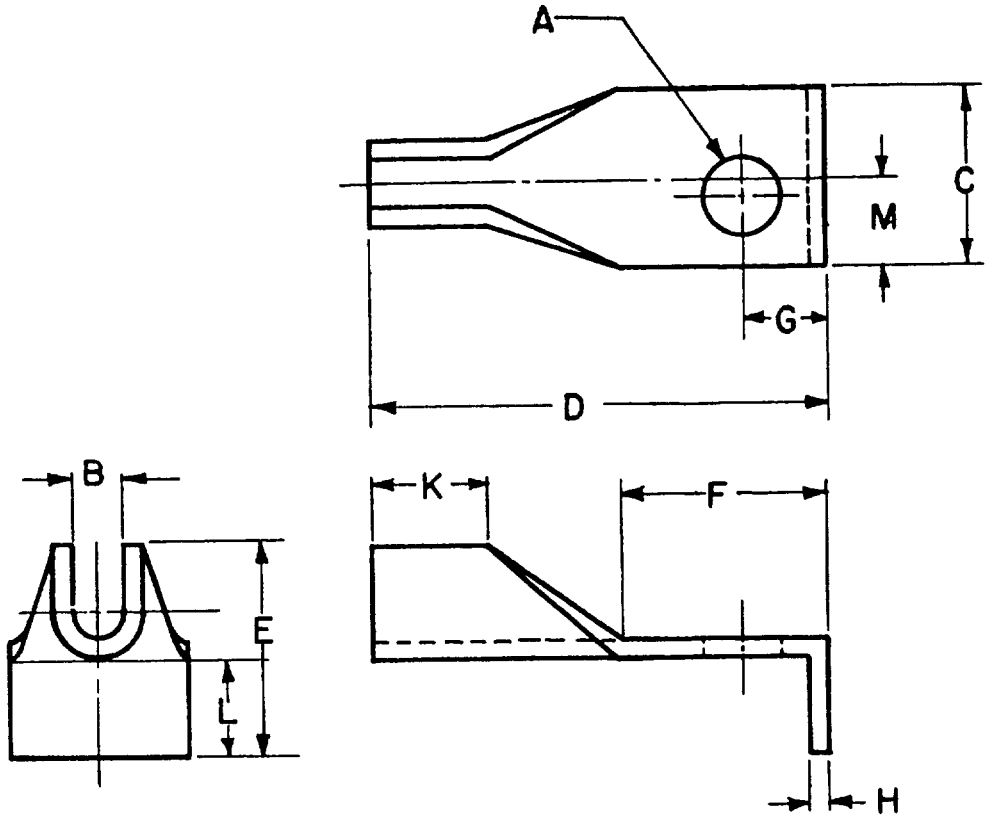

DASH NO.	WIRE SIZE AWG NOM	STUD SIZE	A HOLE DIA MIN	A HOLE DIA MAX	B	C	D	E	F	G ±.005 -.000	H ±.003	K	L	M
1	10	4	.115	.127	1/8	1/4	21/32	1/4	11/32	.157	.032	1/8	1/16	1/8
2	12	6	.141	.153	3/32	5/16	27/32	3/8	—	.157 ©		3/16	3/16	

MATERIAL: COPPER, ANNEALED - SPECIFICATION QQ-C-576.

FINISH: HOT TIN DIP OR ELECTRODEPOSITIED TIN ALL OVER, MINIMUM THICKNESS .0005 INCHES.

NOTES:
1. ALL DIMENSIONS IN INCHES. TOLERANCES: FRACTIONAL ± 1/64 UNLESS OTHERWISE SPECIFIED.
2. REMOVE ALL BURRS.
3. REFERENCED DOCUMENTS OF ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS SHALL APPLY.
4. THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER.

APPROVED 5 JULY 55 — REVISED (A) 23 JULY 56, (B) 10 FEBRUARY 61, (C) 10 JULY 64

P.A. MU

Other Cust SHIPS

Procurement Specification MIL-T-15659

TITLE
TERMINAL, LUG, SOLDER TYPE, COPPER STAMPING, ONE HOLE, LOCATING LIP

SUPERSEDES:

MILITARY STANDARD

MS 35435

SHEET 1 OF 1

REVIEW ACTIVITIES: ARMY [illegible], MO
NAVY [illegible], YD

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:23Z
Check the source to verify that this is the current version before use.