FED. SUP CLASS
4720

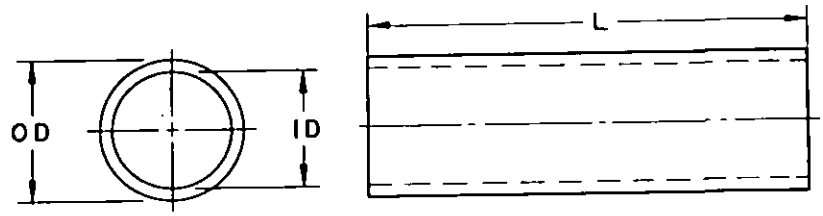


| SIZE NO | 01 | 02 | 03 | 04 | 05 | 06 | 07 | 08 | 09 | 10 | 11 |
|---|---|---|---|---|---|---|---|---|---|---|---|
| NOMINAL ID, INCHES * | 3/8 | 1/2 | 5/8 | 3/4 | 7/8 | 1 | 1-1/8 | 1-1/4 | 1-5/16 | 1-3/8 | 1-7/16 |

| SIZE NO | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 |
|---|---|---|---|---|---|---|---|---|---|---|---|
| NOMINAL ID, INCHES * | 1-1/2 | 1-9/16 | 1-5/8 | 1-3/4 | 1-7/8 | 2 | 2-1/8 | 2-1/4 | 2-3/8 | 2-1/2 | 2-5/8 |

| SIZE NO | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 |
|---|---|---|---|---|---|---|---|---|---|---|
| NOMINAL ID, INCHES * | 2-3/4 | 2-7/8 | 3 | 3-1/8 | 3-1/4 | 3-3/8 | 3-1/2 | 3-3/4 | 4 | 4-1/2 |

| APPLICABILITY OF CLASSES TO TYPES AND GRADES | | |
|---|---|---|
| TYPES | GRADES | CLASSES |
| I | A<br>B | 2,4<br>1, 2, 3,4 |
| II | A<br>B | 2,4<br>1, 2, 3,4 |
| III | A<br>B | 2, 4<br>2, 3, 4 |
| IV | A<br>B | 2, 4<br>2, 3, 4 |

(A) REQUIREMENTS:

1. TYPES I THRU IV OF PROCUREMENT SPECIFICATION EXCEPT CURVED PREFORMED HOSES. FOR TYPE V SEE MS51008.
2. MS PART NUMBER SHALL BE FORMULATED TO REFLECT TYPE, GRADE, CLASS, SIZE NO. AND LENGTH.
3. HOSE SHOULD BE REQUISITIONED IN BULK QUANTITIES AND FIELD MAINTENANCE UNITS FABRICATE TO LENGTHS. PART NUMBERS FOR SPECIFIC LENGTHS SHALL BE USED IN ORDERING ONLY WHEN THE NEED FOR CUT LENGTHS EXCEEDS MAINTENANCE ELEMENT CAPABILITY. DO NOT FORMULATE MS PART NUMBERS FOR CURVED PREFORMED HOSES. EXAMPLES OF MS PART NUMBERS:

MSXXXXX 1 A 2 32 24 4
- 4 — LENGTH IN EIGHTHS (1/8 OF AN INCH)
- 24 — LENGTH IN INCHES
- 32 — SIZE NO.
- 2 — CLASS
- A — GRADE
- 1 — TYPE

MSXXXXX 5 B 4 19 R
- R — RANDOM LENGTHS AS SPECIFIED IN ZZ-H-428
- 19 — SIZE NO.
- 4 — CLASS
- B — GRADE
- 5 — TYPE

4. MARKING SHALL CONSIST OF THE PART NUMBER IN ADDITION TO THE MARKING REQUIREMENTS OF FEDERAL SPECIFICATION ZZ-H-428.

(A) NOTES:

1. ILLUSTRATIONS IN THIS PUBLICATION ARE REPRESENTATIVE AND TYPICAL OF THE ITEM(S) DESCRIBED RATHER THAN EXACT REPRESENTATIONS SINCE THE PRODUCTS OF VARIOUS MANUFACTURERS MAY VARY IN APPEARANCE.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.
3. THE USE OF RECYCLED MATERIALS WHICH MEET THE REQUIREMENTS OF THE APPLICABLE MATERIAL SPECIFICATION WITHOUT JEOPARDIZING THE INTENDED USE OF THE ITEM SHALL BE ENCOURAGED.

(A) CERTAIN PROVISIONS (IDENTIFIED BY AN *) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENTS NATO STANAG 4043 AND QSTAG 133. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

(A) DENOTES CHANGES

REVIEW ACTIVITY: DLA-CS

APPROVED 20 NOVEMBER 1975 REVISED (A) 12 DECEMBER 1979

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

| P.A. ARMY-AT<br>Other Cust<br>NAVY-YD<br>AF-99 | TITLE<br>HOSE, NONMETALLIC:<br>STRAIGHT, ENGINE COOLANT | MILITARY STANDARD<br>MS 52130 |
|---|---|---|
| PROCUREMENT SPECIFICATION<br>ZZ-H-428 | SUPERSEDES: | SHEET 1 OF 1 |

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

4720-0546

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.