


FED. SUP CLASS
4730

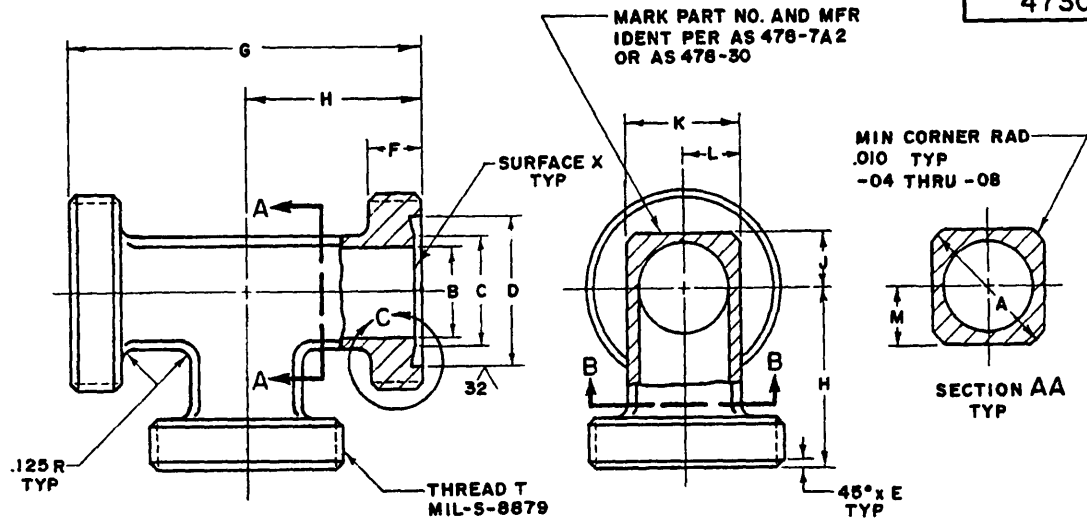




SECTION THRU THREAD PROFILE

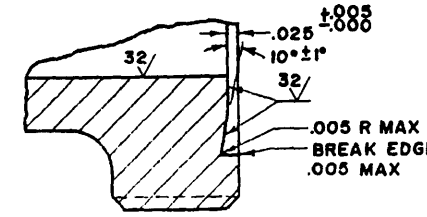

VIEW C TYP



SECTION BB

MS PART NO.	TUBE O.D.	THREAD T UNJEF-3A	A DIA	B DIA ±.003	C DIA +.000 -.010	D DIA +.002 -.000	E	F +.010 -.000	G +.010 -.000	H	J +.015 -.000	K +.002 -.006	L	M +.015 -.000	APPROX WEIGHT LB/EA
MS27863-04	1/4	11/16-24	—	.204	.282	.470	.030	.208	1.330	.665	.164	.438	.219	.135	
MS27863-06	3/8	13/16-20	—	.317	.420	.608	.035	.250	1.572	.786	.220	.562	.281	.202	.057
MS27863-08	1/2	15/16-20	—	.428	.536	.724	.035	.250	1.698	.849	.288	.688	.344	.268	
MS27863-12	3/4	1-3/16-18	1.110	.678	.808	.986	.040	.278	2.026	1.013	.410	.875	.438	.393	.117
MS27863-16	1	1-1/2-18	1.375	.900	1.090	1.282	.040	.278	2.338	1.169	.548	1.125	.562	.529	

1. THREAD PD SHALL BE SQUARE TO SURFACE X WITHIN .005 FIR AND CONCENTRIC WITH DIA D WITHIN .005 FIR.
2. MATERIAL: ALUMINUM ALLOY, AMS 4127.
3. CLEANING: FINISHED PARTS SHALL BE CLEANED PER MIL-F-27417.
4. SURFACE TEXTURE: IN ACCORDANCE WITH USAS B46.1, UNLESS OTHERWISE SPECIFIED ALL MACHINED SURFACES TO BE 63 MICROINCHES.
5. BREAK EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
6. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ± 5°.
7. DO NOT USE UNASSIGNED PART NUMBERS.
8. REFER TO MS27856 FOR ASSEMBLY.
   FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
   REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 14 JULY 1967 REVISED

Review activities: 11, 14, 19, 69, 85 & NAS

This standard has been approved by the Department of the AIR FORCE and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. USAF 12 Other Cust	TITLE TEE, ALUMINUM, FLUID CONNECTION FITTING, LOW PRESSURE	MILITARY STANDARD MS27863 (USAF)
PROCUREMENT SPECIFICATION MIL-F-27417	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-23T16:53Z
Check the source to verify that this is the current version before use.