INCH-POUND

MIL-C-3098/68D
28 June 1995
SUPERSEDING
MIL-C-3098/68C
23 June 1975


MILITARY SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR91/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirement for the acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-3098.

Pertinent characteristics: 9.5 to 12.5 MHz; fundamental; noncontrolled; antiresonance.

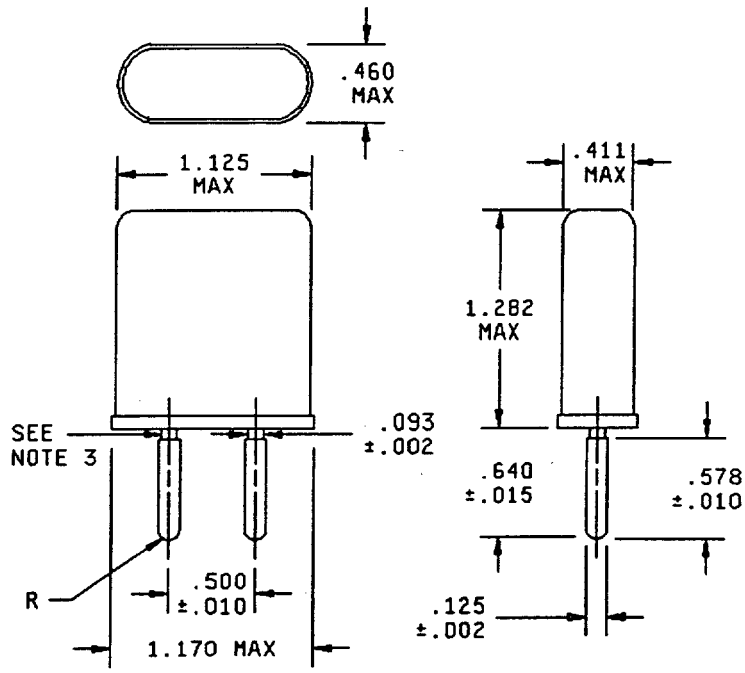

Inches	mm
.002	0.05
.010	0.25
.015	0.38
.093	2.36
.125	3.18
.411	10.44
.460	11.68
.500	12.70
.578	14.68
.640	16.26
1.125	28.58
1.170	29.72
1.282	32.56

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Pin undercut may be omitted.
4. Marking to be in accordance with MIL-C-3098.

FIGURE 1. Crystal unit - CR91/U.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Holder: HC-11A/U (MIL-H-10056/17).

Dimensions, marking, and configuration: See figure 1.

Frequency range: 9.5 to 12.5 MHz, inclusive. 1/

Mode of oscillation: Fundamental.

Rated drive level: 25 mW.

Operating temperature range: -55°C to +90°C, inclusive.

Frequency tolerance (operating temperature range): ±50 ppm.

Equivalent resistance: 25 ohms, maximum.

Antiresonance, load capacitance: 55.0 ±0.5 pF.

Shock (specified pulse):

Frequency change permitted: ±5 ppm.

Equivalent resistance change: ±10 percent.

Vibration: Method 201 of MIL-STD-202.

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Frequency and equivalent resistance:

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Aging:

Frequency change permitted: ±5 ppm.

NOTES:

1. Intended use. These crystal units have previously been misidentified as CR-1A/AR. Type CR91/U crystal units are for use in Aircraft Radio Corporation type 12 equipment.

2. This crystal-unit is to be used for special applications and for replacement purposes only. Specific approval of the government is required prior to each intended use. See MIL-STD-683.

Revision letters are not used to denote changes due to the extensiveness of the changes.

1/ In using equipment, these frequencies are multiplied to the 12th harmonic which is also known as aircraft frequency.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:39Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - AS, MC, SH
Air Force - 17, 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5955-0680-15)

Source: https://assist.dla.mil -- Downloaded: 202610-16T16:39Z
Check the source to verify that this is the current version before use.