
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AN160101 THRU AN160400

FSC 5307

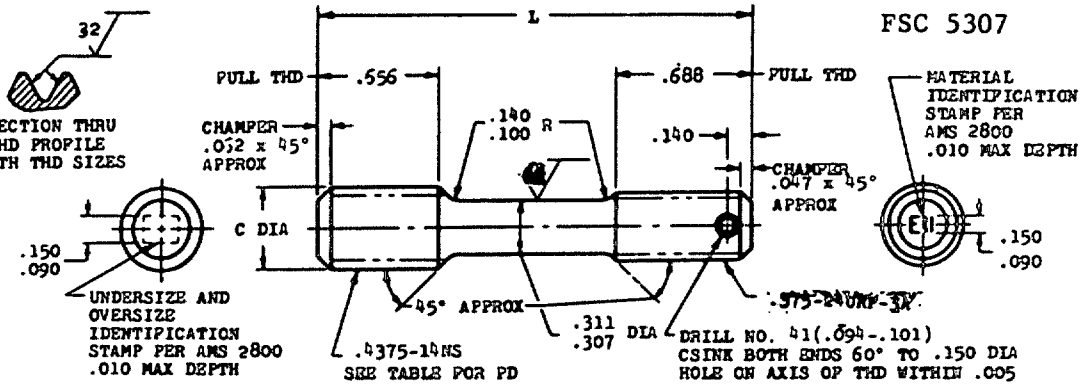

UNDERSIZE AND OVERSIZE IDENTIFICATION	-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C	.433- .438	.433- .438	.433- .438	.433- .438	.442- .447	.442- .447
PD BEFORE PLATING	.3927-.3937	.3957-.3967	.3987-.3997	.4017-.4027	.4047-.4057	.4077-.4087
PD AFTER PLATING	.3932-.3947	.3962-.3977	.3992-.4007	.4022-.4037	.4052-.4067	.4082-.4097
PD LEAD THREAD	.3851-.3881	.3891-.3911	.3921-.3941	.3951-.3971	.3981-.4001	.4011-.4031
L	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
1.594	AN160113	AN160114	AN160115	AN160116	AN160117	AN160118
1.656	AN160119	AN160120	AN160121	AN160122	AN160123	AN160124
1.719	AN160125	AN160126	AN160127	AN160128	AN160129	AN160130
1.781	AN160131	AN160132	AN160133	AN160134	AN160135	AN160136
1.844	AN160137	AN160138	AN160139	AN160140	AN160141	AN160142
1.906	AN160143	AN160144	AN160145	AN160146	AN160147	AN160148
1.969	AN160149	AN160150	AN160151	AN160152	AN160153	AN160154
2.031	AN160155	AN160156	AN160157	AN160158	AN160159	AN160160
2.094	AN160161	AN160162	AN160163	AN160164	AN160165	AN160166
2.156	AN160167	AN160168	AN160169	AN160170	AN160171	AN160172
2.219	AN160173	AN160174	AN160175	AN160176	AN160177	AN160178
2.281	AN160179	AN160180	AN160181	AN160182	AN160183	AN160184
2.344	AN160185	AN160186	AN160187	AN160188	AN160189	AN160190
2.406	AN160191	AN160192	AN160193	AN160194	AN160195	AN160196
2.531	AN160197	AN160198	AN160199	AN160200	AN160201	AN160202
2.656	AN160203	AN160204	AN160205	AN160206	AN160207	AN160208
2.781	AN160209	AN160210	AN160211	AN160212	AN160213	AN160214
2.906	AN160215	AN160216	AN160217	AN160218	AN160219	AN160220
3.031	AN160221	AN160222	AN160223	AN160224	AN160225	AN160226
3.156	AN160227	AN160228	AN160229	AN160230	AN160231	AN160232
3.281	AN160233	AN160234	AN160235	AN160236	AN160237	AN160238
3.406	AN160239	AN160240	AN160241	AN160242	AN160243	AN160244
3.531	AN160245	AN160246	AN160247	AN160248	AN160249	AN160250
3.656	AN160251	AN160252	AN160253	AN160254	AN160255	AN160256
3.781	AN160257	AN160258	AN160259	AN160260	AN160261	AN160262
3.906	AN160263	AN160264	AN160265	AN160266	AN160267	AN160268
4.031	AN160269	AN160270	AN160271	AN160272	AN160273	AN160274
4.156	AN160275	AN160276	AN160277	AN160278	AN160279	AN160280
4.281	AN160281	AN160282	AN160283	AN160284	AN160285	AN160286
4.406	AN160287	AN160288	AN160289	AN160290	AN160291	AN160292
4.531	AN160293	AN160294	AN160295	AN160296	AN160297	AN160298
4.656	AN160299	AN160300	AN160301	AN160302	AN160303	AN160304

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.
DO NOT USE UNASSIGNED PART NUMBERS. (3) CANCELED AS OF 9 OCT 87

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 May 50 REVISED (1) 25 Mar 55 (2) 25 Oct 72 (3) 9 OCT 87

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN160101 THRU AN160400
NONE	STUD-STEPPED, DRILLED, HEXED, 1.5 DIA ENGAGEMENT, .4375-14 x .375-24	

E-25-124

Project 5307-0397

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.