
USER ACTIVITIES

REVIEWER ACTIVITIES
DLA-CS
ARMY-MI

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

FED. SUP CLASS
4730

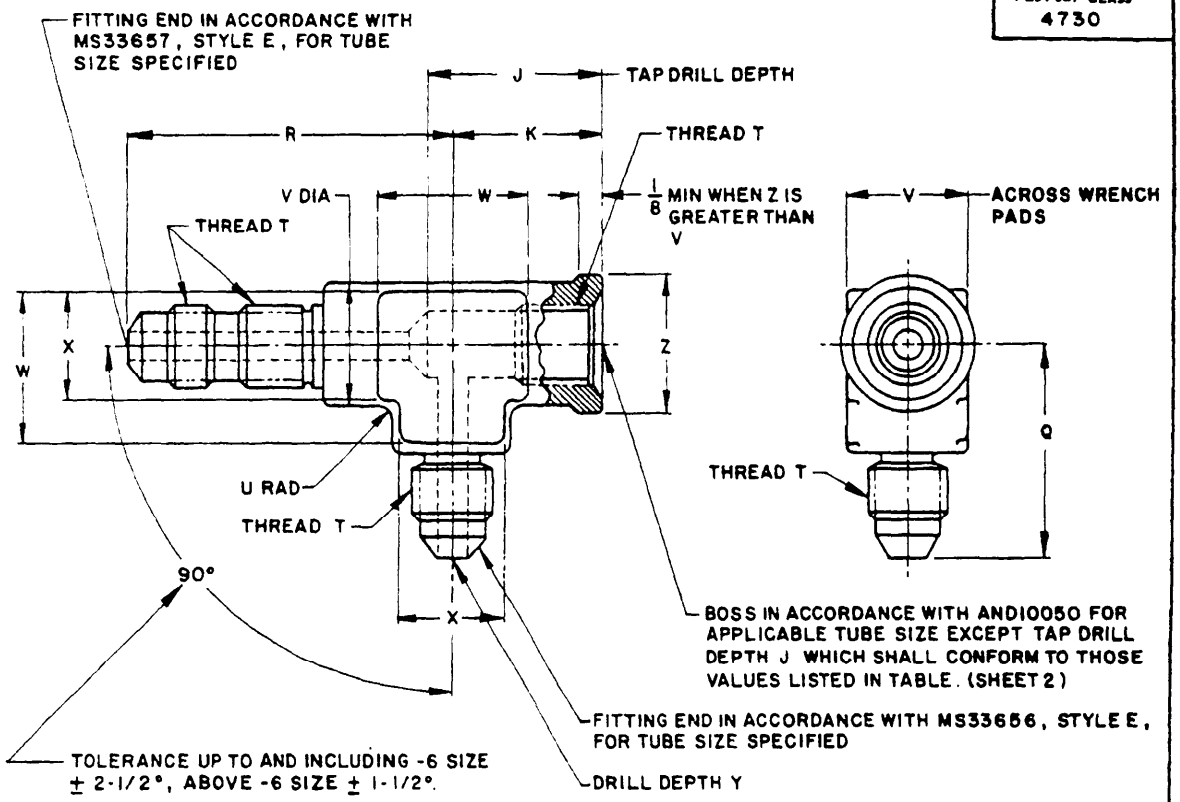

... STEEL BARS, SHAPES OR FORGINGS. TITANIUM ALLOY-BARS, SHAPES OR FORGINGS.
CORROSION-RESISTANT STEEL, BARS, SHAPES OR FORGINGS.
ALUMINUM ALLOY, BARS, SHAPES OR FORGINGS. SEE PROCUREMENT SPECIFICATIONS.

FINISH: SEE PROCUREMENT SPECIFICATION.

NO CODE LETTER IN PART NUMBER FOR STEEL
ADD D IN PLACE OF DASH FOR ALUMINUM ALLOY (EXCEPT 7075-T73).
ADD J IN PLACE OF DASH FOR CORROSION RESISTANT STEEL, TYPE 304.
ADD K IN PLACE OF DASH FOR CORROSION RESISTANT STEEL, TYPE 316.
ADD S IN PLACE OF DASH FOR CORROSION RESISTANT STEEL, TYPE 347.
ADD T IN PLACE OF DASH FOR FOR TITANIUM ALLOY.
ADD W IN PLACE OF DASH FOR 7075-T73 ALUMINUM ALLOY.

EXAMPLE OF PART NUMBERS:
AN784-6 - TEE, 1/2 TUBING, STEEL.
AN784D8 - TEE, 1/2 TUBING, ALUMINUM ALLOY (EXCEPT 7075-T73).
AN784J8 - TEE, 1/2 TUBING, CORROSION RESISTANT STEEL, TYPE 304.
AN784K8 - TEE, 1/2 TUBING, CORROSION RESISTANT STEEL, TYPE 316.
AN784S8 - TEE, 1/2 TUBING, CORROSION RESISTANT STEEL, TYPE 347.
AN784T8 - TEE, 1/2 TUBING, TITANIUM.
AN784W8 - TEE, 1/2 TUBING, 7075-T73 ALUMINUM.

BREAK ALL SHARP EDGES AND REMOVE ALL BURRS AND SLIVERS.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64.

TITANIUM NOT TO BE USED IN OXYGEN SYSTEMS.

APPROVED 14 APR 48 REVISED (11) 15 APRIL 82 (12) 5 Oct 83

(12) ENTIRE STANDARD REVISED

P. A.	INTERNATIONAL INTEREST	AIR FORCE-NAVY AERONAUTICAL STANDARD	
AIR FORCE - 82 Other Cust ARMY - AV NAVY - AS AIR FORCE - 99		TEE, FLARED TUBE, INTERNAL THREAD ON RUN	AN784
PROCUREMENT SPECIFICATION MIL-F-5509	SUPERSEDES:		SHEET 1 OF 2

DD FORM MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT 4730-0476

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:16Z
Check the source to verify that this is the current version before use.

DASH NO.	TUBE OD	THREAD T (REF)	J +3/64 -0	K +3/64 -0	Q +3/64 -0	R +3/64 -0
AN784-2	1/8	5/16-24 UNJF-3A	23/32	5/8	29/32	1-15/32
AN784-3	3/16	3/8 -24 UNJF-3A	13/16	11/16	31/32	1- 1/2
AN784-4	1/4	7/16-20 UNJF-3A	29/32	3/4	1- 3/16	1- 3/4
AN784-5	5/16	1/2 -20 UNJF-3A	15/16			
AN784-6	3/8	9/16-18 UNJF-3A	1- 1/32	13/16	1- 1/4	2
AN784-8	1/2	3/4 -16 UNJF-3A	1 -1/4	1	1- 7/16	2- 5/32
AN784-10	5/8	7/8 -14 UNJF-3A	1-15/32	1- 5/32	1- 5/8	2- 3/8
AN784-12	3/4	1-1/16-12 UNJ -3A	1- 3/4	1-11/32	1-13/16	2- 5/8
AN784-16	1	1-5/16-12 UNJ -3A	2- 1/16	1-17/32	2- 1/16	2-27/32
AN784-20	1-1/4	1-5/8 -12 UNJ -3A	2- 5/16	1-23/32	2- 1/4	3- 1/32

DASH NO.	U RAD	V	W MIN	X MIN	Y +3/64 -0	Z DIA
AN784-2	1/16	1/2	15/32	5/16	29/32	9/16
AN784-3	3/32	9/16	1/2		31/32	5/8
AN784-4		3/4	11/16	7/16	1- 3/16	3/4
AN784-5						
AN784-6	1/8	7/8	25/32		1- 9/32	7/8
AN784-8		1-1/16	29/32	1/2	1-15/32	1- 1/16
AN784-10					1- 3/4	1- 3/16
AN784-12		1-5/16	1- 3/32	5/8	1- 7/8	1- 7/16
AN784-16		1-5/8	1- 5/16	3/4	2- 3/32	1-11/16
AN784-20		1-7/8	1- 1/2	7/8	2- 1/4	2

APPROVED 14 APR 48 (12) REVISED FOR CHANGE SEE PAGES 1 & 2.

USER ACTIVITIES:
REVIEWER ACTIVITIES:
DLA-CS
ARMY-MI
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P. A.
AIR FORCE - 82
Other Cust
ARMY - AV
NAVY - AS
AIR FORCE - 99

INTERNATIONAL INTEREST

AIR FORCE-NAVY AERONAUTICAL STANDARD

TEE, FLARED TUBE, INTERNAL THREAD ON RUN

AN784

PROCUREMENT SPECIFICATION
MIL-F-5509

SUPERSEDES:

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 20260-26T14:16Z
Check the source to verify that this is the current version before use.