
FED. SUP CLASS
9540

SHARP EDGES
ROUNDED .010

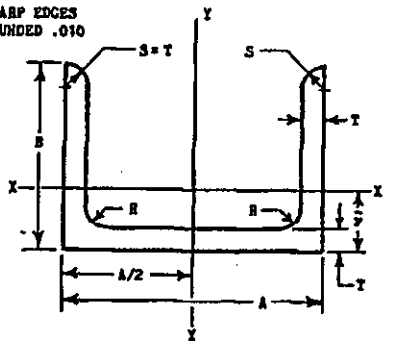

NOTES ON SYMBOLS

"$\bar{y}$" = LOCATING DIMENSIONS FOR AXIS XX-YY.

Ixx (and Iyy) = MOMENT OF INERTIA ABOUT XX AND YY.

ρxx (and ρyy) = RADIUS OF GYRATION ABOUT XX AND YY.

DASH NUMBER: IS DIE NUMBER AND INDICATES EACH SHAPE AND SIZE OF SECTION. EXAMPLE: IN "AND10137-1101", "10137" INDICATES "CHANNEL", 11 INDICATES 1-1/8" FOR DIMENSION "A" (1.125 IN COL. "A"). 01 IN 1101 IS SERIAL NUMBER ONLY.

MATERIAL SHALL BE IN ACCORDANCE WITH APPLICABLE GOVERNMENT SPECIFICATIONS.

AND 10137 DASH NO'S	NOMINAL DIMENSIONS				AREA
	A	B	T	R	
	Inches				Square Inches
-0601	.750	.375	.050	.094	.0727
-0602		.500	.050		.0852
-0603		.625	.050		.0977
-0604			.063		.123
-0605		.875	.063	.125	.155
-0606			.094		.220
-0701	.875	.375	.050	.094	.0790
-0702		.500	.050		.0916
-0703			.063		.115
-0704		.625	.063	.125	.131
-0705			.078		.158
-0706		.750	.050	.094	.117
-0707			.063		.147
-0708			.078	.125	.177
-0709		1.000	.078		.216
-0710			.125		.328
-1001	1.000	.500	.063	.125	.123
-1002			.078		.148
-1003		.625	.063		.139
-1004			.078		.168
-1005		.750	.063		.155
-1006			.078		.187
-1007			.094		.220
-1008		.875	.063		.170
-1009			.078		.206
-1010			.094		.244
-1011		1.250	.078		.265
-1012			.125		.406
-1101	1.125	.500	.063	.125	.131
-1102			.078		.158
-1103		.625	.063		.147
-1104			.078		.177

SECTION ELEMENTS				
$\bar{y}$	Ixx	Iyy	ρxx	ρyy
Inch	Inches^4		Inch	
.106	.0009	.0060	.111	.286
.153	.0020	.0075	.152	.296
.204	.0037	.0090	.195	.304
.207	.0045	.0109	.190	.298
.315	.0117	.0147	.275	.308
.327	.0159	.0193	.269	.296
.0995	.0009	.0037	.106	.332
.146	.0020	.0110	.148	.347
.148	.0025	.0132	.144	.339
.196	.0047	.0158	.190	.347
.201	.0055	.0183	.187	.341
.145	.0065	.0151	.237	.360
.147	.0079	.0184	.233	.354
.253	.0094	.0214	.230	.348
.362	.0213	.0276	.314	.358
.379	.0304	.0373	.306	.339
.140	.0026	.0181	.144	.394
.145	.0029	.0211	.141	.377
.187	.0049	.0216	.187	.394
.193	.0058	.0272	.186	.385
.229	.0033	.0250	.231	.402
.242	.0098	.0294	.229	.393
.248	.0113	.0335	.226	.390
.289	.0128	.0285	.275	.409
.294	.0152	.0335	.271	.403
.300	.0176	.0383	.269	.397
.460	.0417	.0460	.397	.417
.478	.0607	.0643	.397	.393
.136	.0027	.0241	.143	.429
.139	.0031	.0281	.140	.422
.178	.0051	.0285	.186	.441
.184	.0060	.0334	.184	.434

(2) REDRAWN

APPROVED 2 Apr 43 — REVISED (1) 21 Mar 45 (2) 3 Mar 52

This standard is approved for use by the Department of the Air Force and is available for use by all Department and Agencies of the Department of Defense.

P. A.	INTERNATIONAL INTEREST	TITLE	ARMY-NAVY AERONAUTICAL DESIGN STANDARD
Air Force - 11 Other Cust NO INTEREST		CHANNEL - EXTRUDED	AND10137
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		SHEET 1 OF 4


DD FORM 1 MAY 71 672-1 (LIMITED COORDINATION) — PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Project No. 9540-0078

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:29Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
9540

SHARP EDGES
ROUNDED .010

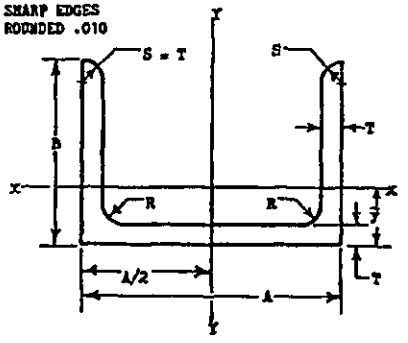

NOTES ON SYMBOLS

"$\bar{y}$" = LOCATING DIMENSIONS FOR AXIS XX-YY.

Ixx (and Iyy) = MOMENT OF INERTIA ABOUT XX AND YY.

ρxx (and ρyy) = RADIUS OF GYRATION ABOUT XX AND YY.

DASH NUMBER: IS DIE NUMBER AND INDICATES EACH SHAPE AND SIZE OF SECTION. EXAMPLE: IN "AND10137-1401", "10137" INDICATES "CHANNEL", 14 INDICATES 1-4/8" FOR DIMENSION "A" (1.500 IN COL. "A"). 01 IN 1401 IS SERIAL NUMBER ONLY.

MATERIAL SHALL BE IN ACCORDANCE WITH APPLICABLE GOVERNMENT SPECIFICATIONS.

AND 10137 DASH NO'S	NOMINAL DIMENSIONS				AREA
	A	B	T	R	
	Inches				Square Inches
-1105	1.125	.750	.078	.125	.197
-1106			.094		.232
-1107		.875	.063		.181
-1108			.078		.216
-1109			.094		.256
-1110			.125		.328
-1111		1.000	.078		.236
-1112			.094		.279
-1113			.125		.359
-1114		1.375	.094		.350
-1115			.125		.453
-1201	1.250	.625	.094	.125	.220
-1202		.875	.094		.267
-1203			.125		.344
-1204		1.125	.078		.265
-1205			.094		.314
-1206			.125		.406
-1207		1.500	.125		.500
-1301	1.375	.625	.078	.125	.197
-1302			.094		.232
-1303		.875	.078		.236
-1304			.094		.279
-1305			.125		.359
-1306		1.125	.094		.326
-1307			.125		.422
-1308			.156		.513
-1309		1.625	.156		.668
-1401	1.50	.625	.094	.125	.244
-1402			.125		.313
-1403		.875	.125		.375
-1404			.156		.455
-1405		1.125	.094		.338

SECTION ELEMENTS				
$\bar{y}$	Ixx	Iyy	ρxx	ρyy
Inch	Inches^4		Inch	
.232	.0102	.0388	.228	.444
.237	.0117	.0444	.225	.438
.278	.0135	.0379	.274	.458
.283	.0158	.0441	.271	.452
.289	.0183	.0507	.268	.445
.298	.0225	.0616	.262	.433
.336	.0232	.0495	.314	.458
.341	.0269	.0569	.310	.452
.352	.0331	.0695	.303	.440
.508	.0661	.0757	.435	.466
.519	.0832	.0930	.428	.453
.181	.0071	.0493	.179	.473
.278	.0190	.0650	.267	.493
.288	.0234	.0796	.261	.481
.377	.0334	.0698	.355	.513
.383	.0389	.0807	.352	.507
.393	.0434	.0994	.345	.495
.460	.1106	.1292	.470	.508
.169	.0063	.0549	.179	.526
.175	.0073	.0621	.177	.517
.263	.0169	.0705	.268	.547
.268	.0198	.0818	.266	.543
.278	.0242	.1002	.259	.528
.371	.0403	.1010	.352	.557
.381	.0504	.1246	.346	.544
.390	.0591	.1451	.339	.532
.614	.1710	.2035	.506	.552
.168	.0076	.0768	.177	.561
.178	.0090	.0939	.170	.548
.269	.0249	.1236	.258	.574
.278	.0289	.1485	.267	.572
.360	.0414	.1233	.350	.604

APPROVED 2 Apr 43 REVISED (1) 21 Mar 45 (2) 3 Mar 52

This standard is approved for use by the Department of the Air Force and is available for use by all Department and Agencies of the Department of Defense.


P. A. Air Force - 11 Other Cust NO INTEREST	INTERNATIONAL INTEREST	TITLE CHANNEL - EXTRUDED	ARMY-NAVY AERONAUTICAL DESIGN STANDARD AND 10137
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		SHEET 2 OF 4

DD FORM 1 MAY 52 672-1 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:29Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
9340

SHARP EDGES ROUNDED .010

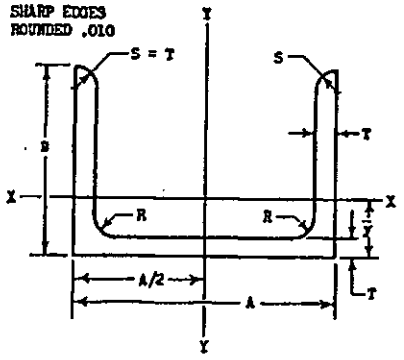

NOTES ON SYMBOLS

"y" = LOCATING DIMENSIONS FOR AXIS XX-YY.

Ixx (and Iyy) = MOMENT OF INERTIA ABOUT XX AND YY.

ρxx (and ρyy) = RADIUS OF GYRATION ABOUT XX AND YY.

DASH NUMBER: IS DIE NUMBER AND INDICATES EACH SHAPE AND SIZE OF SECTION. EXAMPLE: IN "AND10137-2401", "10137" INDICATES "CHANNEL", 24 INDICATES 2-4/8" FOR DIMENSION "A" (2.500 IN COL. "A"). 01 IN 2401 IS SERIAL NUMBER ONLY.

MATERIAL SHALL BE IN ACCORDANCE WITH APPLICABLE GOVERNMENT SPECIFICATIONS.

AND 10137 DASH NO'S	NOMINAL DIMENSIONS				AREA	SECTION ELEMENTS				
	A	B	T	R		y	Ixx	Iyy	ρxx	ρyy
	Inches				Square Inches	Inch	Inches^4		Inch	
-1406	1.500	1.125	.156	.125	.533	.379	.0610	.1791	.338	.580
-1407		1.750	.156		.728	.654	.2176	.2675	.547	.606
-1601	1.750	.750	.078	.125	.245	.194	.0117	.1104	.218	.671
-1602			.094		.291	.199	.0135	.1280	.215	.664
-1603		.875	.125		.406	.253	.0262	.1793	.254	.664
-1604		1.000	.094		.338	.290	.0311	.1603	.304	.689
-1605			.156		.533	.309	.0454	.2347	.292	.664
-1606		1.250	.125		.500	.400	.0740	.2123	.385	.695
-1607			.156		.611	.409	.0875	.2844	.379	.683
-1608			.188	.188	.728	.416	.1003	.3270	.371	.670
-1609		1.500	.125	.125	.563	.505	.1243	.2826	.470	.709
-1610			.156		.689	.511	.1482	.3340	.464	.696
-1611			.188	.188	.822	.521	.1712	.3861	.455	.685
-1612		2.000	.188		1.01	.742	.3916	.5000	.623	.704
-2001	2.000	.750	.094	.125	.344	.187	.0140	.1768	.213	.750
-2002			.125		.406	.197	.0171	.2202	.205	.736
-2003			.156		.494	.207	.0198	.2583	.200	.723
-2004		1.000	.094		.361	.274	.0324	.2194	.300	.779
-2005			.125		.469	.284	.0405	.2752	.294	.766
-2006			.156		.572	.293	.0474	.3247	.288	.754
-2007		1.250	.125		.531	.380	.0774	.3302	.382	.788
-2008			.156		.650	.389	.0916	.3912	.376	.776
-2009		1.500	.125		.594	.482	.1302	.3852	.468	.806
-2010			.156		.728	.491	.1553	.4576	.462	.793
-2011		1.750	.156		.806	.598	.2410	.5241	.547	.807
-2012			.188	.188	.963	.604	.2802	.6071	.539	.794
-2013		2.500	.188		1.25	.939	.7720	.8394	.787	.821
-2201	2.250	1.000	.094	.125	.385	.261	.0335	.2893	.296	.868
-2202			.125		.500	.270	.0419	.3652	.290	.855
-2401	2.500	1.000	.094	.125	.408	.268	.0346	.3723	.291	.955
-2402			.125		.531	.258	.0432	.4706	.285	.941
-2403			.156		.650	.268	.0508	.5596	.280	.928

APPROVED 2 Apr 43 REVISED (1) 21 Mar 45 (2) 3 Mar 62


This standard is approved for use by the Department of the Air Force and is available for use by all Department and Agencies of the Department of Defense.

P. A. Air Force – 11 Other Cust NO INTEREST	INTERNATIONAL INTEREST	TITLE CHANNEL – EXTRUDED	ARMY-NAVY AERONAUTICAL DESIGN STANDARD AND10137
	SUPERSEDES:		SHEET 3 OF 4

DD FORM 1 MAY 73 672-1 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:29Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
9540

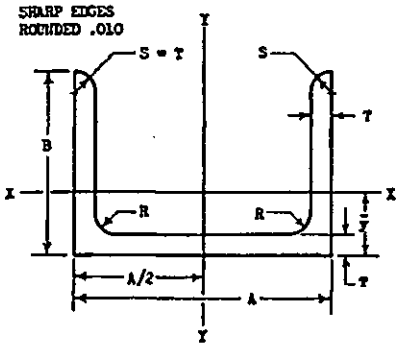

NOTES ON SYMBOLS

"y" = LOCATING DIMENSIONS FOR AXIS XX-YY.

Ixx (and Iyy) = MOMENT OF INERTIA ABOUT XX AND YY.

ρxx (and ρyy) = RADIUS OF GYRATION ABOUT XX AND YY.

DASH NUMBER: IS DIE NUMBER AND INDICATES EACH SHAPE AND SIZE OF SECTION. EXAMPLE: IN "AND10137-2404", "10137" INDICATES "CHANNEL", 24 INDICATES 2-4/8" FOR DIMENSION "A" (2.500 IN COL. "A"). 04 IN 2404 IS SERIAL NUMBER ONLY.

MATERIAL SHALL BE IN ACCORDANCE WITH APPLICABLE GOVERNMENT SPECIFICATIONS.

AND 10137 DASH NO'S	NOMINAL DIMENSIONS				AREA		SECTION ELEMENTS				
	A	B	T	R			$\bar{y}$	Ixx	Iyy	ρ_{xx}	ρ_{yy}
	Inches				Square Inches		Inch	Inches^4		Inch	
-2404	2.500	1.375	.125	.125	.625		.394	.1093	.6030	.418	.982
-2405			.156		.767		.403	.1302	.7206	.412	.970
-2406			.188	.188	.916		.411	.1500	.8398	.405	.957
-2407		1.750	.156	.125	.884		.552	.2605	.8935	.543	1.006
-2408			.188	.188	1.06		.559	.3029	1.027	.535	.986
-2601	2.750	1.000	.125	.125	.563		.247	.0444	.5931	.281	1.03
-2602			.156		.689		.257	.0522	.7069	.275	1.01
-3001	3.000	1.375	.156	.125	.845		.373	.1378	1.113	.404	1.15
-3002			.188	.188	1.01		.381	.1585	1.303	.396	1.14
-3003		1.750	.156	.125	.962		.514	.2767	1.349	.536	1.19
-3004			.188	.188	1.15		.521	.3217	1.582	.529	1.17

APPROVED 2 Apr 63 REVISED ① 21 Mar 75 ② 3 Mar 82

This standard is approved for use by the Department of the Air Force and is available for use by all Department and Agencies of the Department of Defense.

P. A. Air Force - 11 Other Cust NO INTEREST	INTERNATIONAL INTEREST	TITLE CHANNEL - EXTRUDED	ARMY-NAVY AERONAUTICAL DESIGN STANDARD AND 10137
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672-1 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:29Z
Check the source to verify that this is the current version before use.