MIL-R-11804/1C
18 MAY 1979
SUPERSEDING
MIL-R-11804/1B
1 February 1965

MILITARY SPECIFICATION

RESISTORS, FIXED, FILM (POWER TYPE),

STYLES RD31, RD33, RD35, RD37, AND RD39

This specification is approved for use by all Departments and Agencies of the Department of Defense.

THIS SPECIFICATION INACTIVE FOR DESIGN AFTER DATE OF THIS SPECIFICATION (SEE 6.3)

1. SCOPE

1.1 Scope. This specification covers the detail requirements for styles RD31, RD33, RD35, RD37, and RD39, tab-terminal, power-type, film, fixed resistors.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following document of the issue in effect on date of invitation for bids or request for proposal, forms a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-R-11804 - Resistors, Fixed, Film (Power Type), General Specification for.

(Copies of specifications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Requirements. Requirements shall be in accordance with MIL-R-11804, and as specified herein.

3.2 Design and construction. Resistors shall be of the design, construction, and physical dimensions specified on figure 1.

3.3 Resistance values. The resistance values applicable to each style shall be as specified in table I.

TABLE I. Resistance values. 1/


Style	Minimum resistance	Maximum resistance Characteristic P
	Ohms	Megohms
RD31 - - - -	10	0.196
RD33 - - - -	19.6	0.196
RD35 - - - -	19.6	0.487
RD37 - - - -	19.6	0.487
RD39 - - - -	30.1	1.0

1/ For standard resistance values, see MIL-R-11804.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Electronics Research and Development Command, ATTN: DELET-RP, Fort Monmouth, New Jersey 07703, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 5905

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:59Z
Check the source to verify that this is the current version before use.

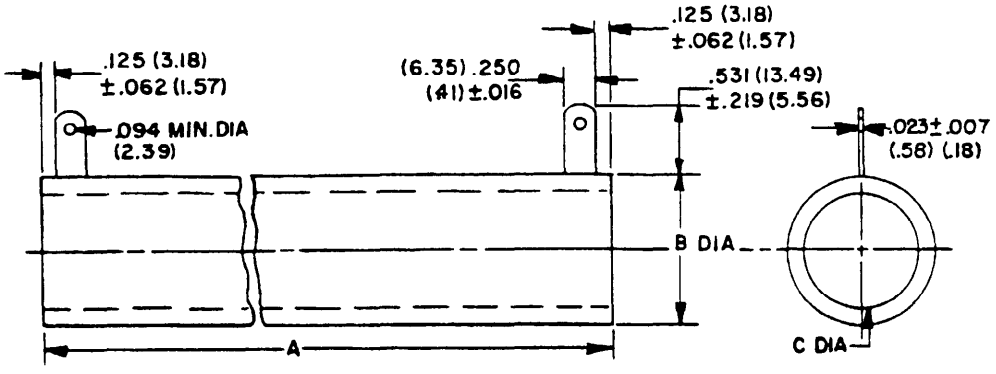

Dimensions			
Style	A ±.062 (1.57)	B	C
RD31	1.500 (38.10)	.500 (12.70) $^{+.094\ (2.39)}_{-.078\ (1.98)}$	.344 (8.74) $^{+.078\ (1.98)}_{-.094\ (2.39)}$
RD33	3.000 (76.20)	.500 (12.70) $^{+.094\ (2.39)}_{-.078\ (1.98)}$	.344 (8.74) $^{+.078\ (1.98)}_{-.094\ (2.39)}$
RD35	4.000 (101.60)	.812 (20.62) $^{+.094\ (2.39)}_{-.078\ (1.98)}$	.609 (15.47) ±.125 (3.18)
RD37	6.000 (152.40)	1.219 (30.96) $^{+.094\ (2.39)}_{-.109\ (2.77)}$	.906 (23.01) ±.172 (4.37)
RD39	12.000 (304.80)	1.218 (30.94) $^{+.094\ (2.39)}_{-.109\ (2.77)}$	.906 (23.01) ±.172 (4.37)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Metric equivalents are in parentheses.

FIGURE 1. Resistor styles RD31, RD33, RD35, RD37, and RD39.

Source: https://assist.dla.mil -- Downloaded: 20261O-17T21:59Z
Check the source to verify that this is the current version before use.

3.4 Continuous working voltage. The continuous working voltage applicable to each style shall be as specified in table II.

TABLE II. Continuous working voltages.

Style	Continuous working voltage
	Volts, maximum
RD31	525
RD33	1,380
RD35	2,275
RD37	3,675
RD39	7,875

3.5 Power rating. The power rating applicable to each style shall be as specified in table III.

TABLE III. Power ratings.

Style	Power rating
	Characteristic P
	Watts
RD31	7
RD33	13
RD35	25
RD37	55
RD39	115

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling, acceptance inspection, and test procedures. The sampling, acceptance inspection, and test procedures specified in tables VI and VII of MIL-R-11804 are applicable to this specification.

4.2 Dielectric withstanding voltage. The dielectric withstanding voltage test of MIL-R-11804 is applicable to this specification. The dielectric withstanding voltage for each style shall be as specified in table IV.

TABLE IV. Dielectric withstanding voltages.

Style	Dielectric withstanding voltage	
	At atmospheric pressure	At reduced barometric pressure
	Volts	Volts
RD31	1,000	500
RD33	1,000	500
RD35	1,000	500
RD37	1,500	500
RD39	2,000	500

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:59Z
Check the source to verify that this is the current version before use.

4.3 Insulation resistance. The insulation resistance test of MIL-R-11804 is applicable to this specification.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-R-11804.

6. NOTES

6.1 Notes. The notes specified in MIL-R-11804 are applicable to this specification.

6.2 Supplementary insulation. Supplementary insulation should be provided when potential to ground is greater than 500 volts.

6.3 Inactive for design. Resistors covered by this specification are for replacement only and not for new design.

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Army - AR
Navy - OS
Air Force - 17, 85, 99
DLA - ES

User activities:
Army - ME, AT, AV
Navy - MC, CG, AS, SH
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5905-0955-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:59Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS. The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE: MIL-R-11804/1C RESISTORS, FIXED, FILM (POWER TYPE), STYLES RD31, RD33, RD35, RD37, and RD39)

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-17T21:59Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoD - 304



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Cdr, US Army ERADCOM
ATTN: DELET-RP
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T21:59Z
Check the source to verify that this is the current version before use.