A-A-55611
30 JANUARY 1995
SUPERSEDING
MS45904B
6 FEBRUARY 1974

COMMERCIAL ITEM DESCRIPTION

WASHER, LOCK, INTERNAL AND EXTERNAL TOOTH


THE GENERAL SERVICES ADMINISTRATION HAS AUTHORIZED THIS COMMERCIAL ITEM DESCRIPTION FOR ALL FEDERAL AGENCIES

1. SCOPE: THIS COMMERCIAL ITEM DESCRIPTION (CID) DEPICTS THE REQUIREMENTS FOR AN INTERNAL OR EXTERNAL TOOTH LOCK WASHER.

2. SALIENT CHARACTERISTICS.

2.1. MATERIAL SHALL BE CARBON STEEL IN ACCORDANCE WITH ASME B18.21.1.

2.2. FINISH SHALL BE ZINC PLATING.

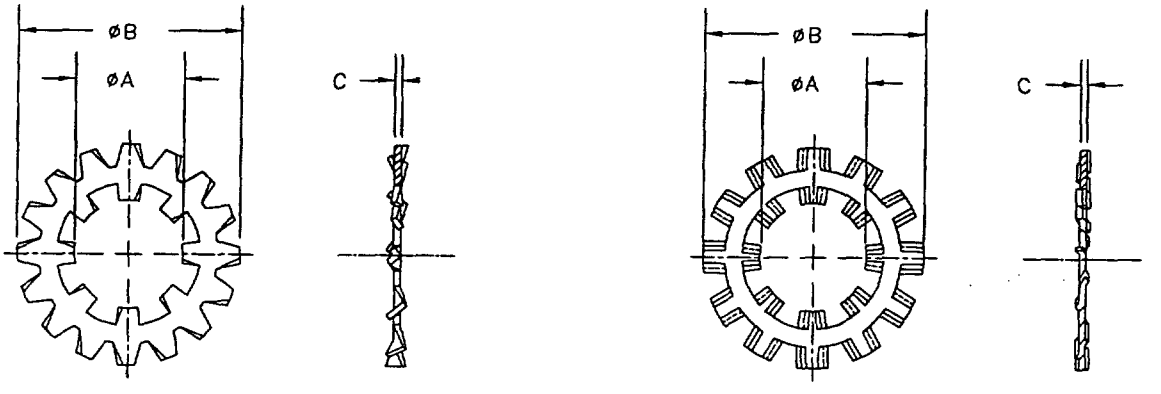

ACCEPTABLE DESIGNS

BENEFICIAL COMMENTS, RECOMMENDATIONS, ADDITIONS, DELETIONS, CLARIFICATIONS, ETC., AND DATA WHICH MAY IMPROVE THIS DOCUMENT SHOULD BE SENT TO: DEFENSE INDUSTRIAL SUPPLY CENTER. ATTN: DISC-EED, 700 ROBBINS AVENUE, PHILADELPHIA, PA 19111-5096.

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:55Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS.

DASH NO.	NOM. SIZE	ØA		ØB		C THICKNESS	
		MAX	MIN	MAX	MIN	MAX	MIN
51	.112 (#4)	.123	.115	.475	.460	.021	.016
52				.510	.495	.021	.017
53				.610	.580	.021	.017
54	.138 (#6)	.150	.141	.510	.495	.028	.023
55				.610	.580	.028	.023
56				.690	.670	.028	.023
57	.164 (#8)	.176	.168	.610	.580	.034	.028
58				.690	.670	.034	.028
59				.760	.740	.034	.028
60	.190 (#10)	.204	.195	.610	.580	.034	.028
61				.690	.670	.040	.032
62				.760	.740	.040	.032
63				.900	.880	.040	.037
64	.216 (#12)	.231	.221	.690	.670	.040	.032
65				.760	.725	.040	.032
66				.900	.880	.040	.032
67				.985	.965	.040	.037
68	.250 (1/4)	.267	.256	.760	.725	.040	.032
69				.900	.880	.040	.032
70				.985	.965	.045	.037
71				1.070	1.045	.045	.037

DASH NO.	NOM. SIZE	ØA		ØB		C THICKNESS	
		MAX	MIN	MAX	MIN	MAX	MIN
72	.3125 (5/16)	.332	.320	.900	.865	.040	.032
73				.985	.965	.045	.037
74				1.070	1.045	.050	.042
75				1.155	1.130	.050	.042
76	.375 (3/8)	.398	.384	.985	.965	.045	.037
77				1.070	1.045	.045	.042
78				1.155	1.130	.050	.042
79				1.260	1.220	.050	.042
80	.4375 (7/16)	.464	.448	1.070	1.045	.050	.042
81				1.155	1.130	.050	.042
82				1.260	1.220	.055	.047
83				1.315	1.290	.055	.047
84	.500 (1/2)	.530	.512	1.260	1.220	.055	.047
85				1.315	1.290	.055	.047
86				1.430	1.380	.060	.052
87				1.620	1.590	.067	.059
88	.5625 (9/16)	.596	.576	1.315	1.290	.055	.047
89				1.430	1.380	.060	.052
90				1.620	1.590	.067	.059
91				1.830	1.797	.067	.059
92	.625 (5/8)	.663	.640	1.410	1.380	.060	.052
93				1.620	1.590	.067	.059
94				1.830	1.797	.067	.059
95				1.975	1.935	.067	.059

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:55Z
Check the source to verify that this is the current version before use.

3. QUALITY CONFORMANCE PROVISIONS:

3.1. THE SUPPLIERS SHALL BE RESPONSIBLE FOR THOSE IN PROCESS CONTROLS AND INSPECTIONS NECESSARY TO SUPPLY A PRODUCT CONSISTENTLY CONFORMING TO THE REQUIREMENTS OF THIS DOCUMENT.

3.2. UPON REQUEST, THE SUPPLIER WILL CERTIFY WITH DOCUMENTED TEST/INSPECTION EVIDENCE, THAT THE PART SUPPLIED MEET THE REQUIREMENTS OF THIS DOCUMENT.

4. NOTES:

4.1. DIMENSIONS ARE IN INCHES.

4.2. THE PART IDENTIFYING NUMBER (PIN) SHALL CONSIST OF THE BASIC CID NUMBER PLUS A DASH NUMBER TAKEN FROM TABLE I.

EXAMPLE: AA55611 – 68

DASH NUMBER

BASIC CID NUMBER

AA55611–68 INDICATES: WASHER, LOCK, INTERNAL AND EXTERNAL TOOTH, 1/4" NOMINAL SIZE, CARBON STEEL, ZINC PLATING.

TABLE II. CROSS – REFERENCE TABLE.

CANCELLED MS PIN	REPLACEMENT CID PIN
MS45904 – * 1/	AA55611 – * 1/

1/ * REPRESENTS THE SAME DESIGNATION CODES FOR BOTH MS AND CID PINS.

MILITARY INTERESTS

CUSTODIANS

NAVY – OS
ARMY – AR
AIR FORCE – 82

PREPARING ACTIVITY

DLA–IS

(PROJECT: 5310–1981)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:55Z
Check the source to verify that this is the current version before use.