THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: NONE

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

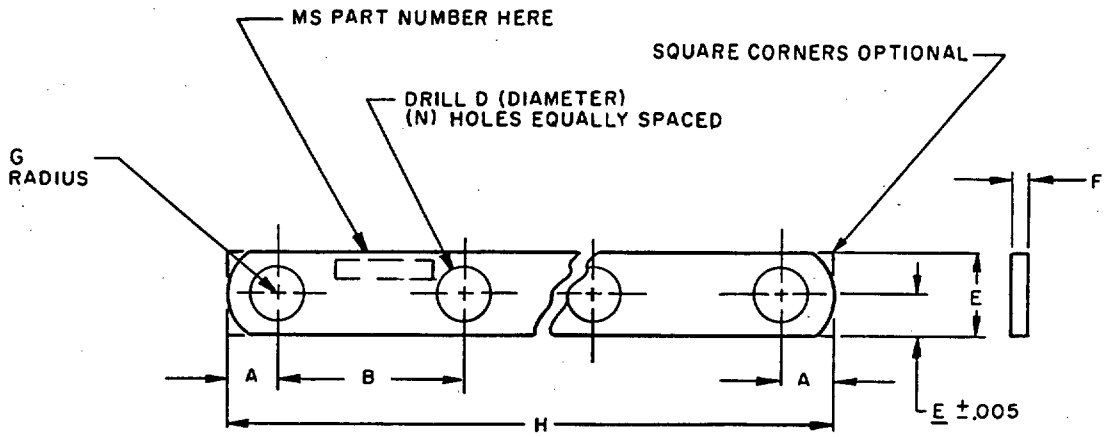


TABLE I. LINK TERMINAL, CONNECTING DETAILS.

DASH NO. (NOTE 3)				STUD SIZE	A ±.010 (D)	B (REQUIREMENT 6)	D ±.005	E ±.010	F ±.003	G ±.03	H REF	MAX CAPACITY IN AMPS
CADMIUM PLATE	SILVER PLATE (NOTE 7)	NICKEL PLATE	TIN PLATE									
-2-(N)	-2S-(N)	-2N-(N)	-2T-(N)	NO. 6	.219	.594	.147	.250	.032	.19	.594(N-1)+.438	40
-4-(N)	-4S-(N)	-4N-(N)	-4T-(N)	NO. 10	.219	.750	.201	.438	.051	.31	.750(N-1)+.438	70
-6-(N)	-6S-(N)	-6N-(N)	-6T-(N)	1/4	.312	1.500	.257	.625	.051	.50	1.500(N-1)+.625	90
-8-(N)	-8S-(N)	-8N-(N)	-8T-(N)	5/16, 3/8	.312	1.500	.386	.625	.051	.50	1.500(N-1)+.625	90
-10-(N)	-10S-(N)	-10N-(N)	-10T-(N)	NO. 8	.219	.750	.174	.350	.051	.31	.750(N-1)+.438	50

(D) TABLE II. METRIC CONVERSION.

INCH	mm	INCH	mm	INCH	mm
.003	.076	.190	4.826	.386	9.804
.005	.127	.201	5.105	.438	11.125
.010	.254	.219	5.563	.500	12.700
.030	.762	.250	6.350	.594	15.088
.032	.813	.257	6.528	.625	15.875
.051	1.295	.310	7.874	.675	17.145
.138	3.505	.312	7.925	.750	19.505
.147	3.734	.313	7.950	1.500	38.100
.164	4.166	.350	8.890		
.174	4.420	.375	9.525		

(D) DENOTES CHANGE

PREPARING ACTIVITY: NAVY-AS CUSTODIANS: ARMY- ER NAVY-AS AIR FORCE- 85 DLA- GS REVIEW: NAVY-EC, MC, SH AIR FORCE 11, 80 PROJECT NUMBER: 5940-1169	MILITARY SPECIFICATION SHEET TITLE LINK, TERMINAL, CONNECTING	SPECIFICATION SHEET NUMBER MS25226 15 SEP 94 REV D SUPERSEDING MS25226 C 13 JULY 1971 AMSC- N/A FSC 5940

DISTRIBUTION STATEMENT
A. Approved for public release; distribution is unlimited.

DD FORM 672 (REV 1988) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Document: https://assist.dla.mil -- Downloaded: 2026-10-23T15:06Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: NONE

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No.0704-0188

REQUIREMENTS:

(D) 1. MATERIAL: COPPER; BARS, RODS, AND SHAPES, IN ACCORDANCE WITH ASTM-B133 OR ASTM-B272. COPPER; SHEETS, STRIPS, PLATES AND ROLLED BARS IN ACCORDANCE WITH ASTM-B152.

2. FINISH: CADMIUM PLATE, SILVER PLATE, NICKEL PLATE OR TIN PLATE.

1/ a. CADMIUM PLATE, IN ACCORDANCE WITH QQ-P-416, CLASS 3, TYPE II, FOR MAXIMUM TEMPERATURE OF 450°F. NOT TO BE USED IN CONTACT WITH TITANIUM OR IN VACUUM APPLICATIONS INCLUDING OUTER SPACE.

b. SILVER PLATE, IN ACCORDANCE WITH QQ-S-365, MINIMUM THICKNESS .0002 INCH. NOT TO BE USED IN CONTACT WITH TITANIUM.

c. NICKEL PLATE, IN ACCORDANCE WITH QQ-N-290, TYPE V, MINIMUM THICKNESS .0005 INCH FOR EXTERIOR APPLICATION AND TYPE VII MINIMUM THICKNESS .0001 INCH FOR INTERNAL APPLICATION.

2/ d. TIN PLATE, IN ACCORDANCE WITH MIL-T-10727, TYPE I, MINIMUM THICKNESS .0005 INCH FOR 330°F MAXIMUM TEMPERATURE APPLICATIONS.

3. PART OR IDENTIFYING NUMBER (PIN).
EXAMPLE OF PIN: MS25226-4-3

MS25226 - 4 - 3

- 3 — BUS WITH 3 HOLES FOR USE WITH TERMINAL BLOCK ASSEMBLY INCORPORATING NUMBER 10 STUDS
- FINISH: NO LETTER - CADMIUM PLATE; S - SILVER PLATE; N - NICKEL PLATE; T - TIN PLATE
- 4 — DASH NUMBER, TABLE I
- MS25226 — BASIC PART NUMBER

(D) 4. IDENTIFICATION MARKING - EACH PART SHALL BE PERMANENTLY MARKED WITH THE PART NUMBER AS SHOWN ABOVE. THE LAST DIGIT OF THE PART NUMBER FOR THE NUMBER OF HOLES IS OPTIONAL.

5. DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± .010

(D) 6. TOLERANCE BETWEEN ANY HOLES OF THE BUS (B DIMENSION) SHALL BE ± .010 INCH (NONCUMULATIVE).

(D) 7. THE CUMULATIVE TOLERANCE BETWEEN THE TWO END MOUNTING HOLES SHALL BE A MAXIMUM OF .003 INCH PER INCH OF LENGTH.

(D) 1/ CADMIUM PLATED TERMINAL LINKS ARE INACTIVE FOR NEW DESIGN.

(D) 2/ THE PLATING SHALL NOT BE GREATER THAN 97% PURE TIN TO PREVENT DENDRITE (TIN WHISKER) FORMATION. LEAD OR OTHER SUITABLE MODIFIERS SHALL BE USED.

PREPARING ACTIVITY: NAVY-AS CUSTODIANS: ARMY-ER NAVY-AS AIR FORCE-85 DLA-GS REVIEW: NAVY-EC, MC, SH AIR FORCE 11, 80 PROJECT NUMBER: 5940-1169	MILITARY SPECIFICATION SHEET TITLE LINK, TERMINAL, CONNECTING	SPECIFICATION SHEET NUMBER MS25226 15 SEP 94 REV D SUPERSEDING MS25226 C 13 JUL 1971 AMSC- N/A FSC 5940
DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED		Page 2 of 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:06Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: NONE

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No.0704-0188

NOTES:

(D) 1. BREAK ALL SHARP EDGES.

(D) 2. METRIC EQUIVALENTS (TO THE NEAREST .01 MM) ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH - 25.4 MM.

3. (N) INDICATES NUMBER OF HOLES IN BUS.

4. SILVER PLATED PARTS ARE NOT TO BE USED FOR AIR FORCE ACQUISITION.

5. FOR TERMINAL BLOCK ASSEMBLY, USE MS27212.

6. PART NUMBER MS25226-2 (N) THROUGH -8-(N), REPLACE AND ARE INTERCHANGEABLE WITH AN3433-2-(N) THROUGH AN3433-8-(N).

7. FOR DESIGN FEATURE PURPOSES, THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER ACQUISITION DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

PREPARING ACTIVITY: NAVY-AS CUSTODIANS: ARMY- ER NAVY-AS AIR FORCE- 85 DLA- GS REVIEW: NAVY-EC, MC, SH AIR FORCE 11, 80 PROJECT NUMBER: 5940-1169	MILITARY SPECIFICATION SHEET TITLE LINK, TERMINAL, CONNECTING	SPECIFICATION SHEET NUMBER MS25226 15 SEP 94 REV D SUPERSEDING MS25226 C 13 JUL 1971 AMSC- N/A FSC 5940
DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED		Page 3 of 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:06Z
Check the source to verify that this is the current version before use.