FED SUP CLASS
5307

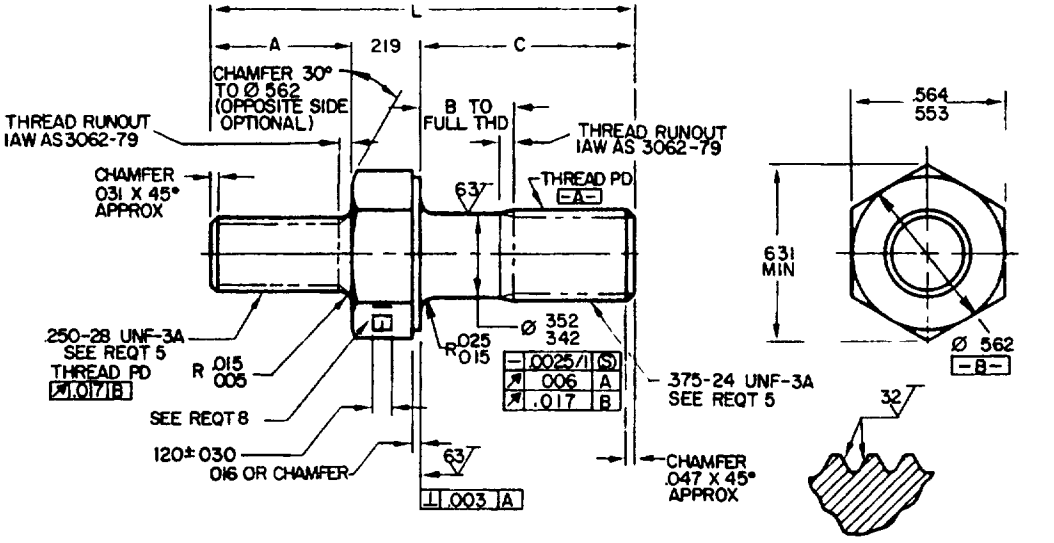


TABLE I DASH NUMBERS AND DIMENSIONS

DASH NUMBER	A	B +.000 -.060	C	L REF	APPROX WEIGHT LBS/100
-001	.438	1/	750	1 406	4 16
-002	438	1/	.812	1 469	4 32
-003	.438	1/	.875	1 531	4.49
-004	438	1/	.938	1.594	4 66
-005	438	1/	1 000	1 656	4 83
-006	438	1/	1 062	1 719	5 00
-007	.438	125	1 125	1.781	5 17
-008	438	188	1 188	1 844	5 34
-009	438	.250	1.250	1 906	5 49
-010	438	312	1 312	1 969	5 66
-011	.438	375	1 375	2 031	5.82
-012	438	438	1 438	2 094	5 99
-013	438	.500	1 500	2 156	6 16
-014	438	562	1 562	2 219	6 33
-015	438	.625	1.625	2 281	6 50
-016	438	688	1.688	2 344	6 67
-017	.438	750	1 750	2 406	6 82
-018	.438	.812	1.812	2 469	6 99
-019	438	875	1 875	2.531	7 15
-020	438	938	1.938	2 594	7 32
-021	438	1 000	2 000	2 656	7 49
-022	438	1 062	2 062	2 719	7 66
-023	438	1 125	2 125	2 781	7 83
-024	438	1.250	2.250	2 906	8 15
-025	438	1 375	2 375	3 031	8 49
-026	438	1.500	2 500	3 156	8.82
-027	438	1.625	2 625	3 281	9 16
-028	438	1 750	2 750	3 406	9 48
-029	438	1.875	2.875	3 531	9 82
-030	438	2 000	3 000	3.656	10 15

DASH NUMBER	A	B +.000 -.060	C	L REF	APPROX WEIGHT LBS/100
-050	500	1/	750	1 469	4.32
-051	500	1/	812	1 531	4 49
-052	500	1/	875	1 594	4 66
-053	500	1/	938	1.656	4.83
-054	500	1/	1 000	1 719	5 00
-055	500	1/	1 062	1 781	5.17
-056	500	125	1 125	1.844	5.34
-057	500	188	1 188	1 906	5 49
-058	500	250	1 250	1 969	5.66
-059	500	312	1 312	2 031	5 82
-060	500	375	1 375	2.094	5 99
-061	500	438	1 438	2 156	6 16
-062	500	500	1 500	2 219	6 33
-063	500	562	1 562	2.281	6 50
-064	500	625	1 625	2 344	6.67
-065	500	688	1 688	2 406	6 82
-066	500	750	1 750	2 469	6.99
-067	500	812	1 812	2 531	7.15
-068	500	875	1 875	2 594	7.32
-069	500	938	1 938	2 656	7 49
-070	500	1 000	2 000	2 719	7 66
-071	500	1 062	2 062	2 781	7 83
-072	500	1 125	2 125	2 844	8 15
-073	500	. 250	2 250	2 969	8 49
-074	500	1 375	2 375	3 094	8.82
-075	500	. 500	2 500	3 219	9 16
-076	500	1.625	2 625	3 344	9 48
-077	500	1 750	2 750	3 469	9 82
-078	500	1 875	2 875	3 594	10.15
-079	500	2 000	3 000	3 719	10 21

(B) ENTIRE STANDARD REVISED

P A NAVY-AS Other Cust ARMY-AR AIR FORCE-99	INTERNATIONAL INTEREST	TITLE STUD, SHOULDERED AND STEPPED, HEXAGON WRENCHING, STEEL, .250-28 UNF-3A X .375-24 UNF-3A	MILITARY STANDARD MS9307
PROCUREMENT SPECIFICATION AMS 7452-73	SUPERSEDES:		PAGE 1 OF 3

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5307-0441

APPROVED 24 FEB 60 REVISED (B) 22 MAY 86

REVIEWER ACTIVITIES:
AIR FORCE-82
DLA-IS

USER ACTIVITIES:

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense
Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

AMSC N/A

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:14Z
Check the source to verify that this is the current version before use.

TABLE I DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	A	B +.000 - 060	C	L REF	APPROX WEIGHT LBS/100
-100	.562	1/	750	1 531	4.49
-101	562	1/	.812	1.594	4 66
-102	562	1/	.875	1.656	4.83
-103	.562	1/	.938	1.719	5.00
-104	562	1/	1.000	1.781	5 17
-105	.562	1/	1.062	1 844	5 34
-106	.562	125	1.125	1 906	5.49
-107	562	188	1.188	1 969	5 66
-108	.562	.250	1.250	2 031	5.82
-109	.562	.312	1 312	2 094	5.99
-110	562	.375	1.375	2.156	6 16
-111	.562	438	1 438	2 219	6 33
-112	.562	500	1.500	2 281	6 50
-113	562	562	1.562	2 344	6 67
-114	562	.625	1.625	2 406	6.82
-115	.562	688	1 688	2 469	6 99
-116	.562	750	1.750	2 531	7.15
-117	.562	812	1 812	2 593	7 32
-118	562	.875	1.875	2 656	7 49
-119	562	938	1.938	2.719	7 66
-120	.562	1 000	2 000	2.781	7 83
-121	.562	1 062	2.062	2 844	8 15
-122	562	1.125	2.125	2 906	8 49
-123	.562	1 250	2.250	3.031	8 82
-124	.562	1.375	2 375	3.156	9.16
-125	562	1.500	2 500	3.281	9 48
-126	562	1.625	2 625	3.406	9 82
-127	562	1 750	2.750	3.531	10 15
-128	562	1.875	2 875	3 656	10 21
-129	562	2 000	3 000	3.781	10.27

DASH NUMBER	A	B + 000 - 060	C	L REF	APPROX WEIGHT LBS/100
-150	625	1/	750	1 594	4 66
-151	.625	1/	.812	1 656	4 83
-152	625	1/	875	1 719	5 00
-153	625	1/	938	1 781	5 17
-154	625	1/	1 000	1 844	5 34
-155	625	1/	1 062	1 906	5 49
-156	625	125	1 125	1 969	5 66
-157	.625	188	1 188	2 031	5 82
-158	625	250	1.250	2 094	5 99
-159	625	312	1.312	2 156	6 16
-160	625	375	1 375	2 219	6 33
-161	625	438	1 438	2 281	6 50
-162	625	500	1 500	2.344	6 67
-163	625	562	1.562	2 406	6 82
-164	625	625	1 625	2 469	6 99
-165	625	688	1 688	2 531	7 15
-166	625	750	1 750	2 594	7 32
-167	625	812	1 812	2 656	7 49
-168	625	875	1 875	2 719	7 66
-169	625	938	1 938	2 781	7 83
-170	625	1 000	2 000	2 844	8 15
-171	625	1 062	2 062	2 906	8 49
-172	625	1 125	2 125	2.969	8 82
-173	625	1 250	2 250	3.094	9 16
-174	.625	1 375	2 375	3 219	9 48
-175	625	1 500	2 500	3 344	9 82
-176	.625	1 625	2 625	3 469	10 15
-177	625	1 750	2 750	3 594	10 21
-178	.625	1 875	2 875	3 719	10 27
-179	.625	2 000	3 000	3 844	10 35

1/ THREAD TO HEAD MAXIMUM TWO INCOMPLETE THREADS

REQUIREMENTS:

1. MATERIAL: STEEL IN ACCORDANCE WITH AMS 6322-80
2. FINISH CADMIUM PLATE IN ACCORDANCE WITH AMS 2400-80
3. HARDNESS. 26-32HRC
4. DIMENSIONING AND TOLERANCING DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14 5M
5. THREADS THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2 ACCEPTABILITY OF SCREW THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/20, SYSTEM 22
6. SURFACE TEXTURE SURFACE TEXTURE SHALL BE IN ACCORDANCE WITH AS291-64
7. MAGNETIC PARTICLE INSPECTION. MAGNETIC PARTICLE INSPECTION SHALL BE IN ACCORDANCE WITH AMS 2640-83
8. MARKING MATERIAL IDENTIFICATION AND MARKING IN ACCORDANCE WITH AMS 2800-76 DEPRESSED .010 MAX
9. TOLERANCE UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ±5°
10. EDGES BREAK SHARP EDGES .003 - .015, UNLESS OTHERWISE SPECIFIED
11. PART NUMBER THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE MS9307-001
- -001 — DASH NUMBER
- MS9307 — BASIC MS NUMBER

MS9307-001 INDICATES STUD, SHOULDERED AND STEPPED, HEXAGON WRENCHING, STEEL, 250-28 UNF-3A X .375-24 UNF-3A, LENGTH 1 406

APPROVED 24 FEB 60 REVISED (B) FOR CHANGES SEE PAGES 1,2 AND 3

REVIEWER ACTIVITIES:
AIR FORCE-82
DLA-IS

USER ACTIVITIES:

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable

P A NAVY-AS Other Cust ARMY-AR AIR FORCE-99	INTERNATIONAL INTEREST	TITLE STUD, SHOULDERED AND STEPPED, HEXAGON WRENCHING, STEEL, .250-28 UNF-3A X .375-24 UNF-3A	MILITARY STANDARD MS9307
PROCUREMENT SPECIFICATION AMS 7452-73	SUPERSEDES:		PAGE 2 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:14Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5307

NOTES:

1. ALL DIMENSIONS ARE IN INCHES
2. DO NOT USE UNASSIGNED PART NUMBERS
3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
4. REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN
5. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION
6. AS AND AMS ARE SAE PUBLICATIONS.

USER ACTIVITIES

REVIEWER ACTIVITIES
AIR FORCE-82
DLA-IS

APPROVED 24 FEB 60 REVISED (B) FOR CHANGES SEE PAGES 1,2 AND 3

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P A NAVY-AS Other Cust ARMY-AR AIR FORCE-99	INTERNATIONAL INTEREST	TITLE STUD, SHOULDERED AND STEPPED, HEXAGON WRENCHING, STEEL, .250-28 UNF-3A X .375-24 UNF-3A	MILITARY STANDARD MS9307
PROCUREMENT SPECIFICATION AMS 7452-73	SUPERSEDES:		PAGE 3 OF 3

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5307-0441

U S. GOVERNMENT PRINTING OFFICE: 1984 - 605-019/4384

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:14Z
Check the source to verify that this is the current version before use.