INCH-POUND

MS27342E
~~12 July 2002~~
SUPERSEDING
MS27342D
2 January 1976

DETAIL SPECIFICATION SHEET

CONNECTORS, ADAPTER, ELECTRICAL, SERIES I AND II

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-38999.

Inactive for new design.

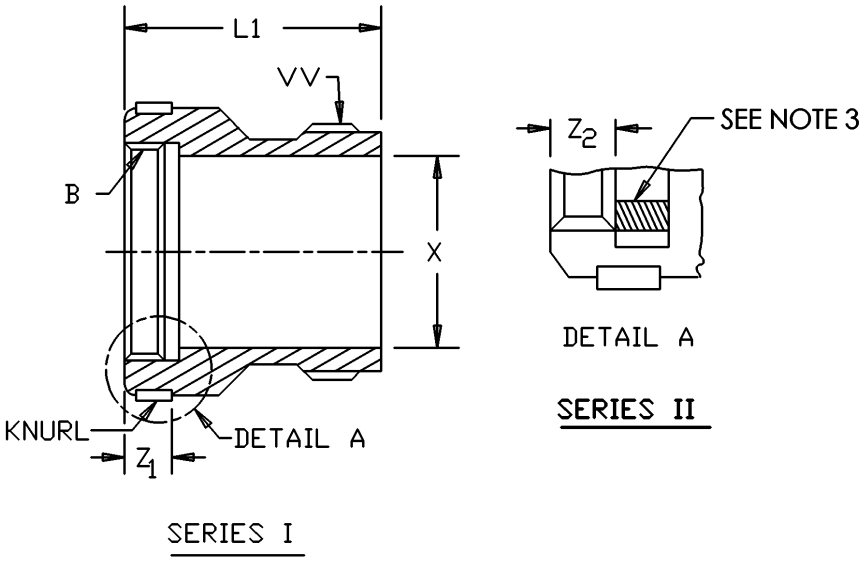

FIGURE 1. ~~Open adapter (-1)~~.

~~DISTRIBUTION STATEMENT A~~. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:22Z
Check the source to verify that this is the current version before use.

Shell size series I	Shell size series II	B Thread class 2B UNEF	L_1 max	X dia min	Z_1 +.000, -.015 series I	Z_2 +.005, -.010 series II	V V Thread class 2A UNEF
9	8	7/16-28	.688	.281	.219	.114	1/2-28
11	10	9/16-24		.406			5/8-24
13	12	11/16-24		.531			3/4-20
15	14	13/16-20		.656			7/8-20
17	16	15/16-20		.781			1-20
19	18	1 1/16-18		.875			1 3/16-18
21	20	1 3/16-18	.750	1.000			
23	22	1 5/16-18		1.125			1 7/16-18
25	24	1 7/16-18		1.250			

NOTES:
1. Dimensions are in inches.
2. Materials: Adapter body: aluminum alloy.
3. On series II adapters, the Z_2 dimension may be achieved by two-piece construction.

FIGURE 1. ~~Open adapter (-1)~~ - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:22Z
Check the source to verify that this is the current version before use.

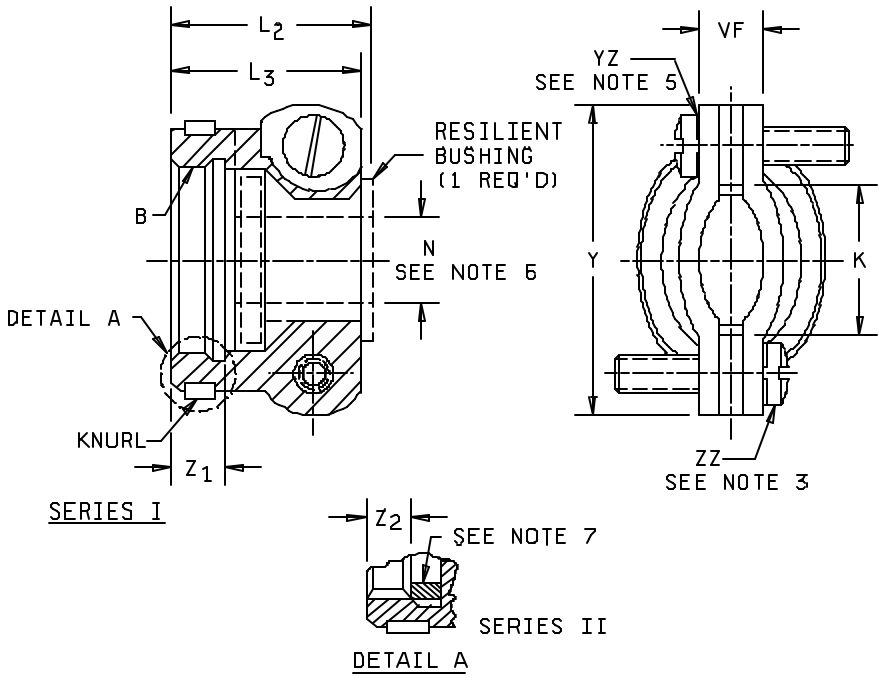

FIGURE 2. ~~Strain relief adapter (-2)~~.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:22Z
Check the source to verify that this is the current version before use.

Shell size series I	Shell size series II	B Thread class 2B UNEF	N free dia +.010 -.025	L_2 max	L_3 max	X dia min open	Y max
9	8	7/16-28	.125	.875	.781	.234	.628
11	10	9/16-24	.188			.297	.981
13	12	11/16-24	.312			.422	1.016
15	14	13/16-20	.375	.938	.844	.547	1.141
17	16	15/16-20	.500			.609	1.203
19	18	11/16-18	.625			.734	1.469
21	20	13/16-18		1.000	.906		
23	22	15/16-18	.750			.922	1.656
25	24	17/16-18	.800			.964	1.750

Shell size series I	Shell size series II	Z_1 +.000, -.015 Series I	Z_2 +.005, -.010 Series II	VF max closed	ZZ Screws MS35271 see note 3	YZ Lockwashers see note 5
9	8	.219	.114	.187	-30	MS35338-98 or MS35338-41
11	10					
13	12			.261		
15	14			.325	-32	AN936-A6B or AN936-A6
17	16			.356		
19	18			.456	-48	MS35338-99 or MS35338-42
21	20			.519		
23	22				-50	AN936-A8B or AN936-A8
25	24			.657	see note 4	

NOTES:

1. Dimensions are in inches
2. Materials: Adapter body and clamping bars: Aluminum alloy. Resilient bushing: Silicone.
3. Drill hole in head is optional.
4. Except that length of screw under head shall be 1.125 +.000 -.062.
5. Lockwashers may be captivated.
6. Use MS3420 bushing if reduced opening is required.
7. On series II adapters, the Z_2 dimension may be achieved by two-piece construction.

FIGURE 2. ~~Strain Relief Adapter (-2)~~ - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:22Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures 1 and 2.
Interface dimensions shall conform to MIL-DTL-38999.
Mating connectors: MIL-DTL-38999 series I and series II.

Qualification:

Examination of product.
Mating and unmating forces.
Humidity.
Salt spray (corrosion).
Altitude immersion.

Group A sampling inspection. 100% inspection is not applicable. Sampling inspection shall be in accordance with table I:

TABLE I. ~~Group A sampling plan~~.

Lot size	Sample size
1 to 13	100 percent
14 to 150	13 units
151 to 280	20 units
281 to 500	29 units
501 to 1,200	34 units
1,201 to 3,200	42 units

Part or Identifying Number (PIN) example:

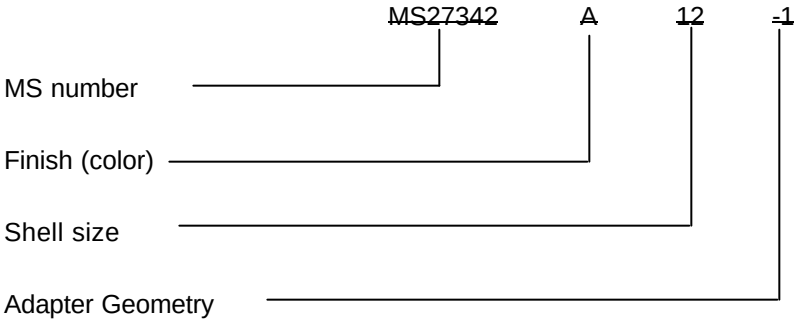

-1: open adapter
-2: strain relief adapter

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:22Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 11
DLA - CC

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5935-4390)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:22Z
Check the source to verify that this is the current version before use.