MILITARY STANDARD


MIL-STD-1320-154
(NAVY)

2 JANUARY 1975

TRUCKLOADING OF HAZARDOUS MATERIALS
CHARGE, PROPELLING, 6"/47 IN CARTRIDGE TANK MK 4
IN PALLET ADAPTER MK 18 MODS
FLEET ISSUE UNIT LOAD

UNIT LOAD DATA

UNIT LOAD DRAWING	WR-547
NUMBER OF TANKS PER UNIT LOAD	14
DIMENSIONS	45 1/2 L x 39 3/8 W x 40 3/8 H
WEIGHT (APPROX)	1317 LBS
CUBE	41 8 CU FT
DOT HAZARD CLASSIFICATION	EXPLOSIVES B

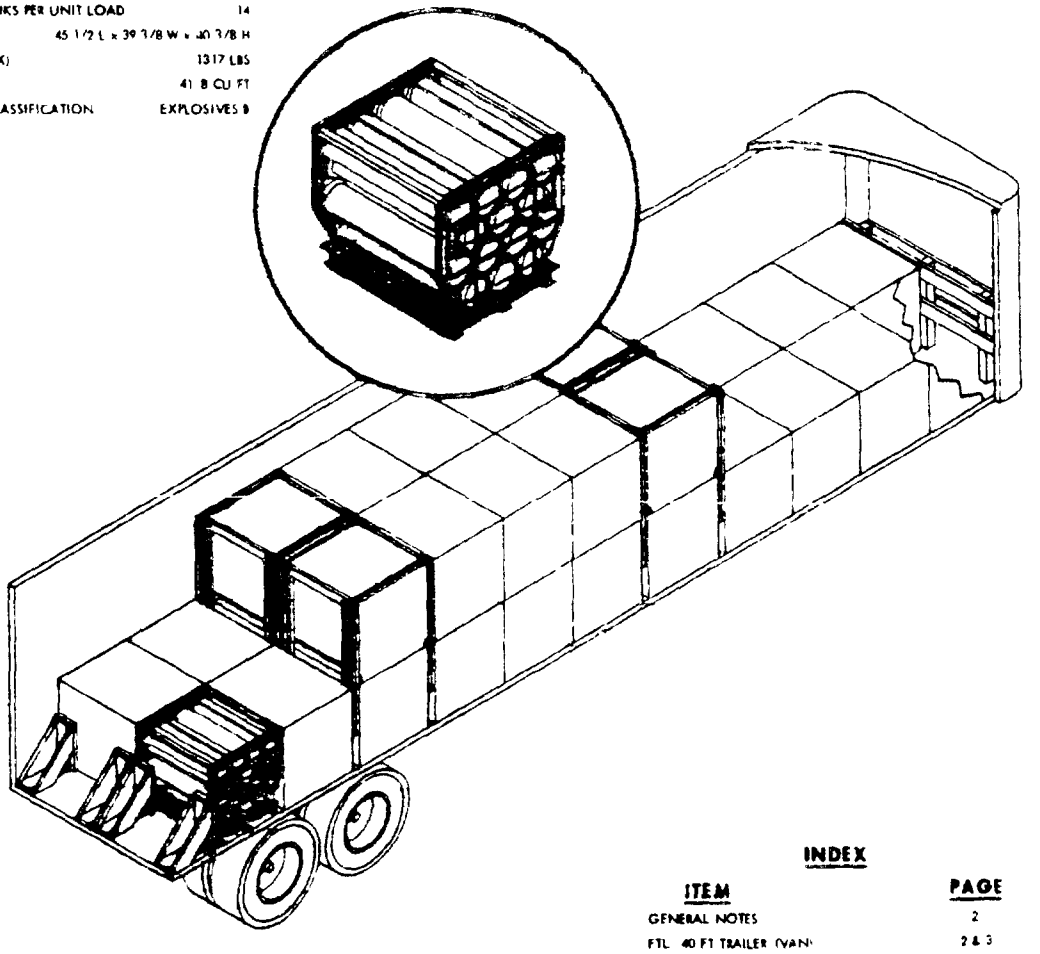

NOTES

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING CONTAINER-LOADING AND CARLOADING MILITARY STANDARDS REFER TO INDEX TO STANDARDS MIL-HDBK-236 (NAVY)

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL 40 FT TRAILER (VAN)	2 & 3
LTL 40 FT TRAILER (VAN)	4 & 5
UNITIZING	6

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENTS ONLY

M S Leary NWHL 1/6/75
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

R E Hill 1/6/75
SIGNATURE SEASYSCOM, BY DIRECTION DATE

ORIGINATOR T R Conroy
SIGNATURE


NAVAL WEAPONS HANDLING LABORATORY
NAD EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:45Z
Check the source to verify that this is the current version before use.


GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING PROPELLING CHARGE 6 47 IN CARTRIDGE TANK MK 4 WHEN PALLETIZED IN ACCORDANCE WITH FLEET ISSUE UNIT LOAD WR-54 7
2. PROCEDURES AND PRACTICES DESCRIBED HEREIN ARE INTENDED FOR 40 FT VAN TRAILERS WITH THE TRAILERS TANDEM AXLES LOCATED IN THE WESTERN POSITION (A THE EXTREME REAR OF THE TRAILER
3. TO PREVENT LONGITUDINAL MOVEMENT OF UNIT LOADS WHEN THERE IS A SECOND LAYER THE UNIT LOADS SHALL BE UNITIZED (SEE UNITIZING DETAIL PAGE 6) WHERE THE LOAD CHANGES FROM TWO LAYERS HIGH TO ONE LAYER HIGH
4. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS
5. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED ATTACH SHIPPING DOCUMENTS TO INSIDE OF TRAILER IN AN ACCESSIBLE AREA AND CLOSE AND SEAL TRAILER DOORS ATTACH EXPLOSIVES II PLACARD TO BOTH SIDES BACK OF TRAILER AND FRONT OF TRACTOR
6. APPLICABLE MATERIAL SPECIFICATIONS DUNNAGE LUMBER MM-L-751 NAILS FF-N-105 TYPE II, STYLE 10 COMMON BRIGHT STRAPPING QQ-S-781 TYPE I CLASS A
7. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY


FTL 40 FT TRAILER (VAN)

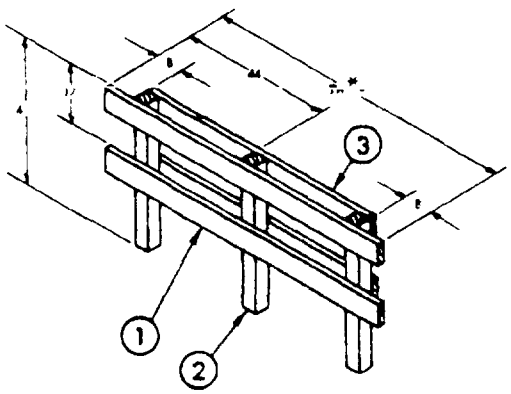

DETAIL A
FRONT BULKHEAD
1 REQUIRED

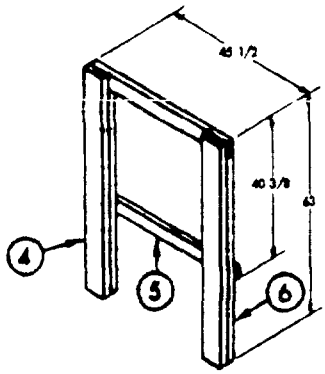


DETAIL B
STRAPPING BOARD ASSEMBLY
8 REQUIRED

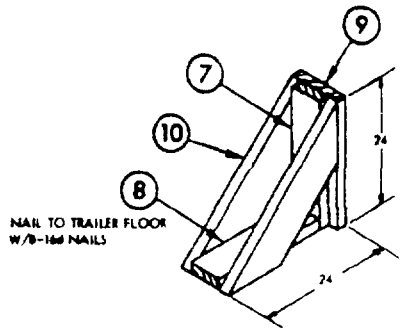


DETAIL C
REAR BRACE ASSEMBLY
4 REQUIRED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:45Z
Check the source to verify that this is the current version before use.

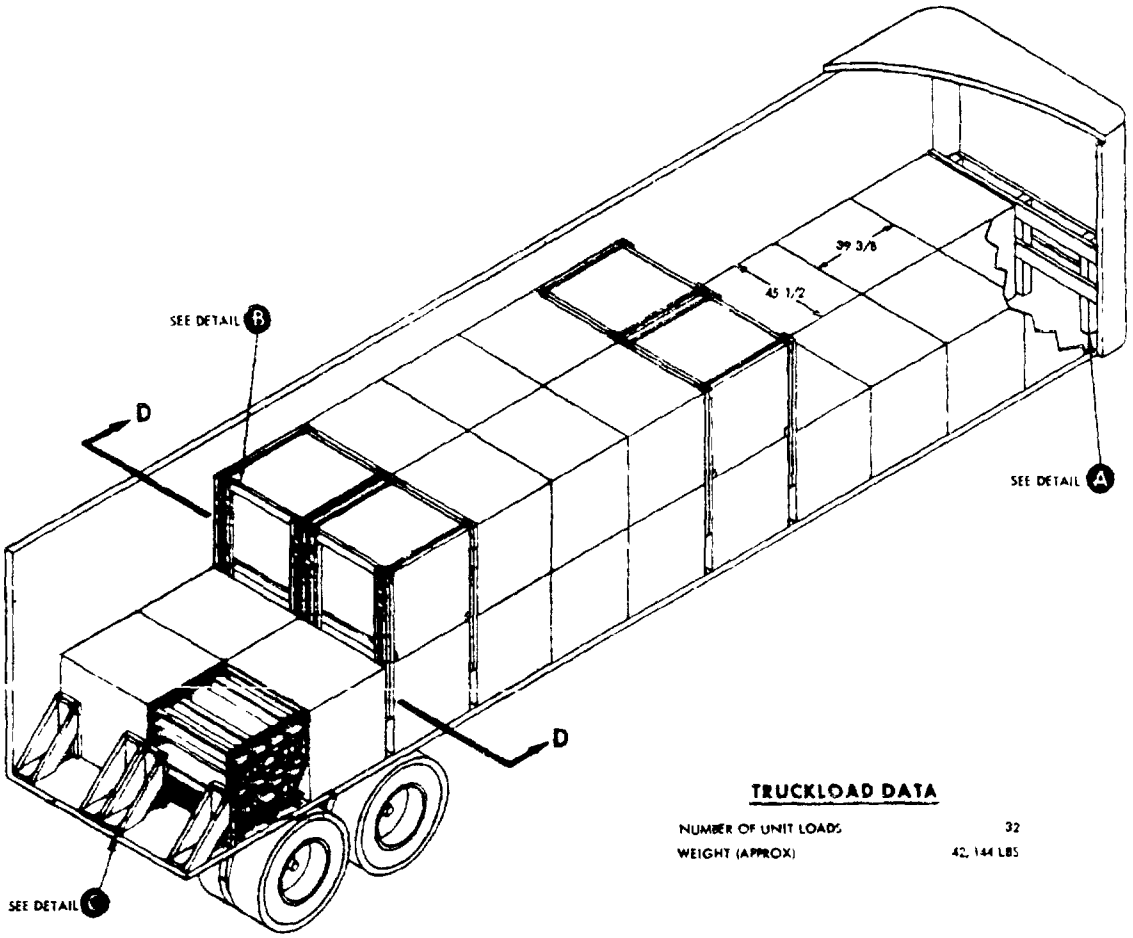

TRUCKLOAD DATA

NUMBER OF UNIT LOADS	32
WEIGHT (APPROX)	42, 144 LBS

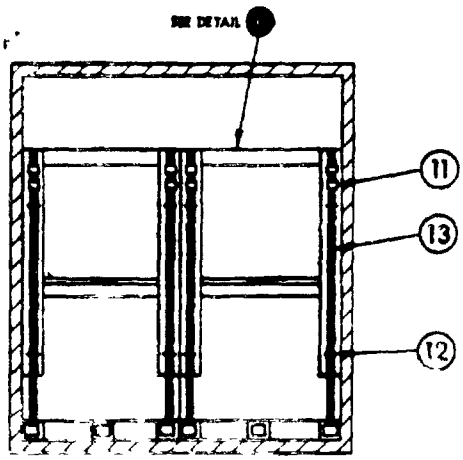

SECTION D-D

*Tw = TRAILER WIDTH

PIECE NO	DESCRIPTION	SIZE	NO PCS REQD	NAIL TO	NUMBER NAILS	SIZE NAILS
13	STRAPPING	1 1/4 x .035 x 20 FT ±	8	-	-	
12	STAPLE	FOR 1 1/4 STRAP	32	-		-
11	SEAL	FOR 1 1/4 STRAP	16	-	-	-
10	BRACE DIAGONAL	2 x 6 x TO SUIT	8	7 & 8	4/JOINT	12d
9	BRACE BACKUP	2 x 10 x 24	4	SEE 7	-	
8	BRACE CLEAT	2 x 6 x 21	4	SEE DETAIL C		
7	BRACE UPRIGHT	2 x 6 x 24	4	8	5	12d
				5	-	10d
6	UPRIGHT	2 x 6 x 59 1/2	16	SEE 4	-	
5	CROSSMEMBER	2 x 4 x 45 1/2	16	4 & 6	3/JOINT	10d
4	UPRIGHT	2 x 6 x 63	16	LAMINATE TO 6	4/JOINT	10d
3	FWD HORIZONTAL	2 x 6 x TO SUIT	2	2	3 JOINT	12d
2	VERTICAL	4 x 4 x 41	3	SEE 1 & 2	-	-
1	AFT HORIZONTAL	2 x 6 x Tw*-1	2	2	3 JOINT	12d





LIST OF MATERIALS AND NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:45Z
Check the source to verify that this is the current version before use.

LTL 40 FT TRAILER (VAN)

1 WHEN REQUIRED TO SHIP LESS-THAN-TRUCKLOAD SELECT THE CORRECT LOAD PATTERN FOR THE NUMBER OF UNIT LOADS TO BE SHIPPED FROM TABLE I

TABLE I


NO. OF UNIT LOADS	LOAD PATTERN*	FWD
31		
27		
23		
30		
26		
22		
29		
25		
21		
28		
24		
20 OR LESS	POSITION UNIT LOADS IN TRAILER USING A "DOUBLE ROW" PATTERN	

* LOAD PATTERN SHOWS FLOOR PLAN FOR TRAILER. NUMBER IN BLOCKS INDICATES NUMBER OF UNIT LOADS IN LAYER. ALL UNIT LOADS ARE POSITIONED IN THE TRAILER [illegible] THE 45 1/2 INCH DIMENSION ACROSS THE TRAILER.

2 FOR ALL LTL PATTERNS USE REAR BRACE ASSEMBLY, DETAIL G, TWO PER ROW BEARING AGAINST PALLET ADAPTER


3 THE LTL SHOWN ON PAGE 5 IS FOR 23 UNIT LOADS AND SHOWS THE CORRECT BLOCKING AND BRACING FOR A LOAD OF THIS QUANTITY

4 ACTUAL SHIPPING REQUIREMENTS WILL DETERMINE THE NUMBER OF UNIT LOADS TO BE SHIPPED. THE LOAD PATTERN, BLOCKING AND BRACING SHALL BE IN ACCORDANCE WITH THE APPROPRIATE PARTS OF THIS MILITARY STANDARD AND THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY).

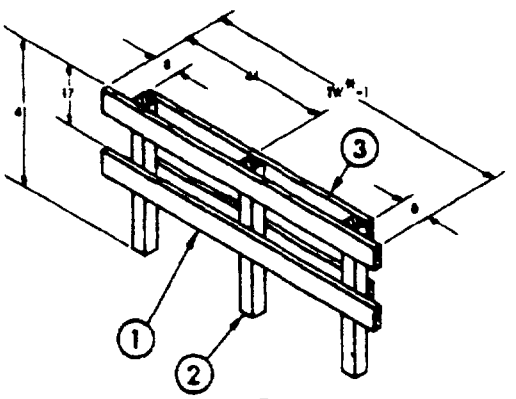

DETAIL E


FRONT BULKHEAD
1 REQUIRED

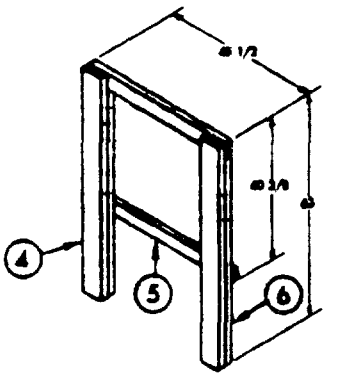

DETAIL F


STRAPPING BOARD ASSEMBLY
4 REQUIRED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:45Z
Check the source to verify that this is the current version before use.

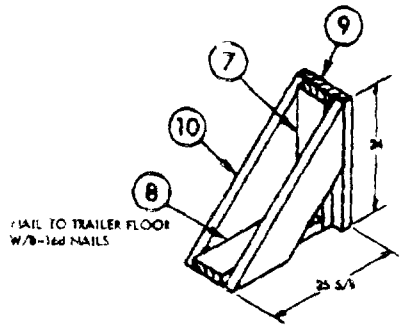


DETAIL G

REAR BRACE ASSEMBLY REQUIRED

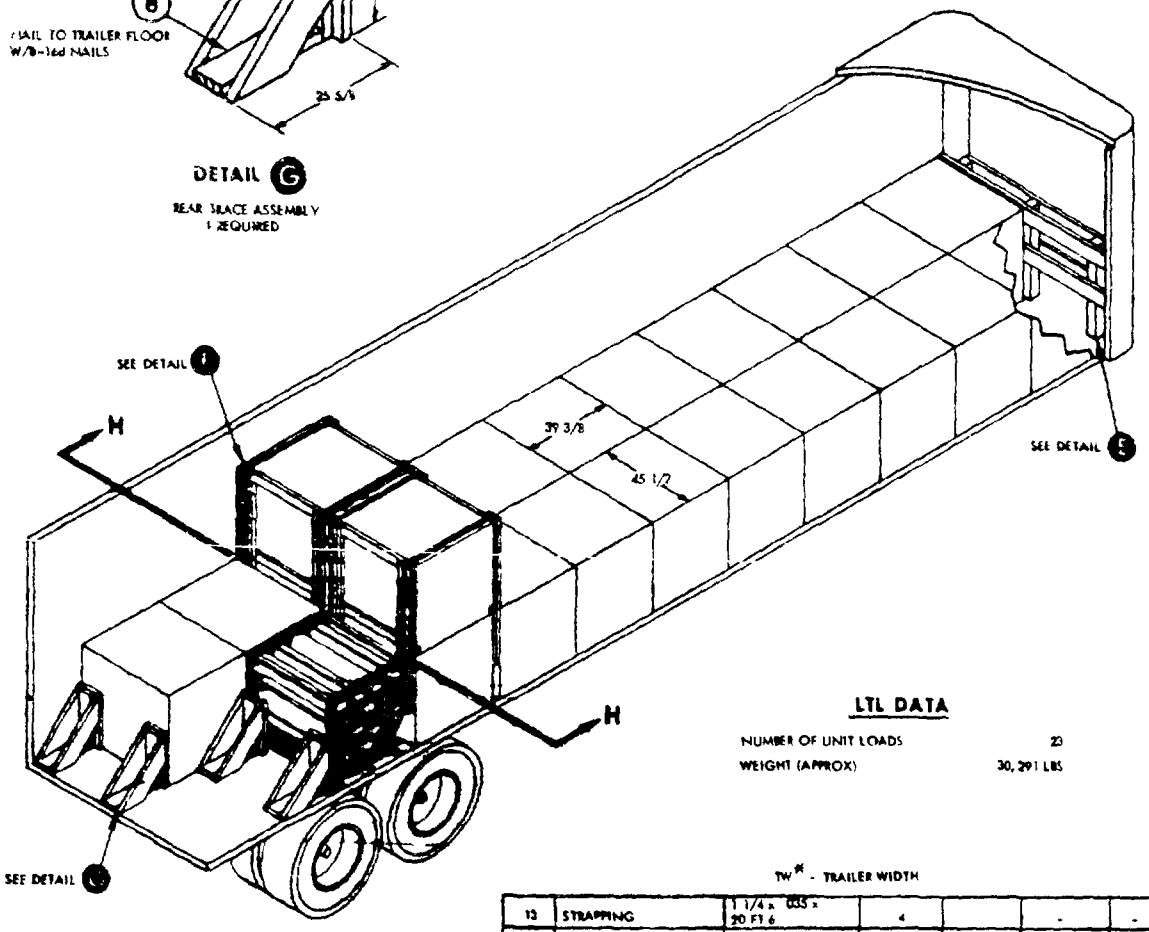

LTL DATA

NUMBER OF UNIT LOADS	23
WEIGHT (APPROX)	30,291 LBS

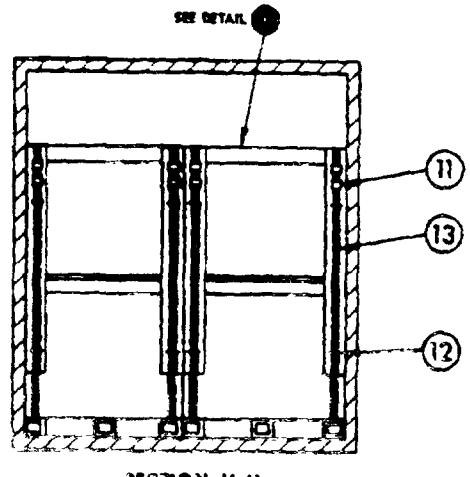

SECTION H-H

TW* - TRAILER WIDTH


PIECE NO	DESCRIPTION	SIZE	NO PCS REQD	NAIL TO	NAILS NUMBER	NAILS SIZE
13	STRAPPING	1 1/4 x .035 x 20 FT 6	4		-	-
12	STAPLE	FOR 1 1/4 STRAP	16		-	-
11	SEAL	FOR 1 1/4 STRAP	8	-	-	-
10	BRACE DIAGONAL	2 x 6 x TO SUIT	8	7 & 8	4/JOINT	12c
9	BRACE BACKUP	2 x 10 x 24	4	SEE 7		-
8	BRACE CLEAT	2 x 6 x 22 5/8	4	SEE DETAIL G		
7	BRACE UPRIGHT	2 x 6 x 24	4	8	3	12d
				9	6	10d
6	UPRIGHT	2 x 6 x 59 1/2	8	SEE 4		-
5	CROSSMEMBER	2 x 4 x 45 1/2	8	SEE 4 & 6	3/JOINT	10d
4	UPRIGHT	2 x 6 x 63	8	LAMINATE TO 6	4/JOINT	10d
3	FWD HORIZONTAL	2 x 6 x TO SUIT	4	2	3 JOINT	12d
2	VERTICAL	4 x 4 x 41	3	SEE 1 & 2		
1	AFT HORIZONTAL	2 x 6 x TW*-1	2	2	3/JOINT	12d

LIST OF MATERIALS AND NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:45Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE

1. WHEN REQUIRED BY THE FTL OR LTL REQUIREMENTS OF THIS MIL-STD THE TWO HIGH STACKED UNIT LOADS SHALL BE STRAPPED AS SHOWN.
2. THE STRAPPING BOARD ASSEMBLY SHALL BE FLUSH WITH THE TOP OF THE STACKED UNIT LOADS WITH THE CENTER HORIZONTAL RESTING ON THE TOP FRAME OF THE BOTTOM UNIT LOAD.
3. THE 1 1/4 INCH STEEL STRAPS POSITIONED AS SHOWN ENCIRCLE THE STACKED UNIT LOADS AND PASS UNDER THE DECK OF THE BOTTOM PALLET WITH THE STRAPS HOLDING THE STRAPPING BOARD ASSEMBLY IN PLACE.
4. TENSION STRAPS AND SEAL WITH TWO DOUBLE CRIMPED SEALS. SECURE EACH STRAP TO THE UPRIGHTS WITH FOUR 1 1/4 INCH STAPLES.

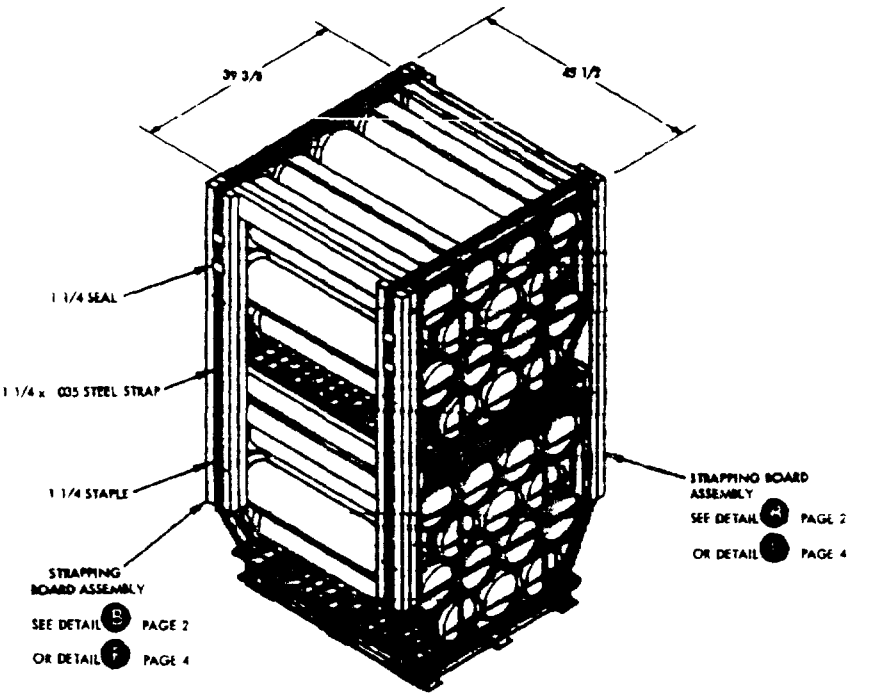

REVIEW ACTIVITIES
NAVY - OS

PREPARING ACTIVITY
NAVY - OS
(PROJECT NO. 8140-N258)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:45Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding Officer
Naval Weapons Station Earle (803)
Naval Weapons Handling Laboratory
Colts Neck, New Jersey 07722

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:45Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22-R255

INSTRUCTIONS This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost Comments and the return of this form will be appreciated Fold on lines on reverse side staple in corner and send to preparing activity Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements

SPECIFICATION
MIL-STD-1320-154 (NAVY)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes" in what way?)*

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

S/N-0102-014-1801 C-25254

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:45Z
Check the source to verify that this is the current version before use.