MILITARY STANDARD

MIL-STD-1320-25 (NAVY)

10 MARCH 1987


SUPERSEDING
WR-51/25
31 MAY 1966

TRUCKLOADING
GUIDED WEAPON MK 1 MOD 0 (WALLEYE)
IN CONTAINER MK 426 MOD 0

CONTAINER DATA:

WEIGHT EMPTY..... 550 LBS
WEIGHT LOADED..... 1650 LBS△
DIMENSIONS.....154-1/8 L X 29-3/4 W X 32-1/4 H
CUBE..... 85.5 CU FT
BUWEPS..... DL 64A33F1

△ DO NOT USE FOR SHIPPING WEIGHT

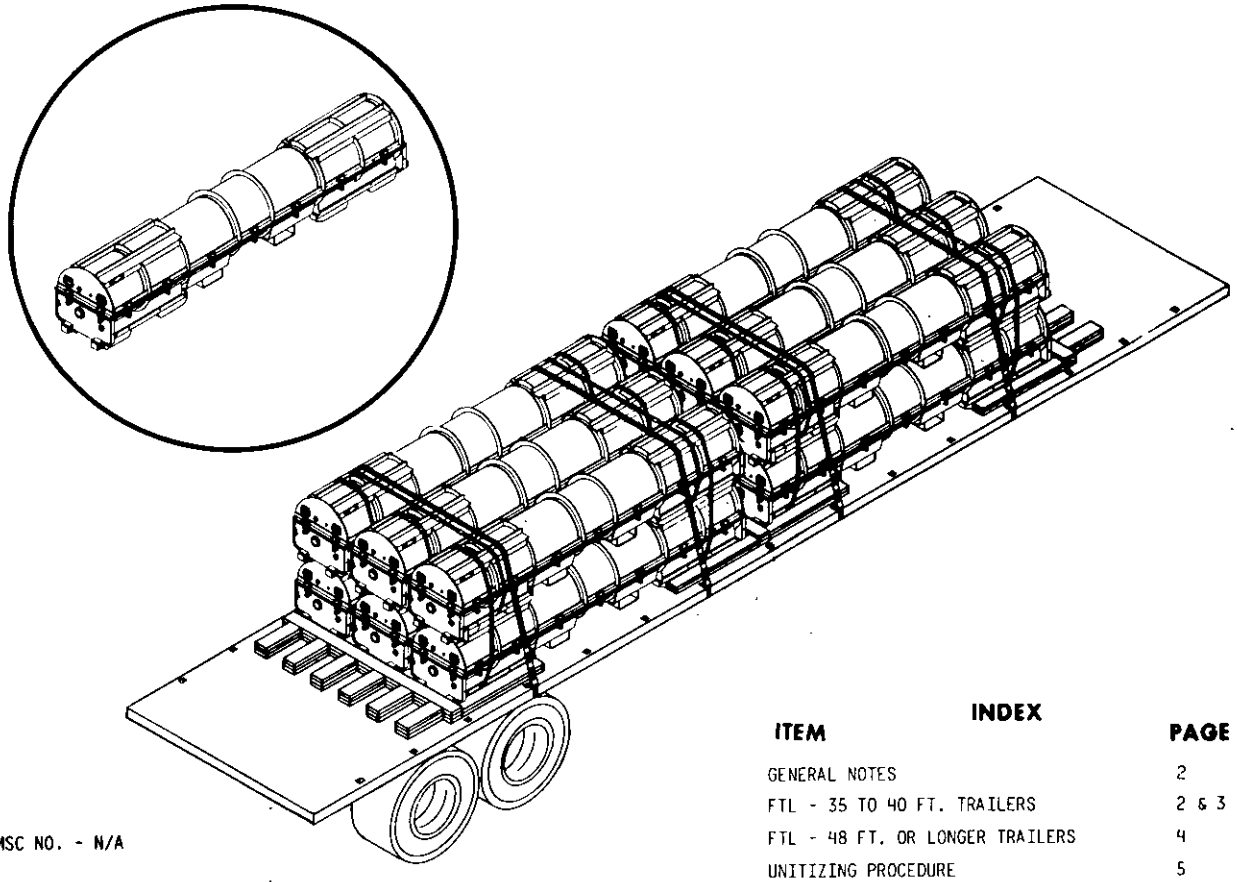

AMSC NO. - N/A

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL - 35 TO 40 FT. TRAILERS	2 & 3
FTL - 48 FT. OR LONGER TRAILERS	4
UNITIZING PROCEDURE	5
LOAD STRAPPING	6

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING CONTAINER LOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX.

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION IS UNLIMITED

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENT ONLY

M.S. Gray NWHC 3/10/87
(SIGNATURE) TECHNICAL DIRECTION AGENT (TDA) DATE

J.E. Kelly WPNSTA EARLE 3/10/87
(SIGNATURE) BY DIRECTION DATE

ORIGINATOR Charles McBride 3/10/87
DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:43Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

THE PURPOSE OF THIS DOCUMENT IS TO PROVIDE DETAILED TRUCKLOADING INSTRUCTIONS APPLICABLE TO THE GUIDED WEAPON MK 1 MOD 0 (WALLEYE) IN SHIPPING AND STORAGE CONTAINER MK 426 MOD 0. METHODS OF LOADING AND SECURING THE LOAD ARE DESCRIBED IN DETAIL. PROCEDURES AND PRACTICES HEREIN ARE INTENDED FOR COMMERCIAL FLATBED TRAILERS. THE LOCATION OF THE COMPLETE LOAD SHALL BE SUCH AS TO MEET AXLE LOAD LIMITATIONS.

DIMENSIONS INDICATED ARE IN INCHES UNLESS OTHERWISE SPECIFIED. FOR GENERAL TRUCKLOADING PROCEDURES AND REGULATIONS, REFER TO THE GENERAL WEAPONS REQUIREMENT, WR-51.


FTL - 35 TO 40 FT. TRAILERS

A. LOCATION OF STACKS OF CONTAINERS SHALL BE SUCH AS TO DISTRIBUTE THE WEIGHT OVER THE AXLES. TWO HIGH CONTAINERS SHALL BE UNITIZED AS SHOWN ON PAGE 5.

1. PLACE THE FIRST STACK CONSISTING OF SIX (6) CONTAINERS ON THE AFT END OF THE TRAILER AND POSITIONED SO THAT THE COMPLETED TRUCKLOAD WILL MEET AXLE LOAD LIMITATIONS.
2. PLACE CROSS BLOCKING MEMBERS, TRIPLED (PIECE 1) AT BOTH ENDS OF THE STACK, POSITIONED TIGHTLY AGAINST THE ENDS OF THE CONTAINER SKIDS. NAIL THE FIRST PIECE TO THE DECK WITH ONE 20d NAIL EVERY 8 INCHES. NAIL THE SECOND PIECE TO THE FIRST PIECE WITH 20d NAILS EVERY 8 INCHES. NAIL THIRD PIECE TO SECOND PIECE WITH 20d NAILS EVERY 8 INCHES.
3. POSITION SIDE BLOCKING, DOUBLED (PIECE 2), TIGHTLY AGAINST SIDES OF SKIDS OF BOTTOM CONTAINERS. NAIL TO DECK WITH SEVEN 20d NAILS. NAIL SECOND PIECE TO FIRST PIECE IN LIKE MANNER.
4. NAIL END BLOCKING MEMBERS, TRIPLED (PIECE 3) TO DECK USING FOUR 20d NAILS. NAIL SECOND PIECE TO FIRST PIECE IN LIKE MANNER. NAIL THIRD PIECE TO SECOND PIECE USING FOUR 20d NAILS. ALIGN THESE MEMBERS WITH THE CONTAINER SKIDS AS SHOWN IN THE TRUCKLOADING PLAN.
5. STRAP THE TOP LAYER OF CONTAINERS TOGETHER WITH TWO BANDS OF STEEL STRAPPING (PIECE 4), POSITIONED AS SHOWN, AND SEAL WITH A DOUBLE-NOTCHED SEAL (PIECE 5) PER BAND.
6. STRAP THE STACK TO THE TRAILER WITH TWO BANDS OF STEEL STRAPPING (PIECE 6), POSITIONED AS SHOWN. FOR METHODS OF STRAPPING SEE PAGE 5. SEAL WITH DOUBLE-CRIMPED SEALS (PIECE 7). "CHAIN MAY BE SUBSTITUTED FOR STRAPPING ON A ONE-TO-ONE BASIS TO TIE DOWN THE CONTAINERS PROVIDED THAT 2 X 6 PROTECTOR BOARDS ARE PLACED ON TOP OF THE LOAD BENEATH THE CHAINS. IN ADDITION, 2 X 4 X 5-1/2 L BLOCKS ARE NAILED TO THE UNDERSIDE OF THE 2 X 6'S. THESE BLOCKS SHOULD REST ON THE TWO OUTERMOST SKID SUPPORTS."
7. POSITION SECOND STACK OF CONTAINERS ON FORWARD END OF TRAILER SO THAT LOAD LIMITATIONS ARE MET.
8. DUNNAGE AND STRAP AS DESCRIBED IN STEPS 2, 3, 4, 5, AND 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:43Z
Check the source to verify that this is the current version before use.

FTL - 35 TO 40 FT. TRAILERS

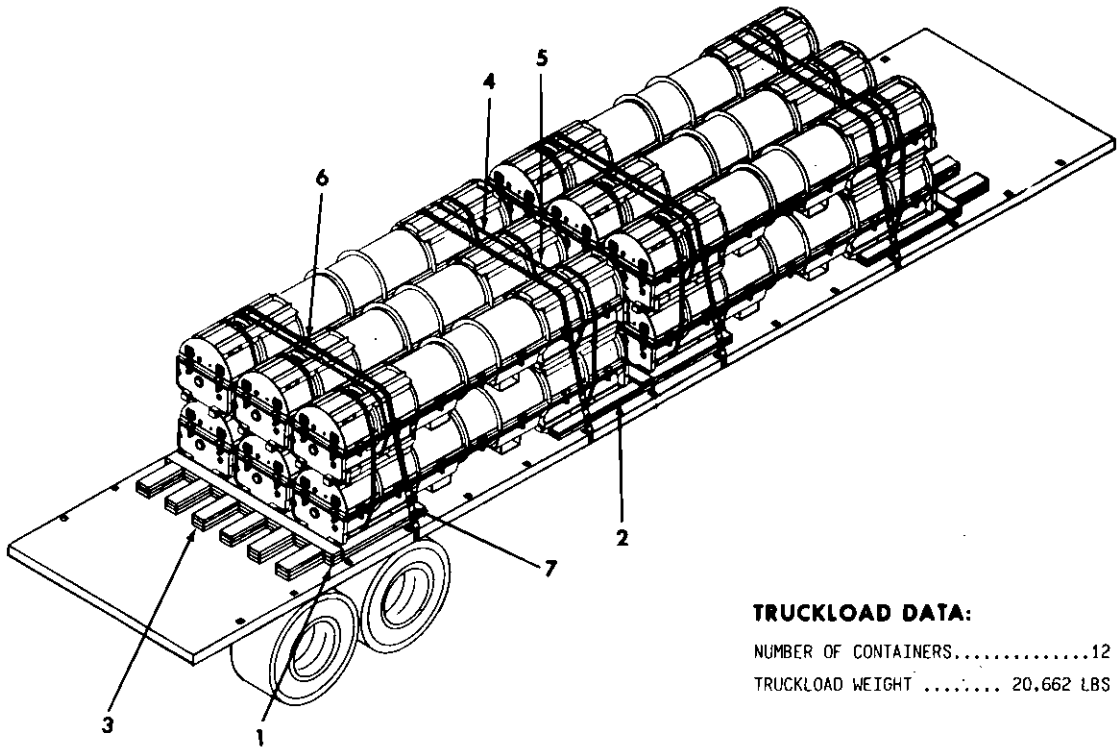

TRUCKLOAD DATA:

NUMBER OF CONTAINERS.....12

TRUCKLOAD WEIGHT ..... 20,662 LBS

NOTES:

1. UNLESS OTHERWISE SPECIFIED, ALL MATERIALS SHALL BE IN ACCORDANCE WITH MIL-STD-1320.
2. DO NOT USE TYPE 1 STRAPPING WITH POWER MACHINES.

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
AS REQ'D	7	SEAL	SEE NOTE 1	2
4	6	TIEDOWN STRAPPING	SEE NOTE 1	2 X .050 X AS REQ'D
4	5	SEAL	SEE NOTE 1	1-1/4
4	4	CROSS STRAPPING	SEE NOTES 1 & 2	1-1/4 X .035 X 22 FT
36	3	BACKUP CLEATS	SEE NOTE 1	2 X 6 X 30
16	2	SLEEPER	SEE NOTE 1	2 X 6 X 24
9	1	CROSS MEMBER	SEE NOTE 1	2 X 6 X 90

LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:43Z
Check the source to verify that this is the current version before use.


FTL - 48 FT. OR LONGER TRAILERS

SEE PAGE 2 FOR LOADING INSTRUCTIONS.

TRUCKLOAD DATA:

NUMBER OF CONTAINERS 18

TRUCKLOAD WEIGHT ..... 31,000 LBS

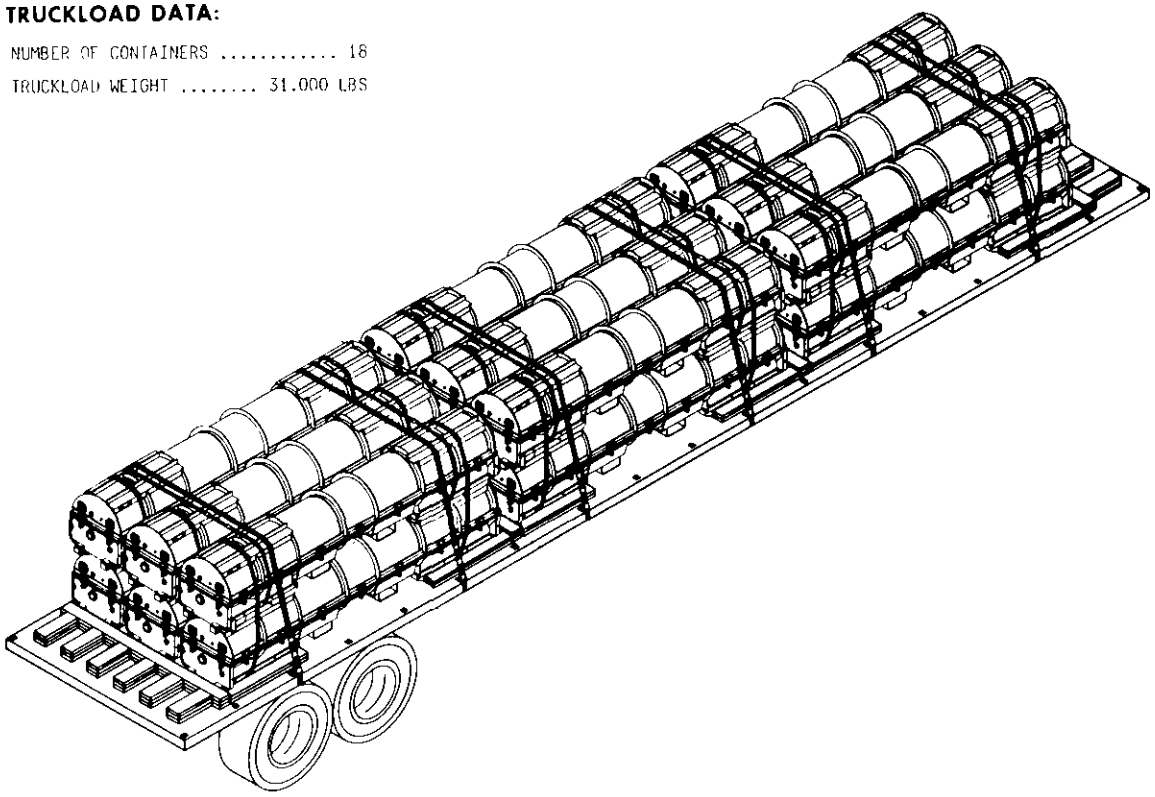

NOTES:


1. UNLESS OTHERWISE SPECIFIED, ALL MATERIAL SHALL BE IN ACCORDANCE WITH MIL-STD-1320.
2. DO NOT USE TYPE I STRAPPING WITH POWER MACHINES.

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
AS REQ'D	7	SEAL	SEE NOTE 1	2
6	6	TIEDOWN STRAPPING	SEE NOTE 1	2 X .050 X AS REQ'D
6	5	SEAL	SEE NOTE 1	1-1/4
6	4	CROSS STRAPPING	SEE NOTES 1 & 2	1-1/4 X .035 X 22 FT
36	3	BACKUP CLEATS	SEE NOTE 1	2 X 6 X 30
24	2	SLEEPER	SEE NOTE 1	2 X 6 X 24
12	1	CROSS MEMBER	SEE NOTE 1	2 X 6 X 90

LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:43Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE

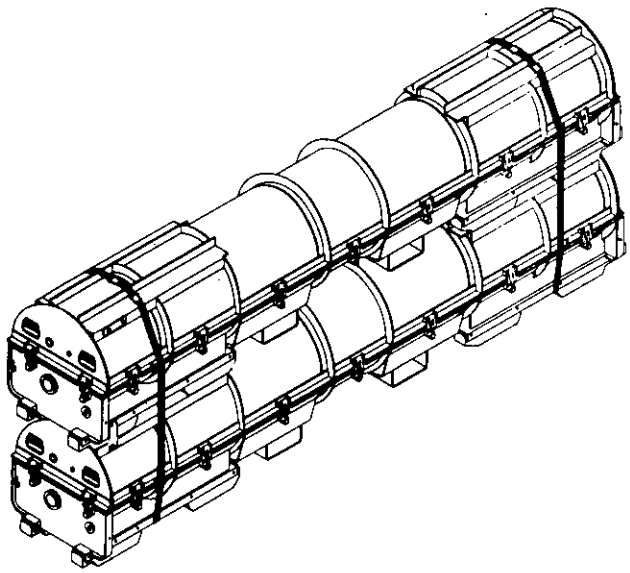

CONTAINER UNITIZING AND BANDING PROCEDURE:

1. STACK TWO CONTAINERS USING FORKLIFT TRUCK OR SUITABLE HOISTING DEVICE BEING CERTAIN THAT NESTING FEATURES AND BEARING SURFACES ARE PROPERLY POSITIONED.
2. SECURE TIE BAR FACILITIES ONE EACH SIDE OF THE CONTAINER.
3. SECURE BOTTOM CONTAINER TO TOP CONTAINER WITH TWO 1-1/4" X .035" STEEL STRAPS EACH TENSIONED AND SEALED WITH ONE 1-1/4" DOUBLE-NOTCHED STEEL SEAL.

WARNING

WHEN LOADING/UNLOAIONG TRAILERS WITH UNITIZED CONTAINERS. EXTRA CAUTION SHOULD BE TAKEN TO PREVENT TOPPLING. SPECIAL ATTENTION SHOULD BE GIVEN TO APPROPRIATE BACKUP OF OUTBOARD CONTAINERS. CONTAINERS SHALL BE DEUNITIZED AFTER UNLOADING THE VEHICLE.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:43Z
Check the source to verify that this is the current version before use.

LOAD STRAPPING

IN ADDITION TO STRUCTURAL FRAMING WHICH PREVENTS SHIFTING OF THE LOAD, FLAT STEEL STRAPS ARE PROVIDED TO SECURE THE LOAD TO THE TRAILER. ORDINARILY EACH LOAD IS STRAPPED TOGETHER AS A UNIT AFTER BEING PLACED UPON THE TRAILER. SUCH STRAPPING IS INDEPENDENT OF TIEDOWN STRAPPING PROVIDED FOR SECURING THE LOAD TO THE TRAILER. STRAPS SHALL BE IN ACCORDANCE WITH FEDERAL SPECIFICATION QQ-S-781. STRAPPING SEALS SHALL HAVE A MINIMUM TENSILE STRENGTH EQUAL TO 75 PERCENT OF THE STRAP STRENGTH. THE FOLLOWING METHODS ARE PROVIDED FOR SECURING OF THE LOAD, AS WELL AS THE STRUCTURAL FRAMING, TO THE TRAILER:

1. CONTINUOUS STRAPPING AROUND THE FLATBED AND THE LOAD (TYPE I).
2. NAILING OF STRAPS TO THE STRUCTURAL FRAME POSTS AT STAKE-POCKET LOCATIONS TO ALLOW THE STRAP TO EXTEND THROUGH THE STAKE POCKET AND WRAP UPWARD AROUND THE OUTSIDE EDGE OF THE FLATBED. THIS METHOD ALLOWS NAILING OF STRUCTURAL REINFORCING BLOCKS ON THE OUTSIDE OF THE STRAPS, PREVENTING THE STRAP NAILS FROM BEING PULLED OUT, AND DOES NOT NECESSITATE THE USE OF STRAP SEALS AT THESE LOCATIONS (TYPE II).
3. STRAPPING USED AT STAKE-POCKET LOCATIONS WHERE THERE IS NO STRUCTURAL FRAME POST IS THE SAME MANNER AS DESCRIBED IN THE SECOND METHOD BUT THE STRAP END MUST BE ATTACHED BACK TO THE STRAP BY USE OF STRAP BY USE OF STRAP SEALS (TYPE III).

IN ALL OF THE ABOVE METHODS, THE UNATTACHED STRAP ENDS ARE PULLED TOGETHER FROM BOTH SIDES OF THE FLATBED TO WRAP AROUND THE LOAD AND ARE TENSIONED AND FASTENED TO EACH OTHER BY USE OF STRAP SEALS.

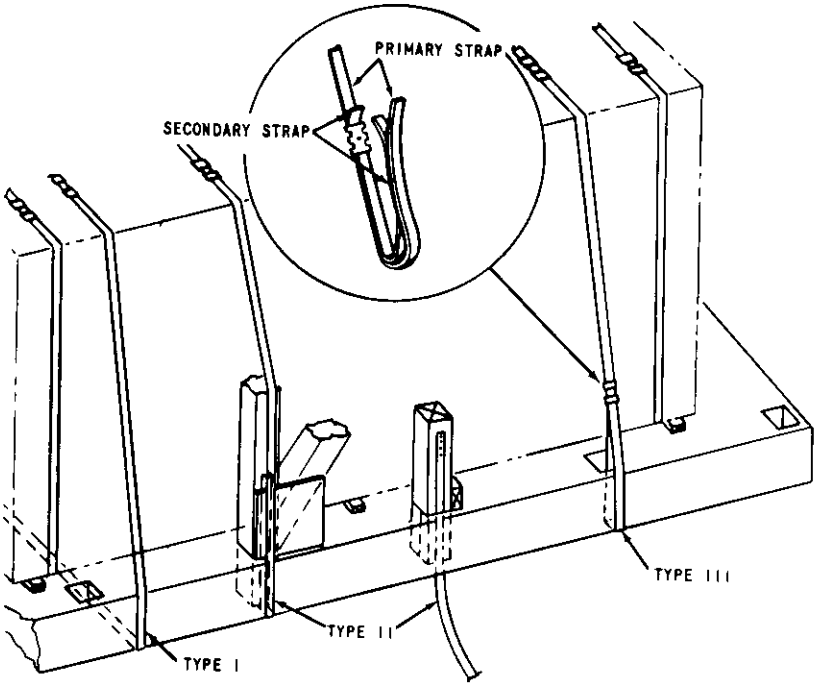

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:43Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Naval Weapons Station Earle
Naval Weapons Handling Center (803)
Colts Neck, NJ 07722

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:43Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-STD-1320-25 (NAVY)	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:43Z
Check the source to verify that this is the current version before use.