MILITARY STANDARD


MIL-STD-1320 5
(NAVY)

TRUCKLOADING

GENERAL PURPOSE MK 81 8 MOD (250 LB)
(WITH PLASTIC NOSE PLUGS)
IN PALLET BOMB MK 8 MOD 0
FLEET ISSUE UNIT LOAD

UNIT LOAD DATA

LENGTH	44 1/2
WIDTH	36 3/8
HEIGHT	22 1/16
CUBE	30.0 CU FT
WEIGHT (APPROX)	2978 LBS
UNIT LOAD DWG	MK-54 115
DOT HAZARD CLASSIFICATION	EXPLOSIVES A

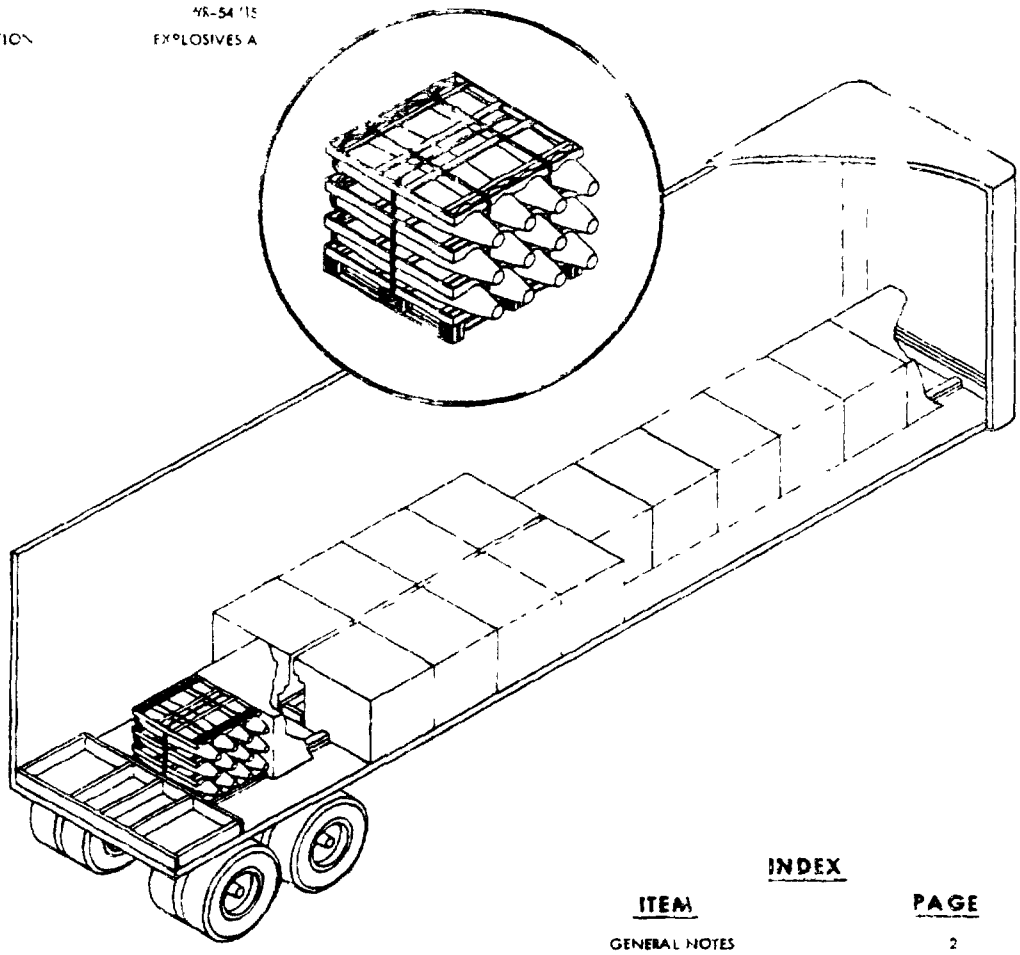

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL & LTL	2 4 5
LOAD PATTERNS	3

NOTES
1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2. FOR CROSS-REFERENCE TO ASSOCIATED PALLETIZING CONTAINERLOADING AND CARLOADING MILITARY STANDARDS REFER TO INDEX TO STANDARDS MIL-HDBK-236 (NAVY)

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENTS ONLY

TECHNICAL DIRECTION AGENT (TDA) — DATE 8/5/76

AIRSYSCOM BY DIRECTION — DATE 8/6/76

ORIGINATOR — DATE 8/30/76

NAVAL WEAPONS HANDLING CENTER
NAVAL AMMUNITION DEPOT
EARLE, NEW JERSEY

PAGE 1 OF 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:42Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1 THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING FLEET ISSUE UNIT LOADS OF 250 LB MK 21 GENERAL PURPOSE CARGO THE UNIT LOADS SHALL BE IN ACCORDANCE WITH WR-54715

2 THE PROCEDURES AND PRACTICES HEREIN ARE INTENDED FOR 40 42 44 AND 45 FT VAN TYPE TRAILERS WITH BOTH NAILABLE AND NON-NAILABLE FLOORS THE TRAILERS SHALL HAVE THEIR TANDEM AXLES LOCATED IN THE "WESTERN" POSITION AT THE EXTREME REAR OF THE TRAILER

3 DO NOT USE TRAILERS WITH ROLLUP DOORS WHEN THE REAR BLOCKING ASSEMBLY DETAIL A IS USED TO BLOCK THE REAR OF THE LOAD TRAILERS WITH ROLLUP DOORS MAY BE USED WHEN BLOCKING THE REAR OF THE LOAD USING THE METHOD SHOWN ON PAGE 5

4 THE REAR BLOCKING ASSEMBLY DETAIL A SHALL FILL THE VOID BETWEEN THE REAR OF THE LADING AND THE TRAILER DOORS WHEN THE DOORS ARE CLOSED

5 THE SPACER ASSEMBLY, DETAIL D SHALL BE USED TO FILL THE VOID BETWEEN THE UNIT LOADS WHEN THE LOADS ARE IN THE DOUBLE ROW PATTERN SEE SECTION C-C

6 WHEN THE TRAILER HAS NON-NAILABLE FLOORS SUBSTITUTE THE SPACER ASSEMBLY DETAIL D FOR THE SLEEPERS THE ASSEMBLY SHALL FILL THE VOID BETWEEN THE UNIT LOAD PALLET AND THE TRAILER SIDE WALLS

7 THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS

8 AFTER BLOCKING AND BRACING HAS BEEN INSPECTED ATTACH SHIPPING DOCUMENTS TO INSIDE OF TRAILER IN AN ACCESSIBLE AREA CLOSE AND SEAL TRAILER DOORS AND ATTACH "EXPLOSIVE A" PLACARD TO BOTH SIDES FRONT AND BACK OF TRAILER

9 APPLICABLE MATERIAL SPECIFICATIONS DUNNAGE LUMBER MM-L-751 NAILS, FF-N-105, TYPE II STYLE 10 COMMON BRIGHT STRAPPING QQ-S-781 TYPE I CLASS A

10 FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY)

FTL & LTL 40,42,44 & 45 FT TRAILERS (VAN)

WARNING

THIS STANDARD PROVIDES FOR INCREASED LOADS WHICH PRODUCE HEAVIER GROSS TANDEM AXLE WEIGHTS AND GROSS VEHICLE WEIGHTS THESE INCREASED WEIGHTS ARE NOT AUTHORIZED IN ALL 50 STATES BEFORE LOADING MORE THAN 14 UNIT LOADS IN A TRAILER, DETERMINE THAT THE LIMITATIONS OF THE NOTES IN TABLES II, III IV & V ARE MET

1 TABLES II, III IV & V PROVIDE THE CORRECT LOAD PATTERN FOR THE LENGTH AND WEIGHT OF THE TRAILER BEING LOADED THE PERMISSABLE GROSS AXLE AND GROSS VEHICLE WEIGHTS AND THE NUMBER OF UNIT LOADS BEING LOADED

NOTE

LIGHTWEIGHT TRACTOR-TRAILERS THE APPROXIMATE TARE WEIGHT OF THE TRAILER TANDEM AXLES IS 7200 LBS AND OF THE DRIVE TANDEM AXLES 10,500 LBS

STANDARD WEIGHT TRACTOR-TRAILER THE APPROXIMATE TARE WEIGHT OF THE TRAILER TANDEM AXLES IS 7800 LBS AND OF THE DRIVE TANDEM AXLES 11,500 LBS

THE ABOVE WEIGHTS MAY BE ADJUSTED UPWARDS WHEN EXPERIENCE INDICATES THAT WEIGHT RESTRICTIONS CAN BE MET

2 TO DETERMINE THE CORRECT LOAD PATTERN TO USE, SELECT THE CORRECT TABLE FOR THE LENGTH OF TRAILER BEING LOADED OPPOSITE THE NUMBER OF UNIT LOADS TO BE LOADED FIND THE CORRECT LOAD PATTERN MAKE CERTAIN THAT THE QUANTITY BEING SHIPPED IS COMPATIBLE WITH THE WEIGHT OF THE TRACTOR-TRAILER BEING LOADED AND THE WEIGHT LAWS OF THE STATES THROUGH WHICH THE SHIPMENT IS ROUTED


3 BLOCK AND BRACE THE SELECTED LOAD PATTERN USING THE PRINCIPLES OF THE TRUCKLOADS SHOWN ON PAGES 4 AND 5

4 THE TRUCKLOADS SHOWN ON PAGES 4 AND 5 ARE PRESENTED TO SHOW THE BASIC PRINCIPLES OF LOADING THEY DO NOT LIMIT LOADS TO THESE QUANTITIES

5 WHEN SHIPPING LESS THAN THE AMOUNTS SHOWN IN THE LOAD PATTERN TABLES FOLLOW THE PRINCIPLES OF THE LOAD SHOWN ON PAGE 5 DO NOT USE TRAILERS WITH NON-NAILABLE FLOORS

TABLE I

TRUCKLOAD DATA	
NO OF UNIT LOADS	WEIGHT LBS (APPROX)
16	47,648
15	44 670
14	41,692
13	38,714
12	35,736

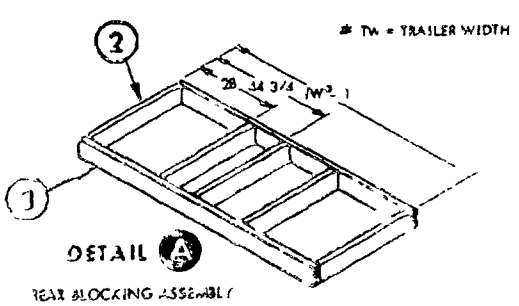

* Tw = TRAILER WIDTH


REAR BLOCKING ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:42Z
Check the source to verify that this is the current version before use.

TABLE II

40 FT TRAILER

LOAD PATTERN FWD

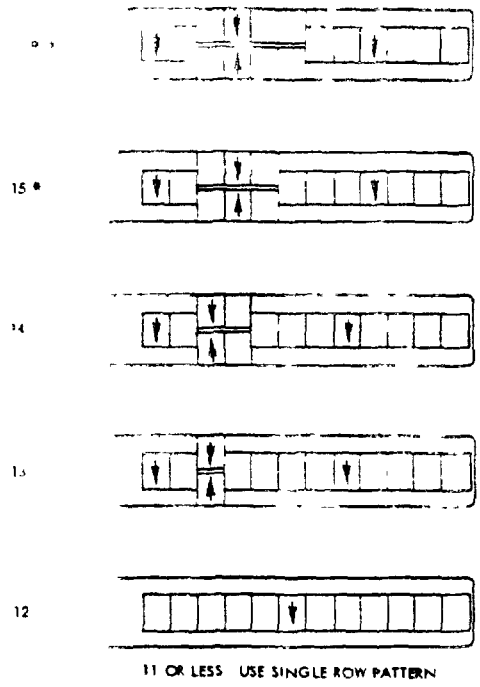


11 OR LESS USE SINGLE ROW PATTERN

TABLE III

42 FT TRAILER

LOAD PATTERN FWD

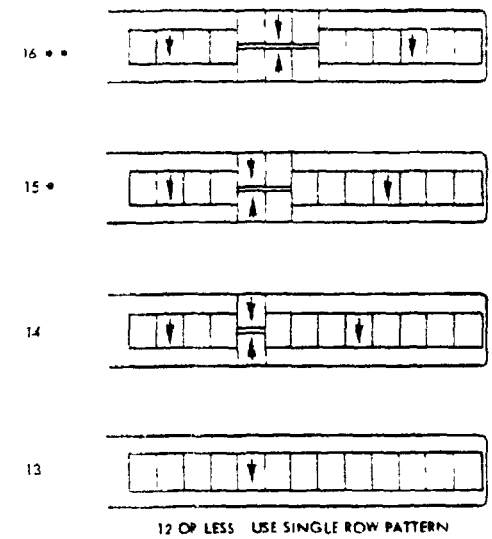


12 OR LESS USE SINGLE ROW PATTERN

TABLE IV

44 FT TRAILER

NO OF UNIT LOADS

LOAD PATTERN FWD

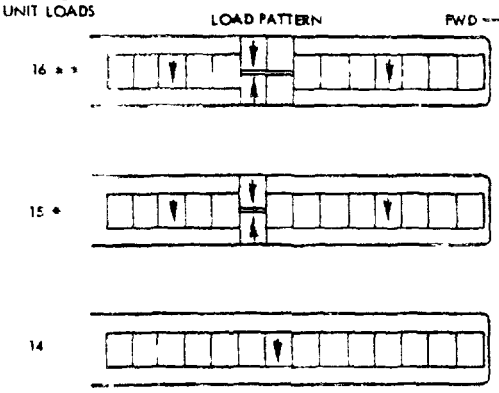


13 OR LESS USE SINGLE ROW PATTERN

TABLE V

45 FT TRAILER

NO OF UNIT LOADS

LOAD PATTERN FWD

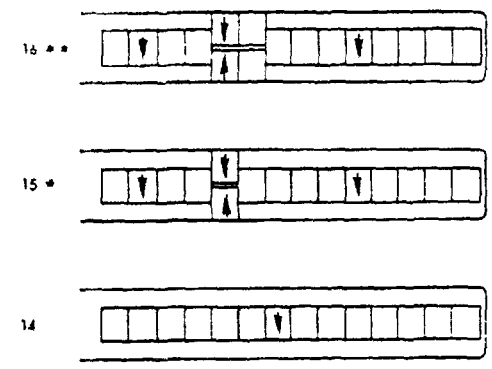

13 OR LESS USE SINGLE ROW PATTERN


* * AUTHORIZED WHEN ROUTING IS THROUGH STATES PERMITTING 34,000 LBS OR MORE ON THE TANDEM AXLES AND A GROSS VEHICLE WEIGHT OF 80,000 LBS BOTH STANDARD AND LIGHT-WEIGHT TRACTOR-TRAILERS MAY BE USED

* AUTHORIZED FOR LIGHTWEIGHT TRACTOR-TRAILERS ONLY WHEN ROUTING IS THROUGH STATES LIMITING TANDEM AXLES TO 32,000 LBS AND GROSS VEHICLE WEIGHTS OF 73,280 LBS AUTHORIZED FOR BOTH STANDARD AND LIGHTWEIGHT TRACTOR-TRAILERS WHEN ROUTING IS THROUGH STATES PERMITTING 34 000 LBS ON TANDEM AXLES AND GROSS VEHICLE WEIGHTS OF 80 000 LBS

NOTE WHEN SHIPPING 14 OR LESS UNIT LOADS BOTH STANDARD AND LIGHTWEIGHT TRACTOR-TRAILERS MAY BE USED IN ALL 50 STATES WITHOUT EXCEEDING THE WEIGHT LAWS

NOTE DIRECTION OF ARROWS INDICATES THE NOSE END OF THE BOMBS


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:42Z
Check the source to verify that this is the current version before use.

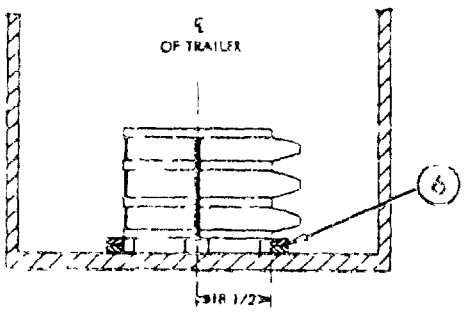

SECTION B-B

NOTE


TRUCKLOAD SHOWN IS FOR TRAILERS WITH NAILABLE FLOORS. FOR TRAILERS WITH NON-NAILABLE FLOOR SEE GENERAL NOTE 6

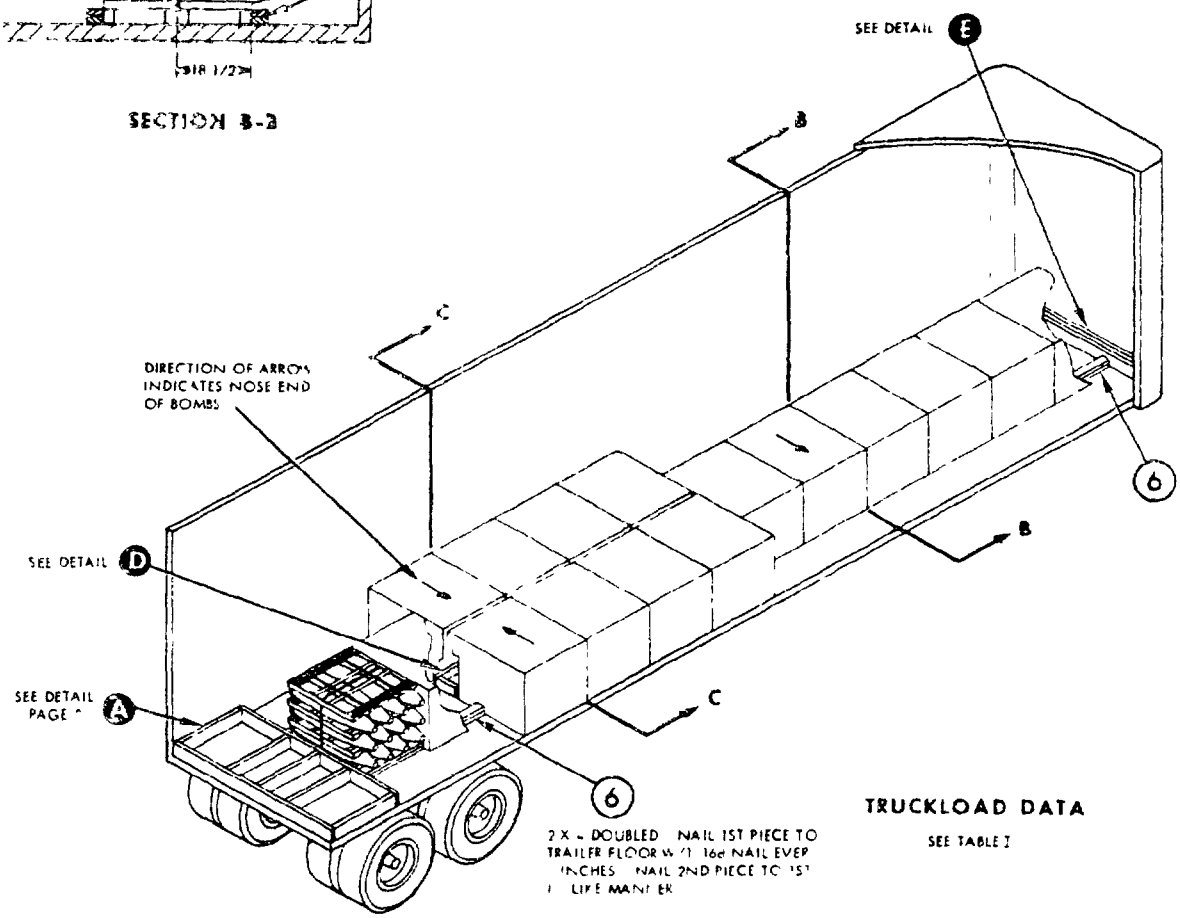

2 X * DOUBLED. NAIL 1ST PIECE TO TRAILER FLOOR W/ 1 16d NAIL EVERY INCHES. NAIL 2ND PIECE TO 1ST WITH LIKE MANNER

TRUCKLOAD DATA

SEE TABLE I

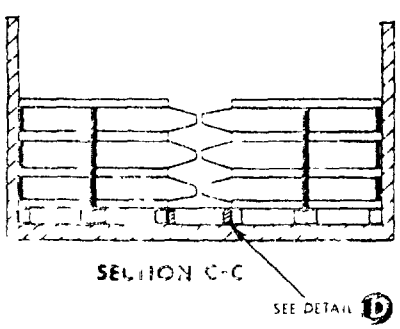


SECTION C-C

*TW=TRAILER WIDTH

PIECE NO	DESCRIPTION	SIZE	NO. OF PIECES REQ'D	LAY TO	NUMBER	SIZE
	LIST OF MATERIALS & NAILING DATA					
6	SLEEPER	2 X 4 X 146 FT	RANDOM LENGTH	SEE FIELD NOTE		
5	STRUT	2 X 4 TO SUIT	1*	SEE 5	-	-
4	LONGITUDINAL	2 X 4 X 3* - *B	8		2 PER JOINT	16d
3	CROSSMEMBER	2 X 6 X TW* - *	*	-	3 PER JOINT	16d
*	STRUT	2 X 6 TO SUIT	*	SEE *		
1	END BLOCKING	2 X 6 X TW* - *	*	* SEE NOTE *	6 PER PIECE	16d


40 FT TRAILER WITH 16 UNIT LOADS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:42Z
Check the source to verify that this is the current version before use.

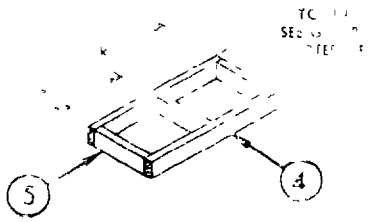


DETAIL D

SPACER ASSEMBL

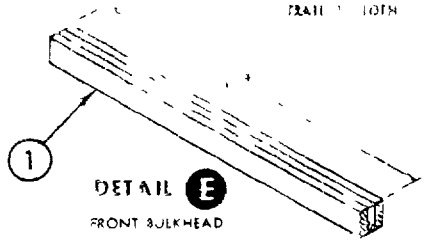

DETAIL E

FRONT BULKHEAD

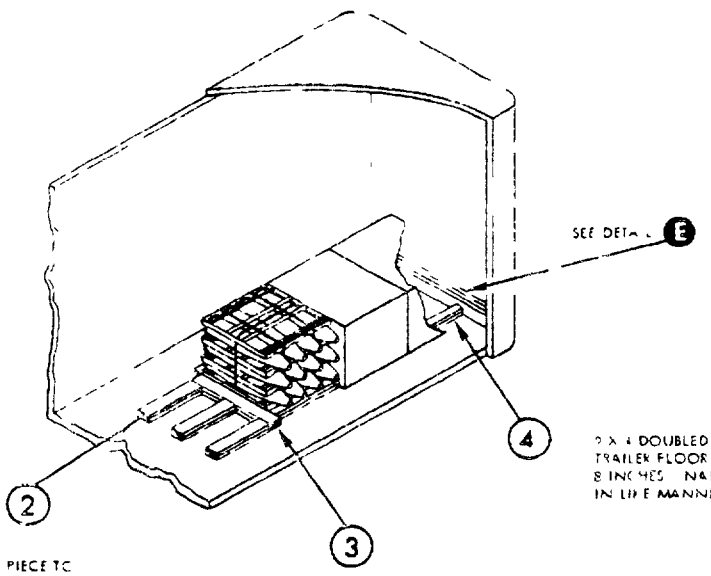

2 X 6 DOUBLED NAIL 1ST PIECE TO TRAILER FLOOR W 6-16d NAILS NAIL 2ND PIECE TO 1ST IN LIKE MANNER

2 X 6 DOUBLED NAIL 1ST PIECE TO TRAILER FLOOR W 6-16d NAILS NAIL 2ND PIECE TO 1ST IN LIKE MANNER

2 X 4 DOUBLED NAIL 1ST PIECE TO TRAILER FLOOR W 21-16d NAIL EVERY 8 INCHES NAIL 2ND PIECE TO 1ST IN LIKE MANNER

* TW = TRAILER WIDTH

PIECE NO	DESCRIPTION	SIZE	NO OF PIECES REQ D	NAIL TO	NUMBER	SIZE
4	SLEEPER	2 X 4 X 3" FT	RANDM LENGTH	SEE FIELD NOTE		
3	CROSSMEMBER	2 X 6 X 3"	2	SEE FIELD NOTE		
2	BACKUP CLEAT	2 X 6 X 3"	6	SEE FIELD NOTE		
1	FWD BLOCKING	2 X 6 X TW* - 1	3	LAMINATE	6 PER PIECE	10d
LIST OF MATERIALS & NAILING DATA						

LTL-SINGLE ROW PATTERN OF 3 UNIT LOADS

REVISED
7-1-65

MIL-STD-[illegible]
NAVY

C 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers and vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-STD-1320-5 (NAVY)

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?
☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1426 REPLACES EDITION OF JAN 73 WHICH MAY BE USED

5/N 0102-LF-001-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:42Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DOD 316

Code 803

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commanding Officer
Naval Weapons Station Earle (NWHC Code 803 R. Harris)
Colts Neck, New Jersey 07722

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:42Z
Check the source to verify that this is the current version before use.