
MILITARY SPECIFICATION SHEET


SWITCH (COAXIAL), RADIO FREQUENCY
TRANSMISSION LINE, (ELECTRICALLY OPERATED)
CLASS B, 1P2T

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the switch described herein shall consist of this document and the latest issue of Specification MIL-S-3928.

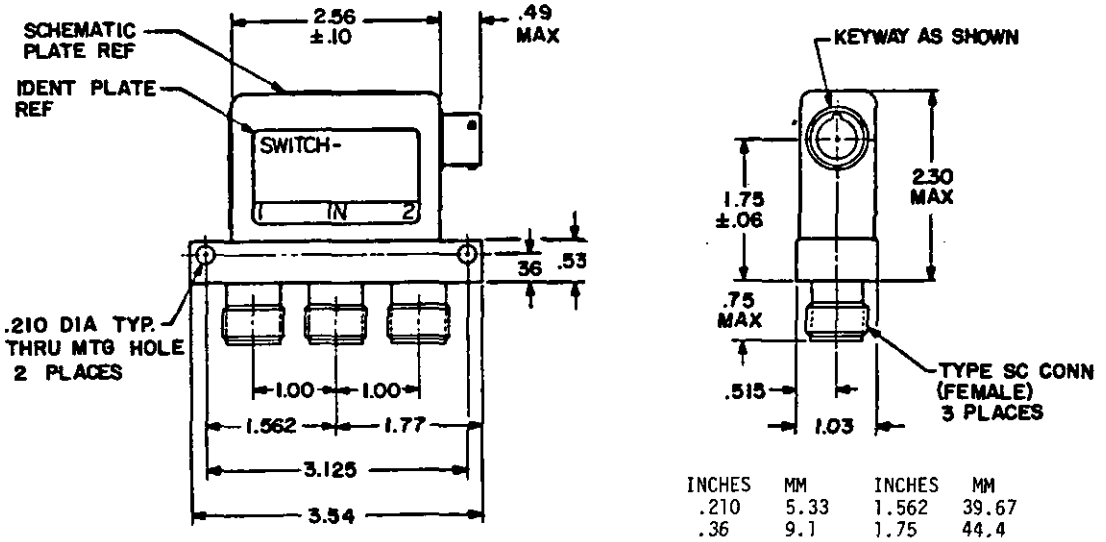

INCHES	MM	INCHES	MM
.210	5.33	1.562	39.67
.36	9.1	1.75	44.4
.49	12.4	1.77	45.0
.515	13.08	2.30	58.4
.53	13.5	2.56	65.0
.75	19.0	3.125	79.38
1.00	25.4	3.54	89.9
1.03	26.2		

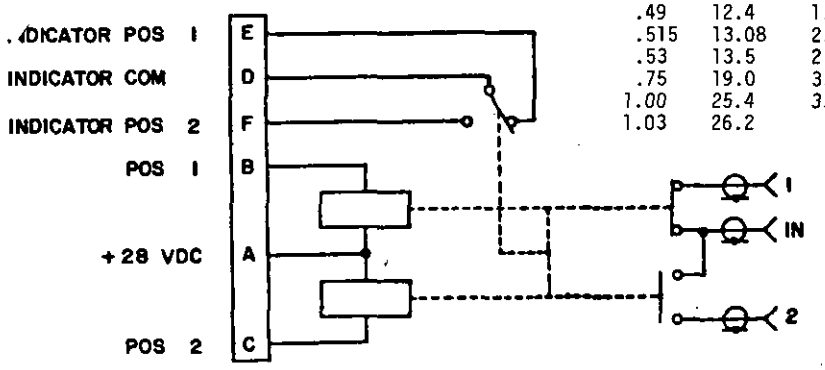

NOTE: SHOWN IN POS 1 (PIN B LAST ENERGIZED)
ENERGIZE PIN C TO CONNECT IN TO 2 (POS 2).

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.010 (.25 mm) for three place decimals and ±.03 (.8 mm) for two place decimals.

FIGURE 1. Switch configuration and schematic, P/N M3928/22-01.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.
Operation: Pulsed latching (see schematic).
Position indicating circuit: 28 Vdc.
Operating voltage: 28 Vdc, nominal.
Nominal impedance: 50 ohms.
RF connectors: Female connectors (3 each) shall mate with male connectors per MIL-C-39012/35.
Operating temperature: -55° to +71°C.
Power and indicating connector: MS3113H-10-6P.
Frequency range: dc to 6.5 GH_z.
Housing: E.
Pickup voltage: 24 Vdc.
Weight: 8.4 ounces, maximum.

VSWR: 1.5:1, maximum.

Insertion loss: 0.4 dB, maximum.

Isolation: 60 dB, minimum.

RF power handling capability:
Average - 400 watts.
Peak - 2 kW at 1.2 GHz.

Switching time: 20 ms, maximum.

Operating current (20°C): .32 ampere at 28 Vdc.

Life (X 1,000): 100.

Vibration: Method I.

Part number: M3928/22-01.

NOTE: Switches are substitutable for the following:

Part No. M3928/23	Manufacturer's code	Commercial type
01	05869	722068-1
01	82152	800C50900

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy -
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - MU
Navy - MC, CG, AS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-0846-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:21Z
Check the source to verify that this is the current version before use.