
FED SUP CLASS
4730

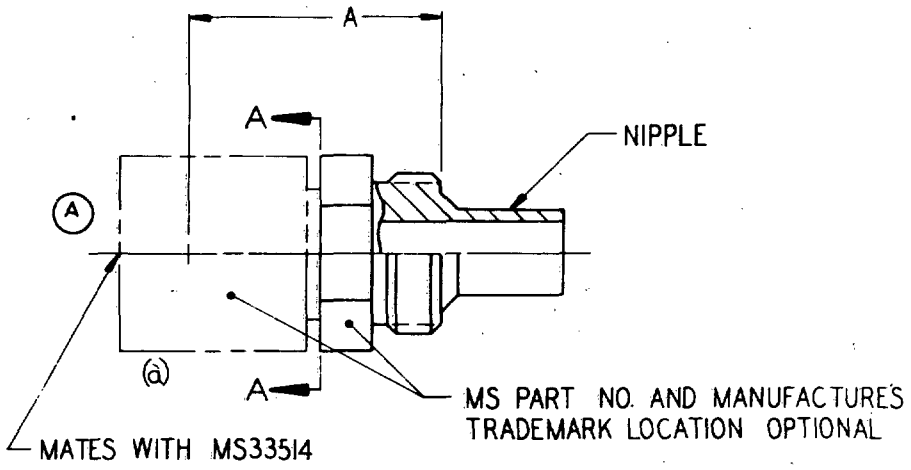

MS PART NUMBER	NIPPLE	REF
(b) (A) MS27386-3/4C	(A) MS27391-3/4C	.871
MS27386-4C	MS27391-4C	.825
MS27386-5C	MS27391-5C	.863
MS27386-6C	MS27391-6C	.948
MS27386-8C	MS27391-8C	1.087
MS27386-8	MS27391-8D	
MS27386-10C	MS27391-10C	1.230
MS27386-10	MS27391-10D	
MS27386-12C	MS27391-12C	1.288
MS27386-12	MS27391-12D	
MS27386-16C	MS27391-16C	1.434
MS27386-16	MS27391-16D	
MS27386-20C	MS27391-20C	1.556
MS27386-20	MS27391-20D	
MS27386-24C	MS27391-24C	1.881
MS27386-24	MS27391-24D	

(A) "A" IS THE DIMENSION BETWEEN THE HOSE END OF THE THREADED SECTION AND THE END OF THE INSERT.

(A) FOR CHANGES SEE SHEET 1.

PA Air Force-11 Other Cust (A) Army-AV Navy-AS	TITLE: NIPPLE SUB ASSEMBLY, FLARELESS, STRAIGHT - WITH SWIVEL NUT	MILITARY STANDARD MS27386
Procurement Specification MIL-F-27272	SUPERSEDES	SHEET 1 OF 2

DD FORM 1 SEP 67 672 Coordinated [illegible]

User Activities:
Army-WC, ME, MI

Review Activities:
Army-AV
Navy-AS
Air Force-82

This military standard is approved by the Department of Defense and is mandatory for all activities. Selection for all new engineering and design applications shall be made from this document.

APPROVED 2 May 66 REVISED (A) 30 Jun 72

NOTE: The Government has a royalty free license under the following listed patents for the benefit of Manufacturers of the item either for the Government or for use in equipment to be delivered to the Government. (U.S. Patent Nos. 2,833,567; 3,044,163; 3,055,682)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:22Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

MATERIAL : SUFFIX "C" : CORROSION RESISTING STEEL . SUFFIX "D" : ALUMINUM ALLOY. NO SUFFIX : COMBINATION OF ALUMINUM ALLOY AND CORROSION RESISTING STEEL. SEE MS STANDARDS LISTED ON SHEET 1 FOR MATERIAL SPECIFICATIONS.

THESE PARTS FOR USE WITH MIL-H-27267 HOSE.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

ANY DESIGN OF ADAPTER COMPONENTS TO THE LEFT OF PLANE A-A IS ACCEPTABLE PROVIDED : "A" DIM, THE MATERIALS SPECIFIED, THE FABRICATION NOTES OF THIS STANDARD, AND REQUIREMENTS OF THE PROCUREMENT SPECIFICATION ARE MET.

(a) IF REQUIRED, LOCKWIRE HOLES TO BE DRILLED IN ACCORDANCE WITH AS1043 AND SUFFIX "L" ADDED TO PART NUMBER. EXAMPLE: MS27386-8CL.

(b) SWIVEL NUT AND SEALING SURFACE OF NIPPLE SHALL MATE WITH MS33514-3 FITTING. THE REMAINING PORTION OF THE ASSEMBLY SHALL MATE WITH MIL-H-27267-4 HOSE

NEXT ASSEMBLY MS27381.

APPROVED 2 May 66 REVISED (A) FOR CHANGES SEE SHEET 1.

User Activities: Army-WC, ME, MI

Review Activities: Army-AV Navy-AS Air Force-82

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Air Force-11 (A) Other Cust Army-AV Navy-AS	TITLE NIPPLE SUB ASSEMBLY, FLARELESS, STRAIGHT- WITH SWIVEL NUT	MILITARY STANDARD MS27386
Procurement Specification MIL-F-27272	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 87 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

NOTE: The Government has a royalty free license under the following listed patents for the benefit of Manufacturers of the item either for the Government or for use on equipment to be delivered to the Government. (U.S. Patent Nos. 2,833,567; 3,044,163; 3,055,682)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:22Z
Check the source to verify that this is the current version before use.