FED. SUP CLASS
4730

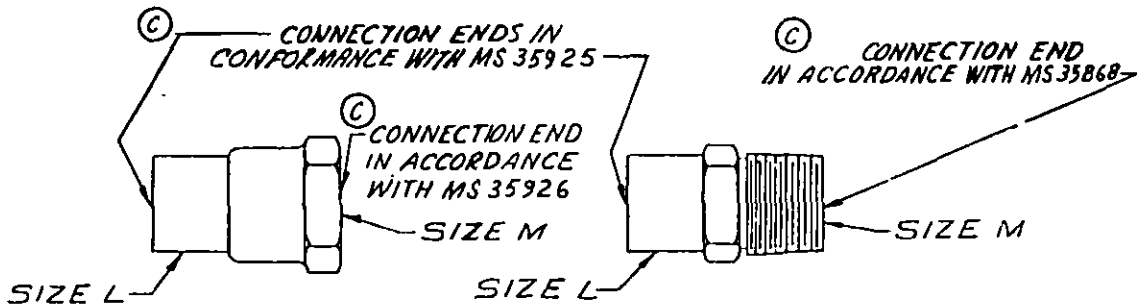

FEMALE ADAPTER
FIG 1

MALE ADAPTER
FIG 2

© DASH NUMBER FIG 1	DASH NUMBER FIG 2	SIZE L×M
-3-2F	-3-2	3/8 × 1/4
-3-3F	-3-3	3/8 × 3/8
-4-3F	-4-3	1/2 × 3/8
-4-4F	-4-4	1/2 × 1/2
-4-6F	-4-6	1/2 × 3/4
-5-2F		5/8 × 1/4
-5-3F	-5-3	5/8 × 3/8
-5-4F	-5-4	5/8 × 1/2
-5-6F	-5-6	5/8 × 3/4
-6-4F	-6-4	3/4 × 1/2
-6-6F	-6-6	3/4 × 3/4
-7-4F	-7-4	7/8 × 1/2
-7-6F	-7-6	7/8 × 3/4
-9-6F	-9-6	1 1/8 × 3/4

© 1. FITTINGS SHALL BE MADE FROM MATERIALS CONFORMING TO ASTM B 170 Grade 2 OR TO ANSI B 16.22, STRESS RELIEVED DRAWN BRASS ROD CONFORMING TO ALLOY NO. 360, TEMPER HALF HARD OR AS EXTRUDED OR FORGING COPPER ALLOY NO. 377, TEMPER AS EXTRUDED OF QQ-B-626.

2. FITTINGS SHALL BE OF ONE PIECE, SEAMLESS BRASS CONSTRUCTION. THE MAXIMUM ALLOWABLE VARIATION IN THE ALIGNMENT OF ALL OPENINGS SHALL BE 1/16 INCH IN ONE FOOT.
3. ALL DIMENSIONS GIVEN IN INCHES.
4. REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL.
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

© 6. PART NUMBER: The MS Part Number consists of the MS number plus the dash number Example: MS35921-3-2F. The first dash numeral is end connection size L. The second dash numeral is end connection size M, both in increments of 1/8 inch.

© Denotes changes

APPROVED 22 SEPT 58 REVISED (A) 2 OCT '67 (B) 19 SEPT 72 (C) 29 OCT 76

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

Army MC SH CS
Navy MC
DSA CS

P.A.	TITLE	MILITARY STANDARD
Other Cust GL 99	ADAPTER, STRAIGHT, PIPE TO TUBE, PIPE THD TO FEMALE SOLDER-JOINT, REFRIGERATION	MS 35921
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1

DD EDITIONS OF THIS FORM ARE OBSOLETE.

Proposed Revision 4730-0621

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:31Z
Check the source to verify that this is the current version before use.