MILITARY SPECIFICATION

BOTTLE SET, PHYSICIAN'S SATCHEL

This specification is approved for use by the Defense Personnel Support Center, Defense Supply Agency, 2800 S. 20th Street, Philadelphia, PA 19101 and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of bottle set, twelve 1/2-ounce and eight 1-ounce screw-capped bottles contained in a folding case. (see 6.1)

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposals form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

PPP-B-636	- Box, Shipping, Fiberboard

MILITARY

MIL-F-10884	- Fasteners, Snap
MIL-P-116	- Preservation-Packing, Methods of.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

FSC 6515

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:54Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Material

3.1.1 Bottles. Bottles shall be made of commercial grade transparent clear glass, soda-lime composition, free of defects.

3.1.2 Screwcaps. Screwcaps shall be made of a hard durable plastic, resistant to impact. Caps shall be lined with cork, pulp or other resilient composition. The liner shall be faced with a vinyl or vinylidene type coating impervious to moisture. Color of the cap shall be black.

3.1.2.1 Leakage. The bottles shall show no evidence of leakage when tested as specified in 4.3.1.

3.1.3 Bottle case. The bottle case shall be fabricated of chipboard covered throughout with black vinyl coated cloth (artificial leather). The surface shall have a simulated leather wrinkle finish.

3.1.3.1 Case lining and binding. The lining and binder shall be vinyl coated cloth with a minimum weight of 6.4 ounces per square yard.

3.1.3.2 Case covering and bottle loops. The case covering and bottle loops shall be vinyl coated cloth with a minimum weight of 10.4 ounces per square yard.

3.1.3.3 Chipboard. The chipboard stiffener shall be 0.065 inch thick, commercial grade.

3.1.4 Snap fasteners. The snap fasteners shall be in accordance with Style 5 of MIL-F-10884. The cap shall be 7/16 inch diameter with socket; stud shall be solid with flanged underpart. The snap fastener shall be nickel plated.

3.2 Construction. The bottle set shall consist of a bottle case, 12 one-half ounce and 8 one-ounce screw capped bottles (see Figure 1).

3.2.1 Bottle case. The bottle case shall measure 9-3/4 inches in length by 4 inches in width by 2 inches in depth, when closed. The inside lower edges of both bottle retaining areas of the case shall be provided with a valance to serve as a stop for the bottles. The inside cover of the case shall be provided with eight loops of black plastic coated cloth, and the inside back shall have twelve loops of the plastic coated cloth to retain the 1-ounce and the 1/2 ounce bottles respectively. The plastic coated cloth loops shall be 1 inch in width and the proper length to retain the bottles securely. The loops at each end of the bottle rows shall be cut to cover the portion of the bottle adjacent

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:54Z
Check the source to verify that this is the current version before use.

to the exterior of the case in order to protect the bottles when the case is closed. All edges of the case shall be bound with black vinyl sheeting and stitched. The case shall be a flat cover folding type, with a flap measuring 2 inches in width. The case shall be provided with two snap fasteners located one each side of the cover flap to secure the case (see figure 1).

3.22 Bottles. The bottles shall be cylindrical of the screwcap type, of nominal 1/2-ounce and 1-ounce capacities, conforming to the following dimensions, with commercial tolerances: 1/

TABLE I. Dimensions.

Bottle designation	Length of bottle with cap	Outside diameter of bottle	Inside diameter of mouth	Outside diameter of cap
1/2 ounce	84 mm	16 mm	11 mm	17 mm
1-ounce	95 mm	24 mm	16 mm	25 mm

1/ A maximum of ± 15 mm will be permitted i length and diameter.

3.3 Identification marking. A metal plate permanently etched or die-stamped with the manufacturer's name or registered trademark, shall be secured to the inside surface of the flap cover of the case. As an alternate, the manufacturer's name or registered trademark may be stamped in metal foil on the inside surface of the flap cover.

3.4 Workmanship. Workmanship shall be first class throughout. Bottle sets shall be free from defects which detract from their appearance or may impair their serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:54Z
Check the source to verify that this is the current version before use.

4.1.1 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of 3 years after delivery of the supplies to which such records relate.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.3 Certificates of quality. Certificates of quality, supplied by the manufacturer of the component or material, may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The certificate shall include the name of the contractor, the contract number, the NSN, the item identification, and individual test results.

4.2 Quality conformance inspection. The examinations and tests required to assure conformance of those items or lots of items to be offered for acceptance are classified as specified in tables II and III (see 4.2.1, 4.2.2 and 4.2.3).

4.2.1 Sampling for examination. Sampling for examination shall be conducted in accordance with MIL-STD-105. The inspection levels and acceptable quality levels shall be as indicated in table II. Unit of product for examination purposes shall be a bottle set.

TABLE II. Sampling plan

	Inspection level	AQL (percent defective)
For visual examination		
Major defects	I	2.5
Minor defects	I	4.0
For dimensional examination	S-2	2.5
For tests	S-1	1/

1/ Acceptance number shall be zero.

4.2.2 Examination. The set shall be examined for defects including, but not limited to, those listed in table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:54Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects

Category	Defect
Major	
101	Bottle not free of cracks or chips.
102	Bottle not free of sharp edges.
103	Any component missing
104	Bottle or screwcap incorrectly dimensioned.
105	Bottle not clear and transparent.
106	Screwcap not free of major cracks and chips.
107	Bottlecase improperly fabricated.
108	Overall bottlecase dimensions incorrect.
Minor	
201	Bottle not clean and dry.
202	Bottle not free of deformed areas.
203	Bottle not free of seeds or blisters.
204	Screwcap improperly dimensioned.
205	Materials used other than specified.
206	Screwcap liner missing or damaged.
207	Bottlecase scratched, cut or torn.
208	Snap fastener incorrectly installed.
209	Fasteners non-functionable.
210	Identification marking illegible or incomplete.

4.2.3 Sampling for tests. Sampling for tests shall be conducted in accordance with MIL-STD-105 and table II, except that the acceptance number shall be zero for all sample sizes. Unit of product for test purposes shall be a set.

4.2.4 Packaging inspection. The inspection of the unit, intermediate package, packing and marking for shipment and storage shall be in accordance with quality assurance provisions of the applicable container specification and the marking requirements of MIL-STD-129.

4.3 Tests. Tests shall be conducted to determine compliance with specifications requirements. Tests of components to subsidiary specifications shall be as described in the applicable document, including sampling.

4.3.1 Leakage. The specified bottle set sample shall be collected and a minimum of four bottles evenly divided in capacity shall be tested for leakage. Bottles shall be filled with water and the caps screwed on tightly. The bottles shall then be inverted for 10 minutes before examining for leakage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:54Z
Check the source to verify that this is the current version before use.

5. PACKAGING.

5.1 Preservation-packaging. Preservation-packaging shall be level A or C as specified (see 6.2).

5.1.1 Unit of issue. One set, containing a satchel and twenty bottles as specified, constitutes one unit of issue.

5.1.2 Level A.

5.1.2.1 Cleaning. The bottles shall be cleaned in accordance with MIL-P-116, process C-1.

5.1.2.2 Drying. Bottles shall be dried in accordance with MIL-P-116.

5.1.2.3 Preservative application. Preservatives shall not be used.

5.1.2.4 Unit packaging. The bottles shall be placed in their respective compartments in the satchel and the satchel secured. The satchel shall be wrapped in kraft paper or other suitable material and packaged in a box conforming to PPP-B-636, class domestic, style optional. Closure shall be as specified in the appendix of the box specification.

5.1.3 Level C. Bottles shall be clean, dry and placed within their respective compartments in the satchel. The satchel shall be secured and packaged in a manner that will afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity.

5.2 Packing. Packing shall be level A, B or C, as specified (see 6.2).

5.2.1 Level A. Twenty four unit packages shall be packed in an exterior container designed for a type 2 load and conforming to PPP-B-636, class weather-resistant. Closure, strapping and waterproofing shall be as specified in the appendix of the box specification.

5.2.2 Level B. Twenty four unit packages shall be packed in an exterior container designed for a type 2 load and conforming to PPP-B-636, class domestic. Closure shall be as specified in the appendix of the box specification.

5.2.3 Level C. The packaged sets shall be packed in shipping containers that will afford adequate protection against damage during direct shipment from the supply source to the first receiving activity. These packs shall conform to the applicable carrier rules and regulations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:54Z
Check the source to verify that this is the current version before use.

5.3 Marking.

5.3.1 Unit package. Each unit package shall be marked in accordance with MIL-STD-129. Contract or purchase order number and name of contractor shall be shown.

5.3.2 Exterior container. Exterior containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The bottle set is intended for use in physicians satchels to contain medication such as capsules, tablets, etc.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Applicable levels of packaging and packing. (see 5.1 and 5.2).
(c) National Stock Number.

6.3 This specification includes the following item listed in the Federal Supply Catalog:


National stock number	Item identification
6515-00-308-8235	Bottle Set, Physician's Satchel, Set of 20.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
DSA-DM

Project No. 6515-2012

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:54Z
Check the source to verify that this is the current version before use.

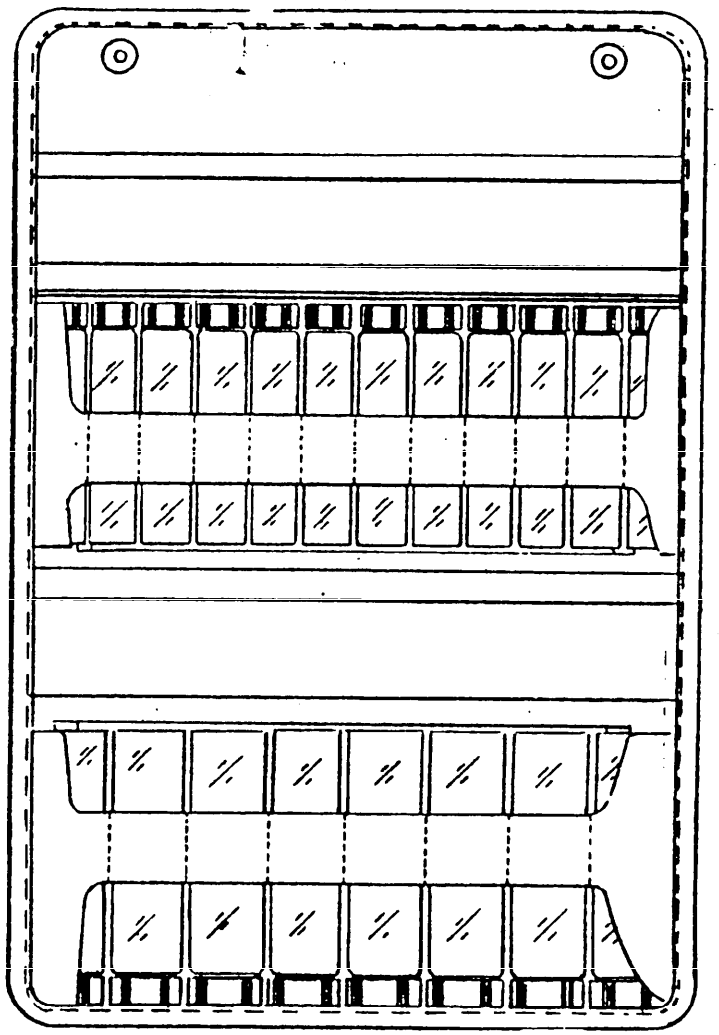

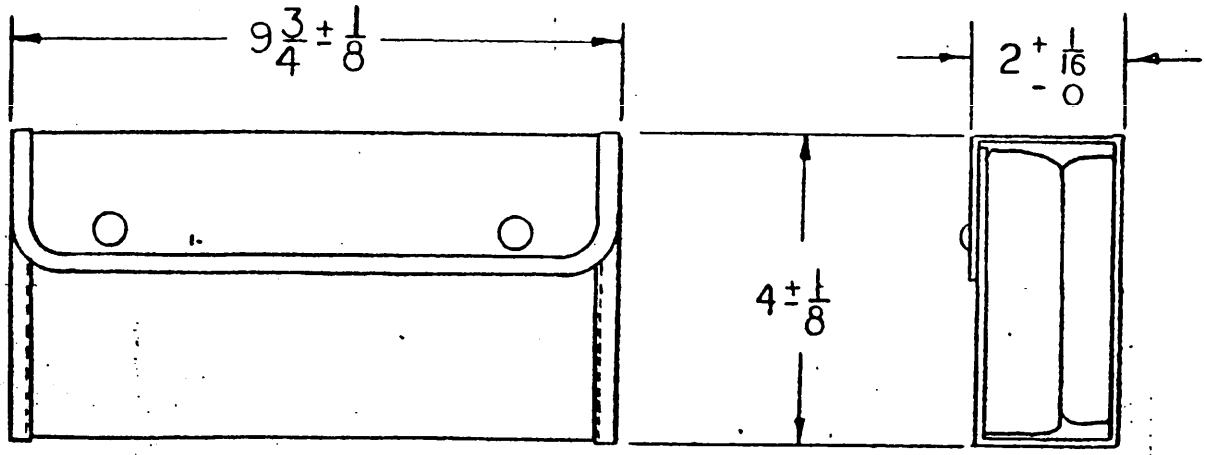


FIGURE 1. Bottle Set, Physicians Satchel

https://assist.dla.mil -- Downloaded: 20260-21T10:54Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-B-37253(DSA-DM) - BOTTLE SET, PHYSICIAN'S SATCHEL

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:54Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

To detach this form, cut along this line

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:54Z
Check the source to verify that this is the current version before use.