INCH-POUND

MIL-I-51325C
13 November 1992

SUPERSEDING
MIL-I-51325B
19 January 1984

MILITARY SPECIFICATION

INSECTICIDE, CHLORPYRIFOS, EMULSIFIABLE CONCENTRATE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one insecticide in the form of an emulsifiable concentrate containing 4 pounds per gallon of 0,0-diethyl 0-(3,5,6-trichloro-2-pyridyl) phosphorothioate.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army Chemical Research, Development and Engineering Center, ATTN: SMCCR-PET-S, Aberdeen Proving Ground, MD 21010-5423 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 6840

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

NN-P-71	-	Pallets, Material Handling, Wood, Stringer Construction, 2-Way and 4-Way (Partial)
PPP-B-585	-	Boxes, Wood, Wirebound
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-C-96	-	Cans, Metal, 28 Gauge and Lighter
PPP-F-320	-	Fiberboard: Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes
PPP-P-704	-	Pails, Metal: (Shipping, Steel, 1 Through 12 Gallons)

MILITARY

MIL-V-12276	-	Varnish, Phenolic, Baking

STANDARDS

MILITARY

MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

CODE OF FEDERAL REGULATIONS (CFR)

40 CFR 150 to 189	-	Pesticide Program
49 CFR 100 to 199	-	Department of Transportation Hazardous Materials Regulations

(The Code of Federal Regulations and Federal Register (FR) are for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402. When indicated, reprints of certain regulations may be obtained from the Federal agency responsible for issuance thereof.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:05Z
Check the source to verify that this is the current version before use.

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issue of the documents cited in the solicitation (see 6.2).

ASTM STANDARDS

D 56 - Flash Point by Tag Closed Tester
D 2111 - Specific Gravity of Halogenated Organic Solvents and Their Admixtures
E 203 - Water Using Karl Fischer Reagent

(Application for copies should be addressed to ASTM, 1916 Race Street, Philadelphia, PA 19103-1187.)

INTERNATIONAL CIVIL AVIATION ORGANIZATION

"Technical Instructions for the Safe Transport of Dangerous Goods by Air"

(Application for copies should be addressed to the International Civil Aviation Organization, 1000 Sherbrooke Street West, Suite 400, Montreal, Quebec, Canada H3A 2R2.)

INTERNATIONAL MARITIME ORGANIZATION

"International Maritime Dangerous Goods Code"

(Application for copies should be addressed to the International Maritime Organization, 101-104 Piccadilly, London, W1V OAE, England.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Chemical and physical characteristics. Chlorpyrifos emulsifiable concentrate shall conform to the chemical and physical characteristics of table I when tested as specified therein.

TABLE I. Chemical and physical characteristics

Characteristic	Requirement	Test paragraph
Flash point, minimum	80°F	4.2.4.1
Water content, percent by weight, maximum	0.1	4.2.4.2
pH of methanol solution	6.0 +/- 1.0	4.2.4.3
Emulsion stability	To pass test	4.2.4.4

3.2 Pounds of 0,0-diethyl 0-(3,5,6-trichloro-2-pyridyl) phosphorothioate per gallon. Chlorpyrifos emulsifiable concentrate shall contain no less than 4.0 pounds of 0,0-diethyl 0-(3,5,6-trichloro-2-pyridyl) phosphorothioate per gallon at 20°C when tested as specified in 4.2.4.5.

3.3 Labeling. Unit containers shall be labeled in compliance with the requirements of 40 CFR 156 and 49 CFR 100 to 199. Labels shall be approved and registered in accordance with 40 CFR 162. As a minimum, each container shall be labeled with the following information:

(a) The name and percent by weight of each active ingredient
(b) The total percent by weight of inactive ingredients
(c) National stock number, military specification number, contract number, and lot number
(d) Manufacturer's name and address
(e) EPA registration and establishment number
(f) Directions for use: As a minimum the label shall list directions for use for adult and larval mosquito control; area control of ticks and chiggers; application within food handling establishments and other buildings to control cockroaches, ants, brown dog ticks, clover mites, crickets, and spiders; application around and adjacent to buildings to help prevent infestations of ants, crickets, earwigs, millipedes, and sowbugs (pillbugs); turf and lawn insect control in include ants, armyworms, brown dog ticks, chinch bugs, crickets, clover mites, cutworms, earwigs, fleas, sod webworms, turfgrass (hyperodes) weevils, and white grubs (European chafer and Japanese beetle larvae only); ornamental plant insect control to include aphids, bagworms, cutworms, mites, whiteflies, thrips, and scale crawlers. However, additional uses shall be only those authorized by EPA.
(g) Precautionary information: Warning! Keep out of reach of children. May be fatal if swallowed. May be irritating to the eyes and skin. Combustible liquid. Do not take

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:05Z
Check the source to verify that this is the currentversion before use.

internally. Avoid breathing spray mist and vapors. Do not get in eyes or on skin. If chlorpyrifos or formulations containing chlorpyrifos get into the eyes, wash eyes immediately with large amounts of water, lifting the lower and upper lids occasionally. Get medical attention immediately. Contact lenses should not be worn when working with this chemical. Wash thoroughly after handling. Wash contaminated clothing before reuse. Avoid spraying food crops. Keep away from food, feedstuffs, and domestic water supplies. Keep container closed. Do not use, pour, spill, or store near heat or open flame. Handle concentrate in a ventilated area. Do not apply to water containing valuable crustaceans and fish. Do not store at temperatures above 125°F or below 32°F. NOTE TO PHYSICIAN: Chlorpyrifos is a cholinesterase inhibitor. Treat symptomatically. Atropine is an antidote.

(h) Directions for disposal of insecticide and package.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Contractor assurance of compliance. The contractor's quality program or detailed inspection system shall provide assurance of compliance of all characteristics with the applicable drawing, special packaging instruction, and specification requirements using, as a minimum, the conformance criteria specified herein.

4.1.3 Alternative inspection provisions. Alternative inspection procedures, methods, or equipment, such as statistical process control, tool control, and other types of sampling procedures may be used by the contractor when they provide, as a minimum, the level of quality assurance required by the inspection provisions specified herein. Prior to applying such alternative procedures, methods, or equipment, the contractor shall describe them in

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

a written proposal submitted to the Government for evaluation and approval. (See 6.3.) When required, the contractor shall demonstrate that the effectiveness of each proposed alternative is equal to or better than the quality assurance provisions specified herein. In cases of dispute as to whether the contractor's proposed alternative provides equal quality assurance, the provisions of this specification shall apply. All approved alternative inspection provisions shall be specifically incorporated into the contractor's quality program or detailed inspection system, as applicable.

4.2 Quality conformance inspection.

4.2.1 Lotting. A lot shall consist of the chlorpyrifos emulsifiable concentrate produced by one manufacturer, at one plant, from the same materials, and under essentially the same manufacturing conditions provided the operations is continuous. In the event the process is a batch operation, each batch shall constitute a lot (see 6.4)

4.2.2 Sampling. See 6.5 for sampling and testing precautions.

4.2.2.1 For examination of packaging. Sampling shall be conducted in accordance with table II. The sample unit shall be one filled and closed unit or shipping container, as applicable, ready for shipment.

TABLE II. Sampling for examination of packaging

Number of containers in batch or lot	Number of sample containers
1	1
2 to 15	2
16 to 50	3
51 to 150	5
151 to 500	8
501 to 3,200	13
3,201 to 35,000	20
35,001 to 500,000	32
Over 500,000	50

4.2.2.2 For chlorpyrifos test. Sampling shall be conducted prior to packing or drum closing operations. Three specimens of approximately 1 pint each shall be randomly taken from different parts of each lot and placed in separate suitable clean, dry, closed containers labeled to identify the lot from which they were taken.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

4.2.2.3 For container leakage test. Sampling shall be conducted in accordance with table III. The sample unit shall be one container.

TABLE III. Sampling for container leakage test

Number of containers in batch or lot	Number of sample containers
1	1
2 to 15	2
16 to 25	3
26 to 90	5
91 to 150	8
151 to 500	13
501 to 1,200	20
1,201 to 10,000	32
10,001 to 35,000	50
35,001 to 500,000	80
Over 500,000	125

4.2.3 Inspection procedure.

4.2.3.1 For examination of packaging. Sample unit and shipping containers selected in 4.2.2.1 shall be examined for the characteristics listed below. Failure of any sample unit or shipping container to conform to all characteristics shall be cause for rejection of the lot represented.

(a) Contents per container as specified
(b) Container as specified
(c) Container closure as specified
(d) Container undamaged and not leaking
(e) Container coating correct
(f) Fiberboard pads or partitions correct (when required)
(g) Vermiculite correct
(h) Unitization as specified
(i) Marking correct

4.2.3.2 For chlorpyrifos test. Each sample specimen taken in 4.2.2.2 shall be tested as specified in 4.2.4. Failure of any test by any specimen shall be cause for rejection of the lot represented.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

4.2.3.3 For container leakage test. The sample containers selected in 4.2.2.3 shall be tested as specified in 4.2.5. Failure of any test by any container shall be cause for rejection of the lot represented.

4.2.4 Chlorpyrifos tests. See 6.5 for sampling and testing precaution. Reagent grade chemical shall be used throughout the tests. Where applicable, blank determinations shall be run and corrections applied where significant. Tests shall be conducted as follows:

4.2.4.1 Flash point. Determine flash point in accordance with ASTM D 56.

4.2.4.2 Water content. Determine percent by weight water content in accordance with ASTM E 203.

4.2.4.3 pH of methanol solution. Dilute 1 milliliter (mL) of the specimen with 10 mL of methanol. Measure the pH of the solution at 20°C by means of a pH meter accurate to 0.1 pH.

4.2.4.4 Emulsion stability.

(a) Hard water. Dissolve 0.3037 gram (g) of calcium chloride and 0.1388 g of magnesium chloride hexahydrate in sufficient distilled water to make 1 liter.

(b) Stirrer. Use a power driven stirrer consisting of a glass rod 10 millimeters (mm) in diameter, having a 5-mm diameter rod sealed at right angles to make a T-shaped figure.

(c) Procedure. Place 98 mL of hard water prepared as specified in (a) having a temperature of 80° ± 5°F into a 250-mL beaker and stir at 1,000 revolutions per minute using a stirrer as described in (b). Position the stirrer so that it just clears the beaker bottom and can freely rotate. Add 2 mL of the specimen and continue stirring for 1 minute. Pour the emulsion into a 100-mL glass-stoppered graduated cylinder and allow to stand for 1 hour. Examine under strong transmitted light and record the volume separated (include both sediment at bottom and separation at top). The total separated volume shall be no more than 1.0 mL.

4.2.4.5 Pounds of 0,0-diethyl 0-(3,5,6-trichloro-2-pyridyl) phosphorothioate per gallon.

(a) Apparatus. Use an ultraviolet (UV) spectrophotometer with silica absorption cells having a 1-centimeter light path.

(b) Preparation of calibration curve. Transfer approximately 0.250 g of standard 0,0-diethyl 0-(3,5,6-trichloro-2-pyridyl) phosphorothioate weighed to the nearest 0.1 milligram (mg) to a 250-mL volumetric flask. Dissolve in methanol and dilute to the mark with methanol. Pipet a 5-mL aliquot of the solution into a 100-mL volumetric flask and dilute to the mark with methanol (the concentration of this solution is approximately 50 mg/mL). Pipet 5, 10, 15, and 20 mL of this solution into four separate 25-mL volumetric flasks and

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

dilute each to the mark with methanol. The concentrations of these standard solutions are approximately 10, 20, 30, and 40 mg/mL, respectively. Measure the absorbance of each solution, including the 50 mg/mL solution, at 290 ± 2 nanometers in the UV spectrophotometer. Prepare a calibration curve by plotting the absorbances at 290 ± 2 nanometers versus the respective concentrations in mg/mL on regular graph paper.

(c) Percent by weight 0,0-diethyl 0-(3,5,6-trichloro-2-pyridyl) phosphorothioate. Transfer approximately 0.2 g of the specimen to a tared 50-mL volumetric flask and weigh to the nearest 0.1 mg. Dissolve in methanol and dilute to the mark with methanol. Pipet a 10-mL aliquot of this solution into a 500-mL volumetric flask and dilute to the mark with methanol. Measure the absorbance of the solution at 290 ± 2 nanometers in the UV spectrophotometer under the same conditions used for measuring the standard solutions in (b). Read the concentration of the specimen solution from the calibration curve prepared as specified in (b). Calculate the percent by weight 0,0-diethyl 0-(3,5,6-trichloro-2-pyridyl) phosphorothioate as follows:

$$\text{Percent 0,0-diethyl 0-(3,5,6-trichloro-2-pyridyl) phosphorothioate} = \frac{0.25A}{W}$$

Where: A = Concentration of specimen solution read from calibration curve in micrograms per milliliter
W = Weight of specimen in grams

(d) Procedure. Determine the density of the specimen in accordance with method B of ASTM D 2111 at 20°C and calculate the pounds of chlorpyrifos per gallon of formulation as follows:

$$\text{Pounds per gallon} = 0.0833CD$$

Where: C = Percent by weight 0,0-diethyl 0-(3,5,6-trichloro-2-pyridyl) phosphorothioate
D = Density at 20°C

4.2.5 Container leakage test. Place the container in each of the following positions and leave it in each for a period of 15 minutes:

(a) Upright
(b) Upside down
(c) On one side (or one quadrant)
(d) On one end (or second quadrant)
(e) On other side (or fourth quadrant)

Examine the container after each period for any evidence of leakage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

5. PACKAGING

Note: The metric equivalents given for inch-pound quantities are nominal values provided for informational purposes and should not be considered as quantity requirements.

5.1 Packaging. Packaging (including marking and labeling) shall be in accordance with the applicable requirements of 49 CFR 170 to 199 and the International Civil Aviation Organization - Technical Instructions for Safe Transportation of Dangerous Goods by Air (ICAO-TDGA) or International Maritime Organization - International Maritime Dangerous Goods Code (IMO-IMDGC), as applicable to the mode of transportation. The packaging shall meet the applicable packaging performance tests specified in ICAO-TDGA of IMO-IMDGC, as applicable.

5.1.1 Unit packing.

5.1.1.1 One-gallon (4.0-liter) quantity. A quantity of 1 gallon (+1 1/4 or -0 ounces) (4.0 liters) of chlorpyrifos emulsifiable concentrate shall be unit packed in a nominal 1-gallon (4.0-liter) screw cap container. The container shall be either a fluorinated, high density polyethylene bottle (IP.2) (see 6.6) or an oblong tin-plate can (IP.3) (see 6.2). The tin-plate can shall conform to type V, class 4 of PPP-C-96 and shall be oblong, minimum number 100 tin-plate with an interior coating of two coats of high quality commercial baked-on 60 percent phenolic/40 percent epoxy resin, and shall be with exterior coating plan B with side seam striped. The interior coating shall be certified as being resistant to deterioration due to chlorpyrifos for a minimum of two years. The screw-cap shall be furnished with an aluminum foil facing of minimum 0.0007 inch thickness on a resilient durable liner. A tamper evident seal resistant to the chlorpyrifos shall also be furnished to each closure. The screw-cap shall be tightened to a torque within the range specified by the can manufacturer. There shall be no evidence of leakage of contents when the can is tested as specified in 4.2.5.

5.1.2 Packing.

5.1.2.1 Level A.

5.1.2.1.1 **Five-gallon (20.0-liter) quantity.** A quantity of 5 gallons (+5 or -0 ounces) (20.0 liters) of chlorpyrifos emulsifiable concentrate shall be packed in a nominal 5-gallon (20.0-liter) steel pail conforming to the requirements of a 1A1 container of ICAO-TDGA or IMO-IMDGC, as applicable. In addition, the 1A1 container shall conform to type I, class 4 of PPP-P-704 with an extendable spout no less than 2 inches in length when fully extended. The interior surface of each pail shall be completely lined with two coats of phenolic baking varnish conforming to type II of MIL-V-12276. The thickness of the linings shall be a minimum of 0.0007 inch. Top and bottom seams shall be doped with a styrene-butadiene rubber compound having a total solids content of 73 to 75 percent by weight and a dry specific gravity of 1.36 to 1.38 (see 6.7). The closure shall be gasketed with low density polyethylene and the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

flange gasket shall be formed from butadiene-acrylonitrile copolymer type synthetic rubber (see 6.8).

5.1.2.2 Level B.

5.1.2.2.1 One-gallon (4.0-liter) quantity. Six 1-gallon cans/bottles of chlorpyrifos emulsifiable concentrate shall be packed in a close-fitting fiberboard box conforming to a 4G container of ICAO-TDGA or IMO-IMDGC, as applicable. The 4G container shall conform to class weather-resistant, grade V3c of PPP-B-636. The fiberboard box shall also have a 4 mil polyethylene bag of sufficient size to form a liner. Each can/bottle shall be placed closure end uppermost in a cell formed from half slotted partitions of fiberboard. The partitions shall be an additional two inches in length and width on each side and end (from the can/bottle to interior of the fiberboard box), to accommodate the vermiculite needed to absorb the entire contents of the can/bottle in the event of leakage or breakage (see 6.9). The partitions shall also be an additional 5 inches in depth, again to accommodate the vermiculite. Partitions shall be formed from material conforming to minimum grade V3c of PPP-F-320. The vermiculite shall be at least 2 1/2 inches thick at the top and bottom (from the interior of the fiberboard box to the cans/bottles) and shall also be at least 2 inches wide around the sides and ends of the cans/bottles (see figure I). The liner bag shall then be closed by twisting the excess material at the opening of the bag a minimum of 3 twists and securing the twist with a wire tie. The wire tie shall be tightly twisted a minimum of 4 twists. The box closure flaps shall close without bulging. The fiberboard box shall be closed and reinforced as specified in the appendix to PPP-B-636.

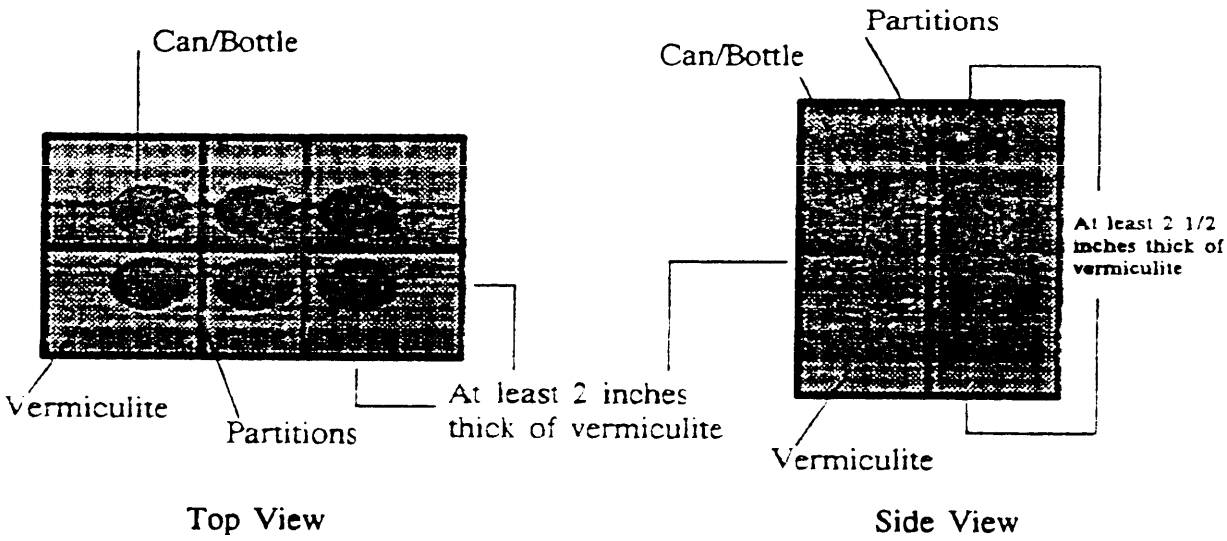


FIGURE I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

associated with the specific avionics application.

5.1.3 **Overpacking.**

5.1.3.1 **One-gallon (4.0-liter) quantity.** One level B pack of one-gallon (4.0-liter) cans/bottles of chlorpyrifos emulsifiable concentrate shall be overpacked upright in a close-fitting wirebound wood box conforming to class 3, style optional of PPP-B-585. Motion of contents shall be prevented by inserting fiberboard pads, conforming to a minimum grade V3c of PPP-F-320, where needed. The box shall be closed and reinforced as specified in PPP-B-585.

5.2 **Marking.** Containers and pallet loads shall be marked in accordance with DOT and international regulations, and MIL-STD-129. Each container shall also be marked to show lot or batch number and the date of manufacture of the chlorpyrifos. In addition to the labeling specified in 3.3, the flash point of the chlorpyrifos emulsifiable concentrate and the following information shall be prominently printed on each container:

FOR MILITARY USE ONLY
NOT FOR RESALE UNDER THIS LABEL

Contains 4 pounds of 0,0-diethyl 0-(3,5,6-trichloro-2-pyridyl) phosphorothioate per gallon.

5.2.1 **Container compliance markings.** Each shipping container shall be marked in accordance with ICAO-TDGA or IMO-IMDGC, as applicable.

5.2.2 **Hazard class label.** Each shipping container and pallet load shall be labeled in accordance with 49 CFR 170 to 179 and either ICAO-TDGA or IMO-IMDGC, as applicable.

5.2.3 **Proper shipping name.** Each shipping container and pallet load shall be marked with the proper shipping name in accordance with 49 CFR 170 to 179 and either ICAO-TDGA or IMO-IMDGC, as applicable.

5.2.4 **Precautionary markings.** Each unit pack, pack, and shipping container shall be marked or labeled, as applicable, as specified in 3.3.

5.2.5 **Overpack markings.** Each overpack for the 1-gallon quantities shall be marked "Inner packages comply with prescribed specification 4G."

5.3 **Palletization.** A uniform quantity of packs of chlorpyrifos emulsifiable concentrate shall be palletized in accordance with MIL-STD-147, load type I for the boxes of 1-gallon quantity and load type III for those of 5-gallon quantity, and using the type IV softwood pallet of NN-P-71.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. Chlorpyrifos emulsifiable concentrate is intended for use against the insects specified in 3.3(f).

6.2 Acquisition requirements. Acquisition documents must specify the following:

(a) Title, number, and date of this specification
(b) Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see section 2)
(c) Level of packing required (see 5.1.2)
(d) If the 1-gallon quantity of chlorpyrifos shall be unit packed in a fluorinated, high density polyethylene bottle or an oblong tin-plate can (see 5.1.1.1)

6.3 Submission of alternative inspection provisions. Proposed alternative inspection provisions should be submitted by the contractor to the procuring contracting officer for evaluation and approval by the technical activity responsible for preparation of this specification.

6.4 Batch. A batch is defined as that quantity of material which has been manufactured by some unit chemical process or subjected to some physical mixing operation intended to make the final product substantially uniform.

6.5 Sampling and testing precautions. This specification covers inspection of chemical material which is potentially dangerous to personnel. All applicable safety rules, regulations, and procedures must be followed in the sampling and testing of this material.

6.6 Fluorinated high density polyethylene bottle. A bottle known to be satisfactory for this usage is the CONOLENE fluorinated high density polyethylene, nominal 1-gallon capacity bottle available from Continental Plastics Company, Touhy Office Plaza, 1400 East Touhy Avenue, Suite 118, Des Plaines, IL 60018.

6.7 Doping material. "Darex Drum Compound L14" has been found satisfactory for doping the 5-gallon pail and the 30-gallon drum. This material is available from W.R. Grace Company, Dewey and Almy Chemical Division, 62 Whittenmore Avenue, Cambridge, MA 02140.

6.8 Flange gasket material. The following materials have been found satisfactory for use as flange gaskets: "Butaprene" available from Firestone Tire and Rubber Company: "Chemigum" available from Goodyear Tire and Rubber Company; "Hycar" available from


Source: https://assist.dla.mil -- Downloaded: 202640-26T04:05Z
Check the source to verify that this is the currentversion before use.

B.F. Goodrich Chemical Company; and "Perbunam" available from Stanco Distribution and Company.

6.9 Vermiculite. The national stock number for the vermiculite to be used for the 1-gallon quantity (see 5.1.2.2.1) is 5640-01-324-2664.

6.10 Significant places. For the purpose of determining conformance with this specification, an observed or calculated value should be rounded off "to the nearest unit" in the last right-hand place of figures used in expressing the limiting value, in accordance with the rounding-off method of ASTM E 29.

6.11 Part identification numbering system. A recommended system is as follows:



6.12 Changes from previous issues. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

6.13 Subject term (key word) listing.

0,0-diethyl 0-(3,5,6-trichloro-2-pyridyl) phosphorothioate

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

Custodian:

Army - EA
Navy - YD
Air Force - 68

Review activities:

Army - GL, MD
Navy - MC, MS
DLA - GS

User activity:

Navy - SH

Preparing activity:

Army - EA

Project No. 6840-1029

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-I-51325C	921113

3. DOCUMENT TITLE
INSECTICIDE, CHLORPYRIFOS, EMULSIFIABLE CONCENTRATE

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
U.S. Army Edgewood Research, Development and Engineering Center	(1) Commercial (410) 671-3259	(2) AUTOVON DSN 584-3259
c. ADDRESS (Include Zip Code) Cdr, U.S. Army ERDEC ATTN: SCBRD-ENE (Std/Specs/Pkg) Aberdeen Proving Ground, MD 21010-5423	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 Previous editions are obsolete 198/290

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.