MIL-S-25093B(USAF)
19 March 1963
Superseding
MIL-S-25093A(USAF)
26 December 1962

MILITARY SPECIFICATION

SEA RESCUE KITS, DROPPABLE

1. SCOPE

1.1 Scope. - This specification covers droppable sea rescue kits to be used by survivors at sea.

1.2 Classification

1.2.1 Types. - This specification covers sea rescue kits of the following types:

Type MA-1 contains two F-2B twenty man life rafts.

Type MA-2 contains two E-2B six man life rafts.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of the specification to the extent specified herein.

SPECIFICATIONS

Federal

L-S-626	Sponges, Cellulose-Type
UU-C-282	Chipboard; Plain
DDD-T-551	Towels, Terry Cloth
GGG-P-471	Pliers
PPP-B-601	Boxes, Wood, Cleated Plywood
PPP-B-636	Boxes, Fiberboard
PPP-B-640	Boxes, Fiberboard, Corrugated, Triple Wall
PPP-F-320	Fiberboard, Sheet Stock and Cut Shapes

Military

MIL-B-18	Batteries, Dry
JAN-P-100	Packaging and Packing for Overseas Shipment, General Specification
MIL-P-116	Preservation, Methods of.
MIL-L-655	Lipstick, Anti-Chap and Sunburn Protective
MIL-G-822	Glove Shells, Leather, M-1949

FSC 4220

Source: https://assist.dla.mil -- Downloaded: 20261O-20T03:36Z
Check the source to verify that this is the current version before use.

MIL-G-835	Glove Inserts, Wool, M-1949
MIL-B-844	Blankets, Bed, Wool
MIL-F-2409	Food Packet, Survival, ST
MIL-A-3339	Anchors, Sea, Life Raft
MIL-G-4085	Goggles, Dark Adaptation
MIL-R-4874	Rope, Polyethylene
MIL-C-5040	Cord, Nylon
MIL-D-5531	Desalter Kit, Sea Water, Mark 2
MIL-H-5593	Hose; Aircraft, Low Pressure, Flexible
MIL-R-5773	Raft, Pneumatic, Six Man Type, E-2B
MIL-D-5850	Distillation Kits, Sea Water, Solar
MIL-F-6218	Fishing Kit, Survival
MIL-R-6238	Raincoat, Survival Kit
MIL-S-6330	Accessory Kits, Life Raft
MIL-P-7249	Paulin, Lightweight
MIL-T-7807	Thread, Nylon
MIL-F-8209	Flashlight, Type A9
MIL-P-8258	Pumps, Hand, Air
MIL-B-8571	Bag, Water Storage, Plastic
MIL-R-9131	Raft, Pneumatic, Twenty Man Type F 2B
MIL-S-11262	Sunburn-Preventive Preparation, Cream Paste
MIL-W-15117	Water, Drinking, Canned, Emergency
MIL-M-18371	Mirror, Signaling, Search and Rescue (MK-3)
MIL-O-20582	Opener, Can, Hand, Folding
MIL-B-22205	Bag, Transparent, Flexible, Heat Sealable for Packaging Application
MIL-B-40042	Box, Match, Waterproof

STANDARDS

Military

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of U. S. Military Property
MIL-STD-143	Specifications and Standards, Order of Precedence for Selection of
MS26529-2	Oar, Metal Sectional

DRAWINGS

Air Force

44D9376	Bucket Assembly - Life Raft, Bailing
53B6241	Adapter, Air Hand Pump
54D6403	Harness Assembly, Supply Container, Sea Rescue Kit

GPO 801158-1

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:36Z
Check the source to verify that this is the current version before use.

54C6405	Container, Supply, Sea Rescue Kit, Outer
54C6406	Container, Supply, Sea Rescue Kit, Inner
54C6407	Lanyard - Sea Rescue Kit
61D4315-1	Container, Life Raft, 6 Man, E2B
61D4315-2	Container, Life Raft, 20 Man, F2B

AIR FORCE MANUALS

AFM 64-5	USAF Survival Manual
AFM 67-1	USAF Supply Manual Vol. I
AFM 71-4	Packaging and Handling of Dangerous Materials for Transportation by Military Aircraft

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. - The following documents form a part of this specification, to the extent specified herein; unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Interstate Commerce Commission
Regulation No. 13 - (T. C. George's Tarrif No. 13)
(Applications for copies should be addressed to T. C. George, Agent, 63 Vesey St, New York 7, N. Y.)

3. REQUIREMENTS

3.1 Components. - Each kit shall consist of five containers as specified in table I with containers 1 and 5 being raft containers and containers 2, 3, and 4 being supply containers.

3.2 Selection of specification and standards. - Specifications and standards for necessary commodities and services not specified herein shall be selected in accordance with MIL-STD-143.

3.3 Raft containers. - Containers 1 and 5 shall be raft containers and shall be identical except that container 5 does not contain a 210 foot length of polyethylene rope. The containers shall be assembled as shown in figure 1 and as noted below.

3.3.1 The raft containers shall be fabricated in accordance with Drawing 61D4315-1 for the 6 man life raft container and 61D4315-2 for the 20 man life raft container.

3.3.2 Rafts. - The 20 man raft shall conform to MIL-R-9131. The 6

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:36Z
Check the source to verify that this is the current version before use.

TABLE I

	COMPONENTS	SPECIFICATION OR PART NO.	CONTAINER QUANTITY No. 1	No. 2	No. 3	No. 4	No. 5
1.	Adapter, Hand Pump, Hose	53B6241		1		1	
2.	Anchor, Sea Life Raft, Size 2 Appl. MA-1 Kit	MIL-A-3339	2	1	1	1	2
	Anchor, Sea Life Raft, Size 2 Appl. MA-2 Kit	MIL-A-3339	1	1	1	1	1
3.	Bag, Water, Storage, Size A	MIL-B-8571		4		4	
4.	Battery, BA-1315/U	MIL-B-18			1		
5.	Blanket, Bed Type, Grade B, Size 2	MIL-B-844		2	2	2	
6.	Box, Match, Waterproof (Watson)	MIL-B-40042		1		1	
7.	Bucket Assy., Life Raft, Bailing	44D9376		1		1	
8.	Can Opener	MIL-O-20582			2		
9.	Can Opener	S/N 7330-242-3506		2		2	
10.	Canopy, Appl. MA-1 Kit Only	MIL-R-9131		1		1	
11.	Canopy Mast, Appl. MA-1 Kit Only	MIL-R-9131		1		1	
12.	Canopy Supports, Appl. MA-1 Kit Only	MIL-R-9131		6		6	
13.	Container, Life Raft, Appl. MA-1 Kit	61D4315-2	1				1
	Container, Life Raft, Appl. MA-2 Kit	61D4315-1	1				1
14.	Container, Supply Inner, Sea Rescue Kit	54C6406		1	1	1	
15.	Container, Supply Outer, Sea Rescue Kit	54C6405		1	1	1	
16.	Cord, Nylon, Type III, 25' Length	MIL-C-5040	1				1
17.	Desalter Kit, Mark 2	MIL-D-5531		2		2	
18.	Distillation Kit, Solar, Type A-1	MIL-D-5850, Class B		1		1	
19.	Fishing Kit, Survival	MIL-F-6218			1		
20.	Food Packet, Survival ST	MIL-F-2409		2	2	2	
21.	Glove, Inser[illegible]	MIL-G-835		1		1	
22.	Glove, Shell	MIL-G-822		1		1	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:36Z
Check the source to verify that this is the current version before use.

TABLE I (Continued)

		SPECIFICATION OR PART NO.	CONTAINER No. 1	No. 2	No. 3	No. 4	No. 5
			QUANTITY				
23.	Goggles, Sun	MIL-G-4085		3		3	
24.	Harness Assembly; Supply Container, Sea Rescue Kit	54D6403-1		1		1	
		54D6403-2			1		
25.	Kit, First Aid	S/N 6545-299-8313		1		1	
26.	Kit, Repair, Life Raft	MIL-S-6330		1		1	
27.	Lamp Assy, Flashlight A-9	MIL-F-8209			1		
28.	Lanyard, Sea Rescue Kit	54C6407	1				1
29.	Lipstick, Anti-Chap	MIL-L-655		2	2	2	
30.	Manual, Survival	AFM 64-5			1		
31.	Matches, Safety with Striking Card			40		40	
32.	Medical Instrument and Supply Set	S/N 6545-927-3000			1		
33.	Mirror, Signalling	MIL-M-18371		1		1	
34.	Oar, Life Raft (3 Piece)	MS26529-2		1		1	
35.	Paulin, Life Raft, Size 77, Appl. MA-2 Kit Only	MIL-P-7249		1		1	
36.	Pliers (Package with Repair Kit)	GGG-P-471		1		1	
37.	Pump, Hand, Air Type III	MIL-P-8258		1		1	
38.	Radio Receiver	RT-285A/URC11			1		
39.	Raft, Pneumatic, Six-Man Type, E-2B, Appl. MA-2 Kit Only	MIL-R-5773	1				1
40.	Raft, Pneumatic, Twenty-Man Type, F-2B, Appl. MA-1 Kit Only	MIL-R-9131	1				1
41.	Raincoat, Survival	MIL-R-6238		2	2	2	
42.	Rope, Polyethylene, 210' Length	MIL-R-4874	1	1	1	1	
43.	Signal, MK 13, Mod. 0	B11290		3	3	3	
44.	Sponge, Cellulose	L-S-626		1		1	
45.	Sunburn Preventive	MIL-S-11262		2		2	
46.	Towel, Terry Cloth, Size 20" X 40"	DDD-T-551		1	1	1	
47.	Vest, Radio Carrier	S/N 8465-630-2944			1		
48.	Water, Canned	MIL-W-15117		3		3	

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T03:36Z
Check the source to verify that this is the current version before use.

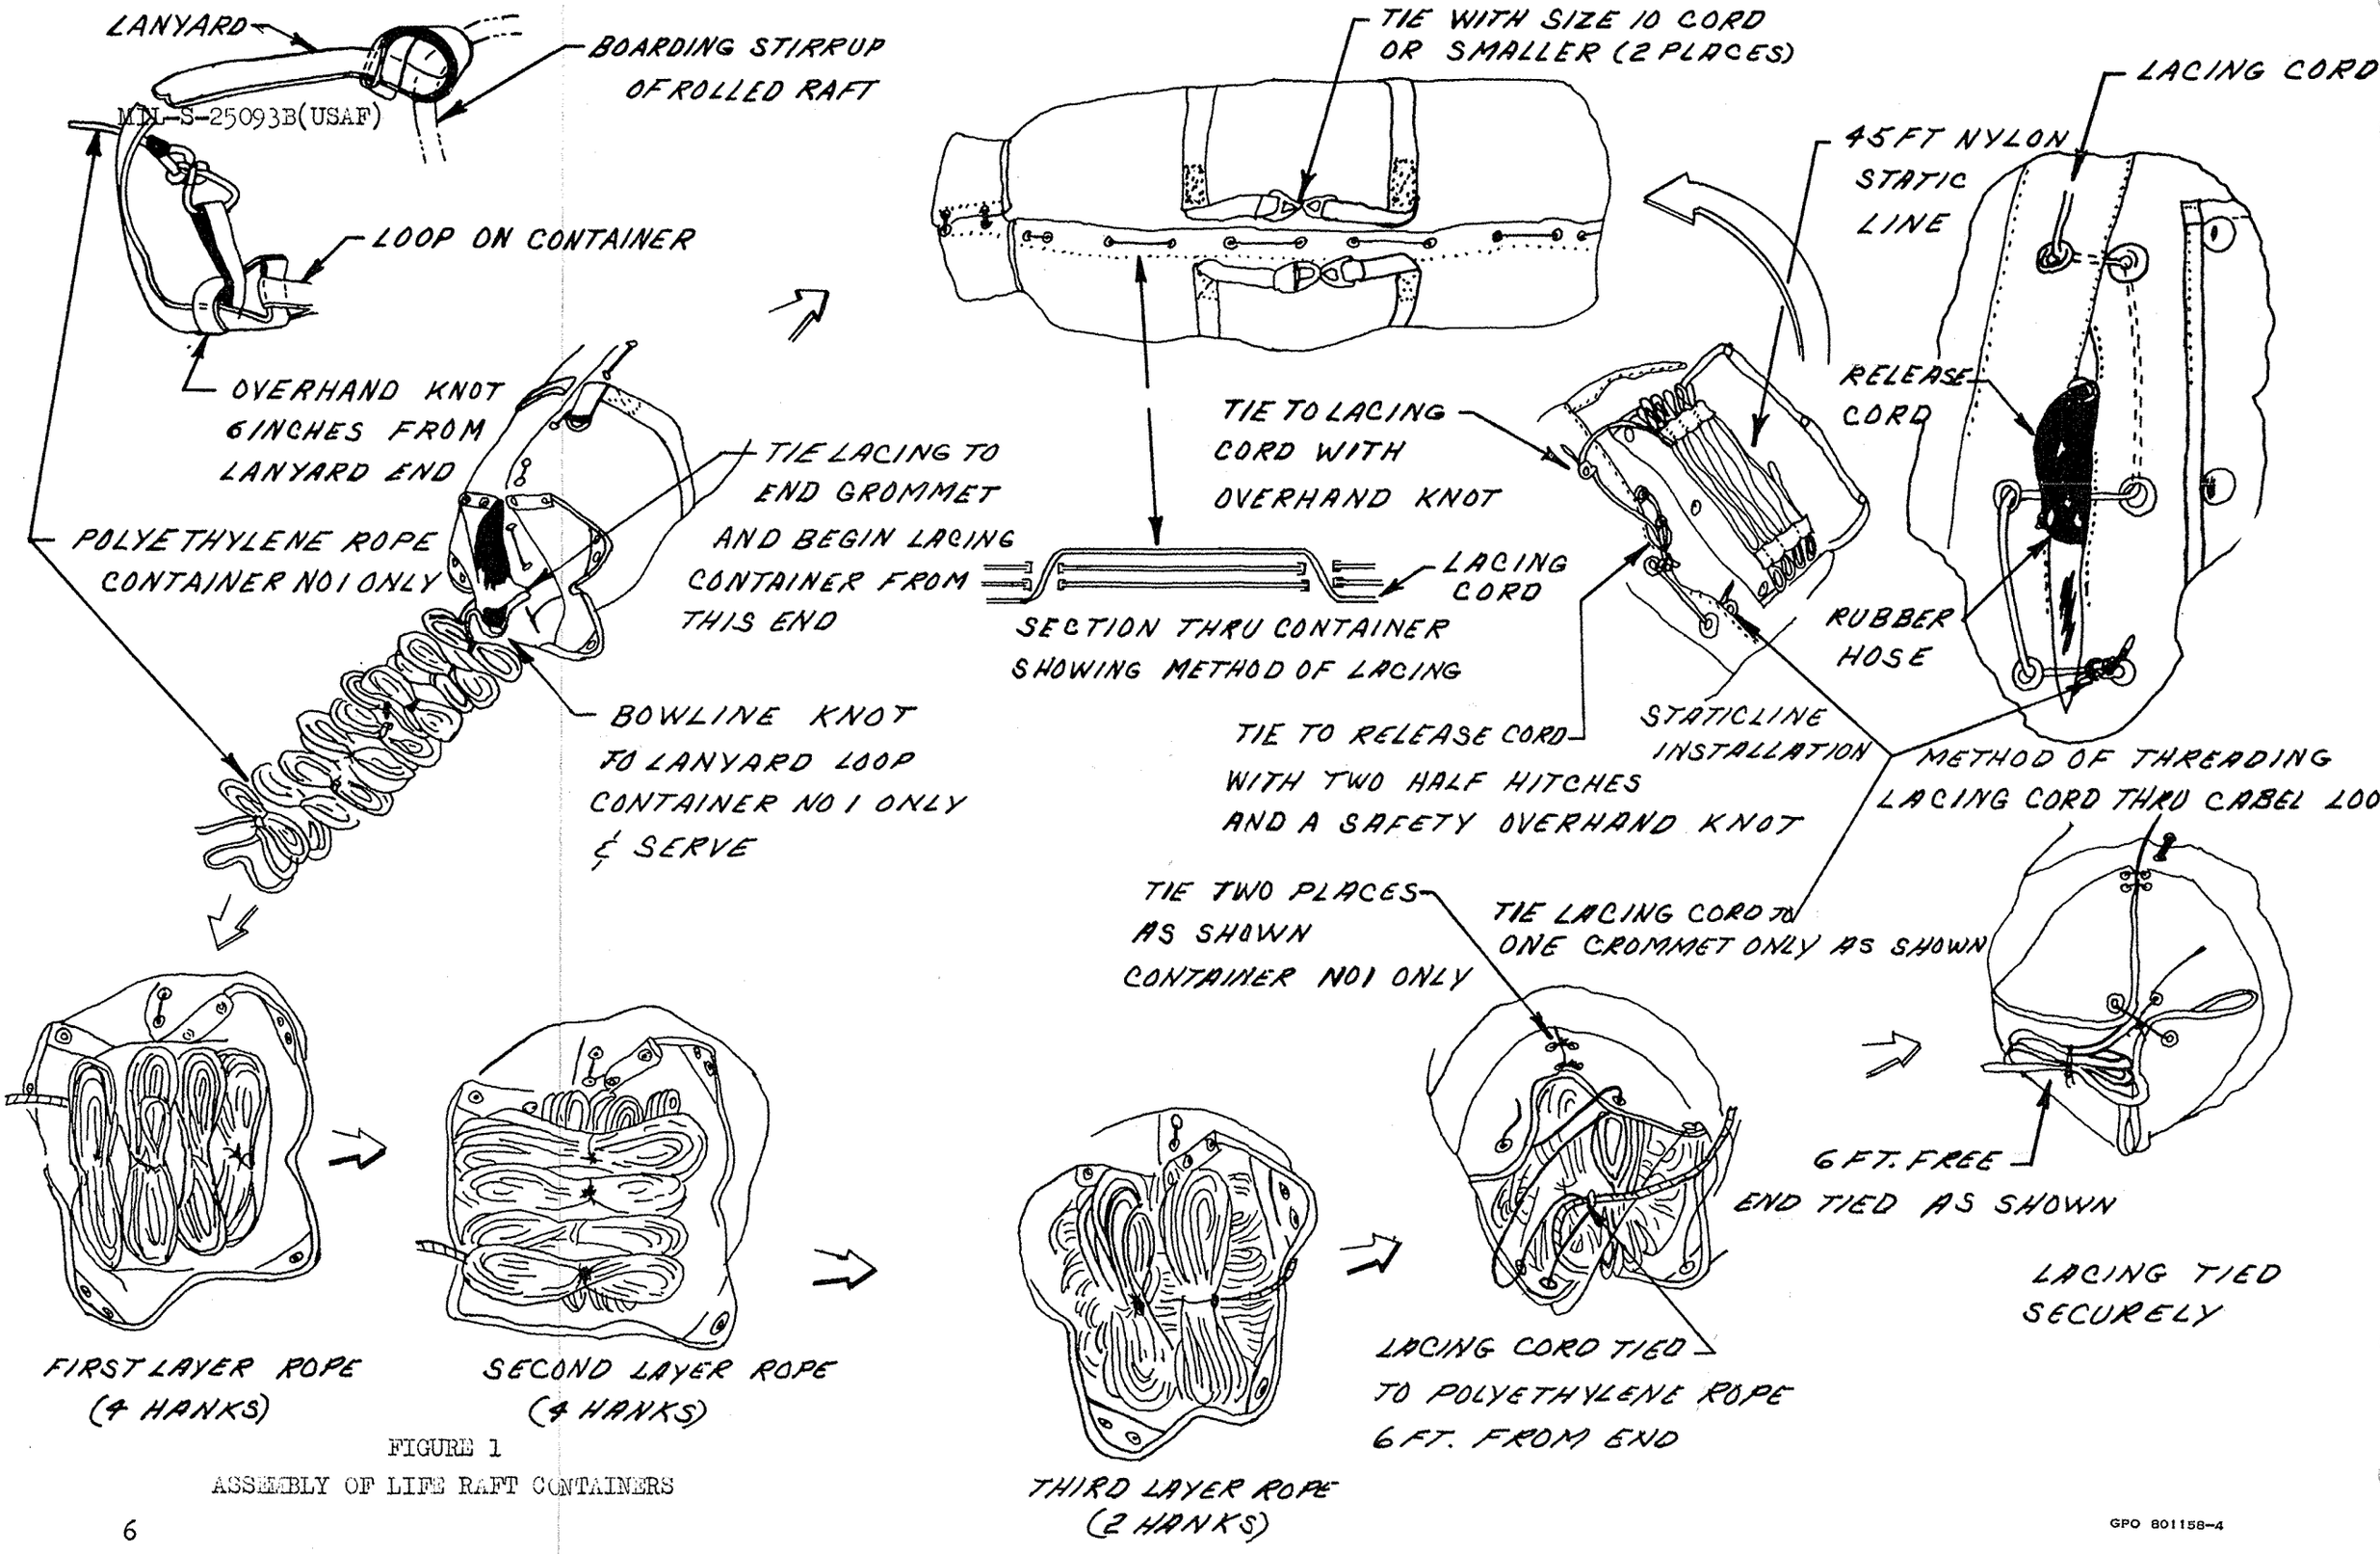


FIGURE 1
ASSEMBLY OF LIFE RAFT CONTAINERS

GPO 801158-4

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:36Z
Check the source to verify that this is the current version before use.

man raft shall conform to MIL-R-5773.

3.3.2.1 CO_2 cylinder assembly release cord. - The CO_2 cylinder assembly shall be provided with a release cord as shown on figure 2. With the valve or head assembly set for the down-pull, a 4 foot length of nylon cord conforming to MIL-C-5040, type III, shall be slipped through the loop of the release cable. The cord ends shall be knotted and the two ends tied with a surgeons' knot. A 20 inch length of $\frac{1}{2}$ inch ID rubber hose conforming to MIL-H-5593 shall be placed over the nylon cord and over the end of the cable housing. The hose shall extend over the housing approximately 2 to 3 inches.

3.3.3 Sea anchors, MA-1 kit. - The mooring line of the sea anchors shall be tied with two half-hitches to the lifeline and lifeline loops at the location shown on figure 2. The stowing of the line shall be such that it will easily deploy when the sea anchor is subjected to the airstream of the falling raft. The body of the sea anchor shall be folded and stowed between the raft's upper and lower tubes as shown on figure 2.

3.3.4 Raft folding procedure. - The raft, completely evacuated of air and all mattress valves closed, shall be folded in accordance with figure 2 for F-2B raft, and as shown in figure 3 through 6 for E-2B life raft.

3.3.5 Lanyard. - The lanyard, fabricated in accordance with Drawing 54C6407, shall connect the raft and container.


3.3.6 Container lacing. - The raft containers shall be laced with nylon cord as shown on figure 1. The cord shall be type II, size 10 in accordance with MIL-T-7807.

3.3.7 Static line. - The static line, with ends melted to prevent fraying, shall be attached and stowed as shown on figure 1 so that it will deploy from center of pocket.


3.3.8 Polyethylene rope. - The polyethylene rope required for container 1 only shall be tied in 10 hanks, with nylon cord, and stowed as shown on figure 2. The nylon cord shall be type II, size 3, conforming to MIL-T-7807. The rope ends shall be melted to prevent fraying.

3.4 Supply containers. - Containers 2, 3, and 4 shall be supply containers. Containers 2 and 4 shall be identical. However, containers 2 and 4 for the MA-1 kit shall contain a canopy with canopy mast and canopy supports while containers 2 and 4 for the MA-2 kit shall contain a paulin. Otherwise the same articles shall be included in the supply containers for both kits.


Source: https://assist.dla.mil -- Downloaded: 202610-20T03:36Z
Check the source to verify that this is the current version before use.

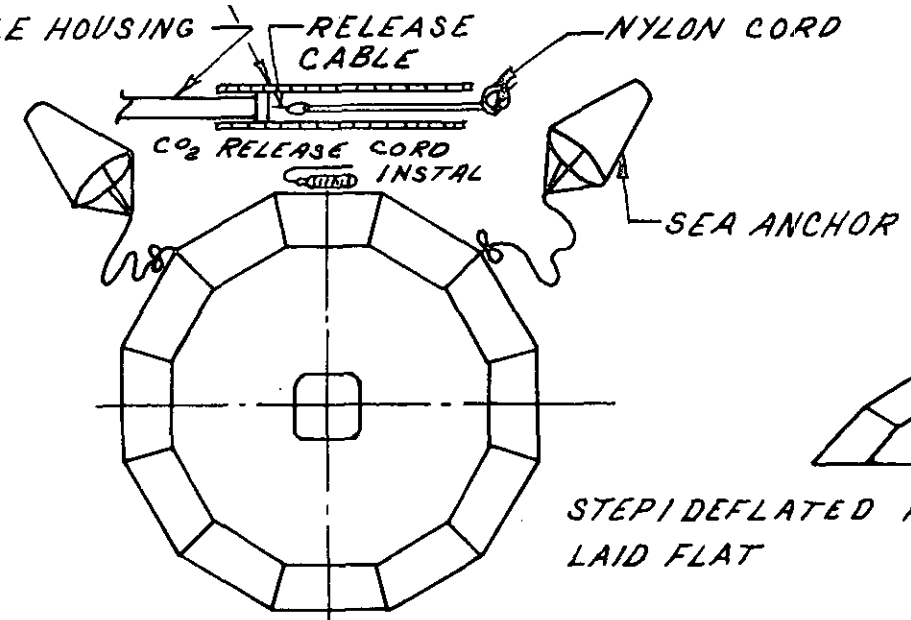


STEP 1 DEFLATED RAFT LAID FLAT

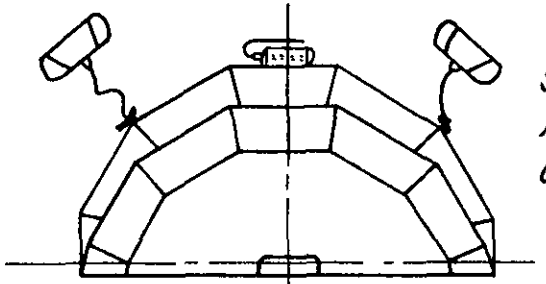


STEP 2 FOLD RAFT IN HALF BELOW CENTER LINE




STEP 3 FOLD RIGHT HALF OVER




SEA ANCHOR FOLDING PROCEDURE

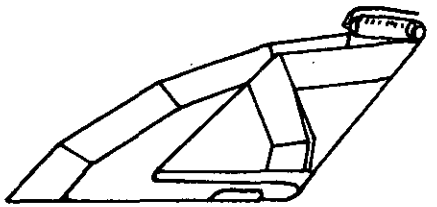

STEP 4 FOLD TOP FLAP BACK

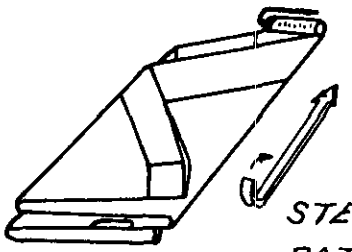

STEP 5 FOLD BOTTOM FLAP UNDER AND ROLL RAFT



COMPLETELY FOLDED AND ROLLED RAFT BEFORE PLACEMENT IN CONTAINER

FIGURE 2
FOLDING PROCEDURE FOR F-2B LIFE RAFT

Source: https://assist.dla.mil -- Downloaded: 20260-20T03:36Z
Check the source to verify that this is the current version before use.

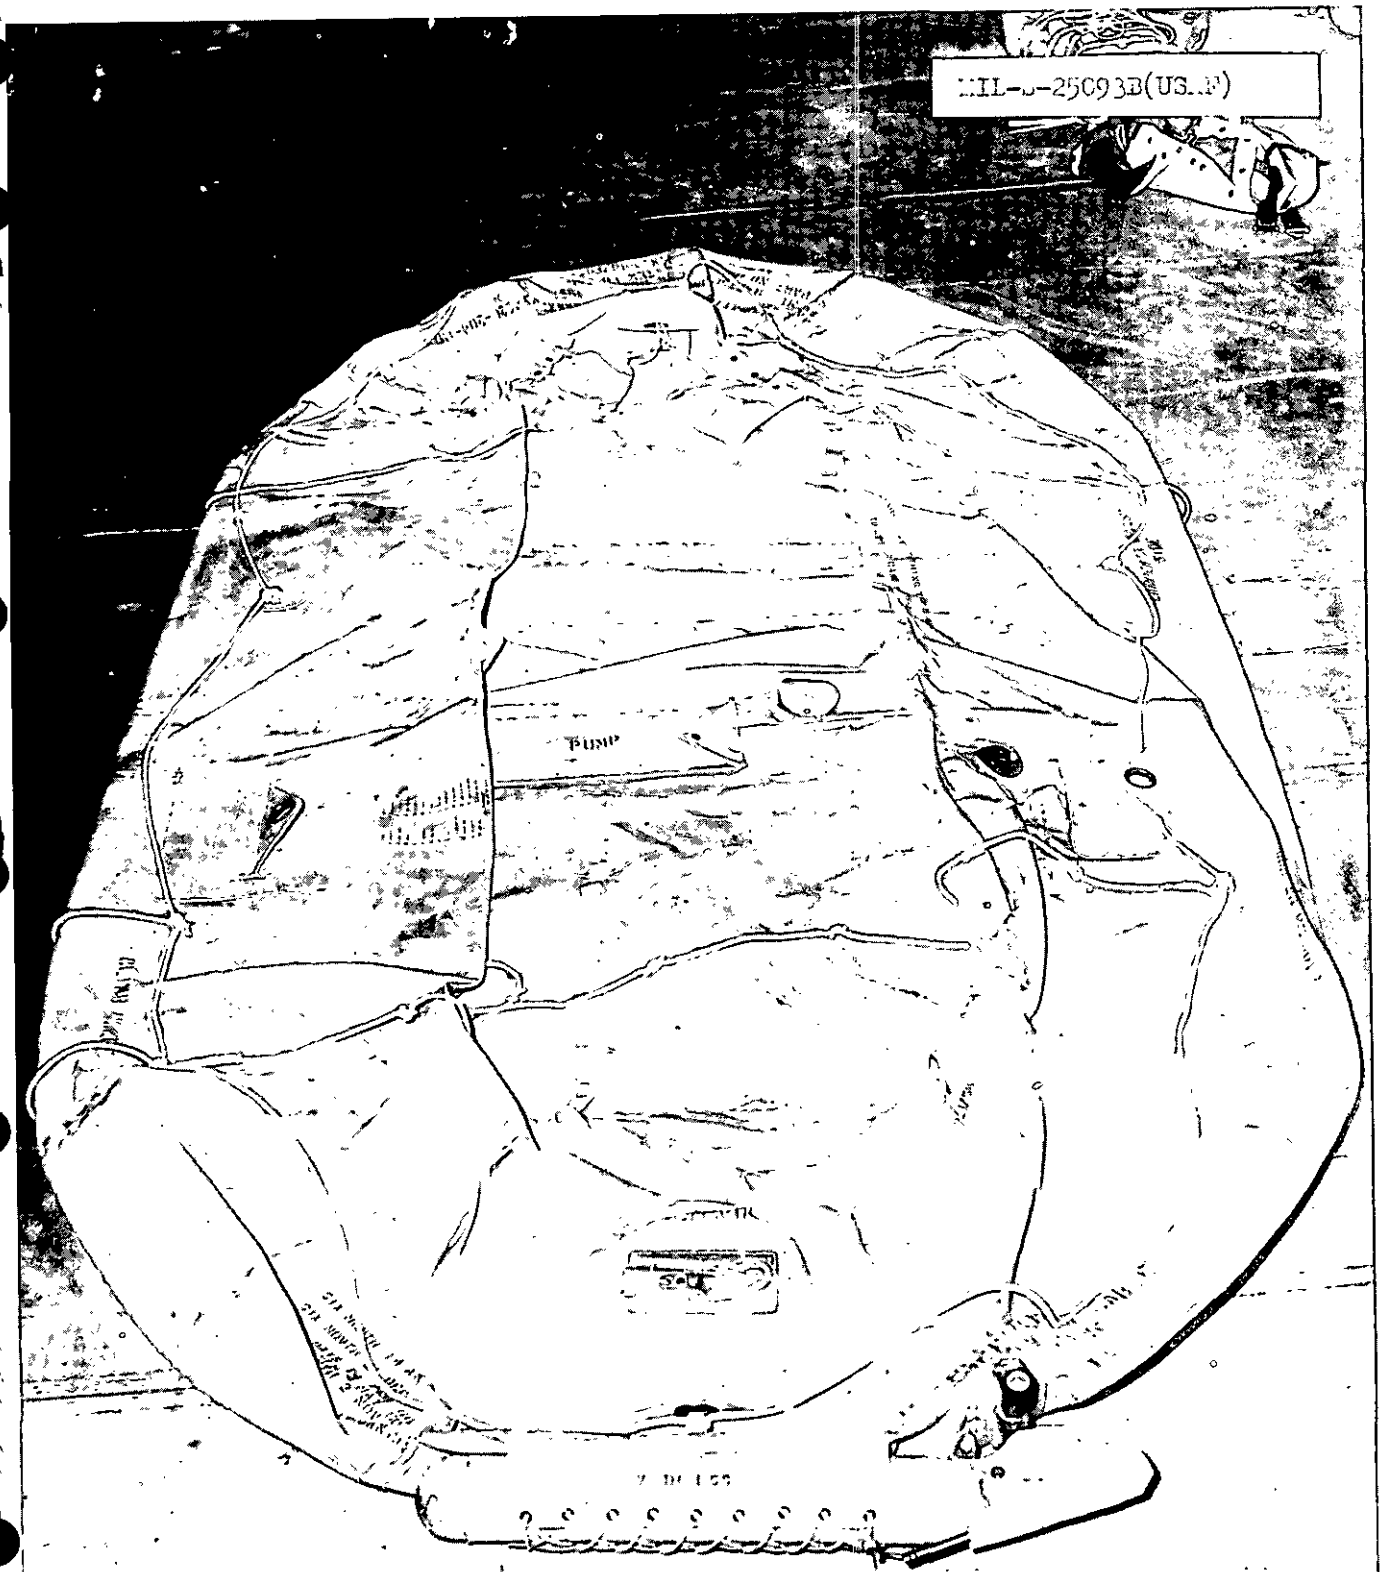


Figure 3 - B-2B Raft Unfolded

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:36Z
Check the source to verify that this is the current version before use.



Figure 4 - Folding Procedure for T-23 Raft

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:36Z
Check the source to verify that this is the current version before use.

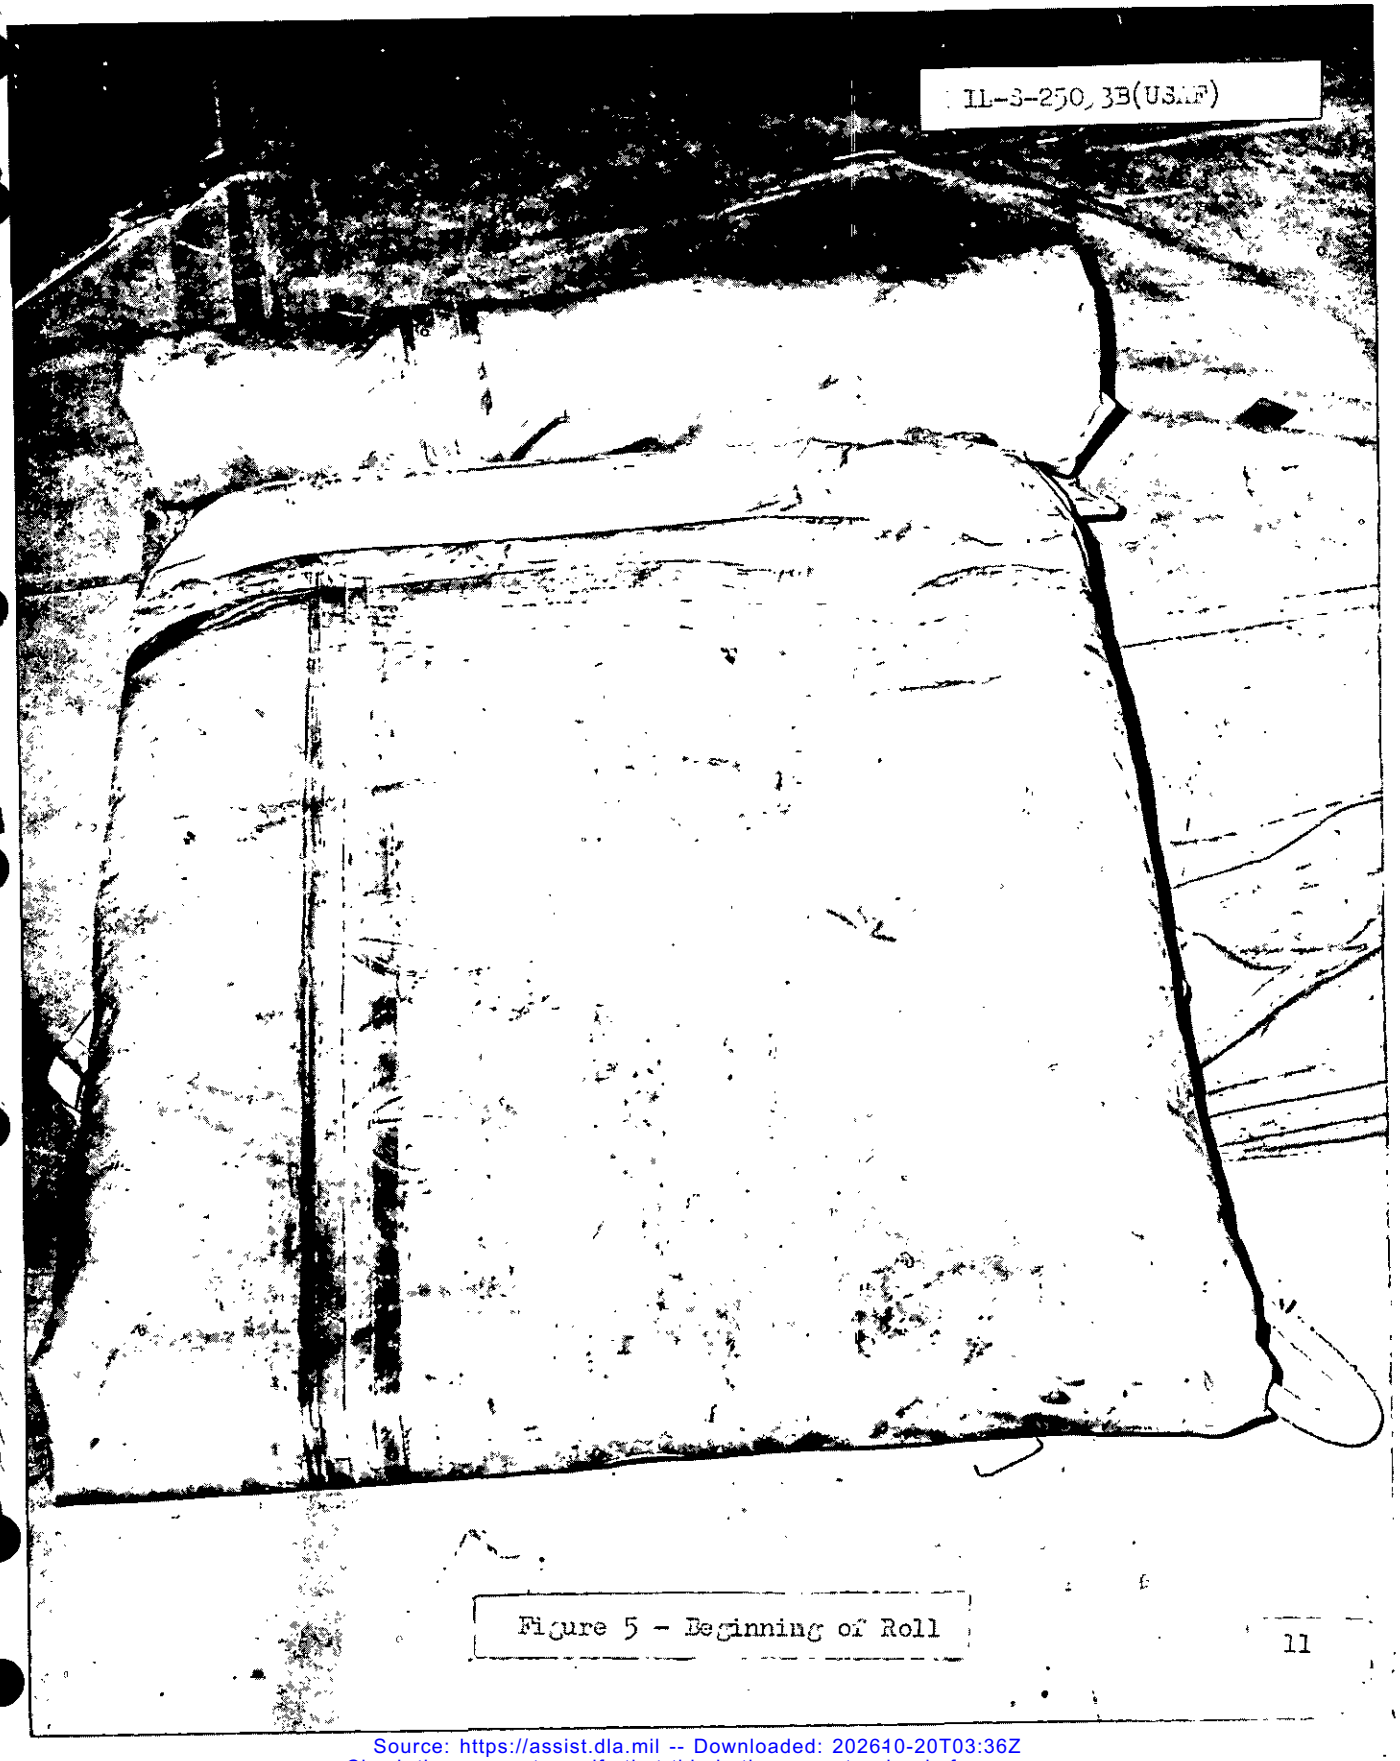


Figure 5 - Beginning of Roll

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:36Z
Check the source to verify that this is the current version before use.



Figure 6 - Raft Completely Folded and Rolled

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:36Z
Check the source to verify that this is the current version before use.

3.4.1 The outer and inner containers shall be fabricated in accordance with Drawings 5406405 and 5406406 respectively.

3.4.2 The harness assemblies shall be fabricated in accordance with Drawing No. 5406403.

3.4.3 Assembling of containers. - The inner container shall be placed in an assembly frame, similar to figure 7, having inside dimensions 7½ X 11 X 37 inches with the 11 X 37 sides open. The inner container and blankets shall be placed as shown in figures 8 and 9 respectively. After the supplies have been placed in the container it shall be closed and tied as shown on figures 10 - 13. The cord in figure 13 shall be tied with slip knots.

3.4.3.1 The inner container shall be placed inside the outer container and the outer container closed and tied as shown in figures 14 - 18.

3.4.3.2 The polyethylene rope shall be tied in 10 hanks and stowed as shown in figure 2. The cord with which the hanks are tied shall be Type II, Size 3, conforming to MIL-T-7807. The rope ends shall be melted to prevent fraying. A sea anchor shall be folded and placed in the rope compartment of the harness assembly.

3.4.3.3 The harness assembly shall be installed on all supply containers as shown in figures 19 and 20.

3.5 Special packaging

3.5.1 Radio receiver shall be inserted in a bag conforming to Specification MIL-B-22205, Type III.

3.5.1.1 Radio receiver, battery, cable, and vest shall be packed in a style RSC container conforming to Specification PPP-B-636, using laminated triple wall fiberboard, conforming to that of Specification PPP-B-640, to form interior cushioning (See Fig 21, 22, and 23).

3.5.2 Pump. - The pump shall be inserted into a chipboard tube.

3.5.3 Chipboard tube. - The chipboard tube shall be ¼ inch or more in thickness, 3-5/8 inches inside diameter, 13 inches long, and shall be fabricated in accordance with existing commercial standards for chipboard tubing. The chipboard material shall conform to UU-C-282.

3.5.4 Canopy. - The canopy shall be folded as shown on figure 24.

3.5.5 Matches. - Matches as indicated in Table I shall be strike-on-card type safety matches. The card shall be placed in the match

Source: https://assist.dla.mil -- Downloaded: 202640-20T03:36Z
Check the source to verify that this is the current version before use.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:36Z
Check the source to verify that this is the current version before use.

Figure 6 - Inner container in assembly frame

Source: https://assist.dla.mil -- Downloaded: 20260-20T03:36Z
Check the source to verify that this is the current version before use.

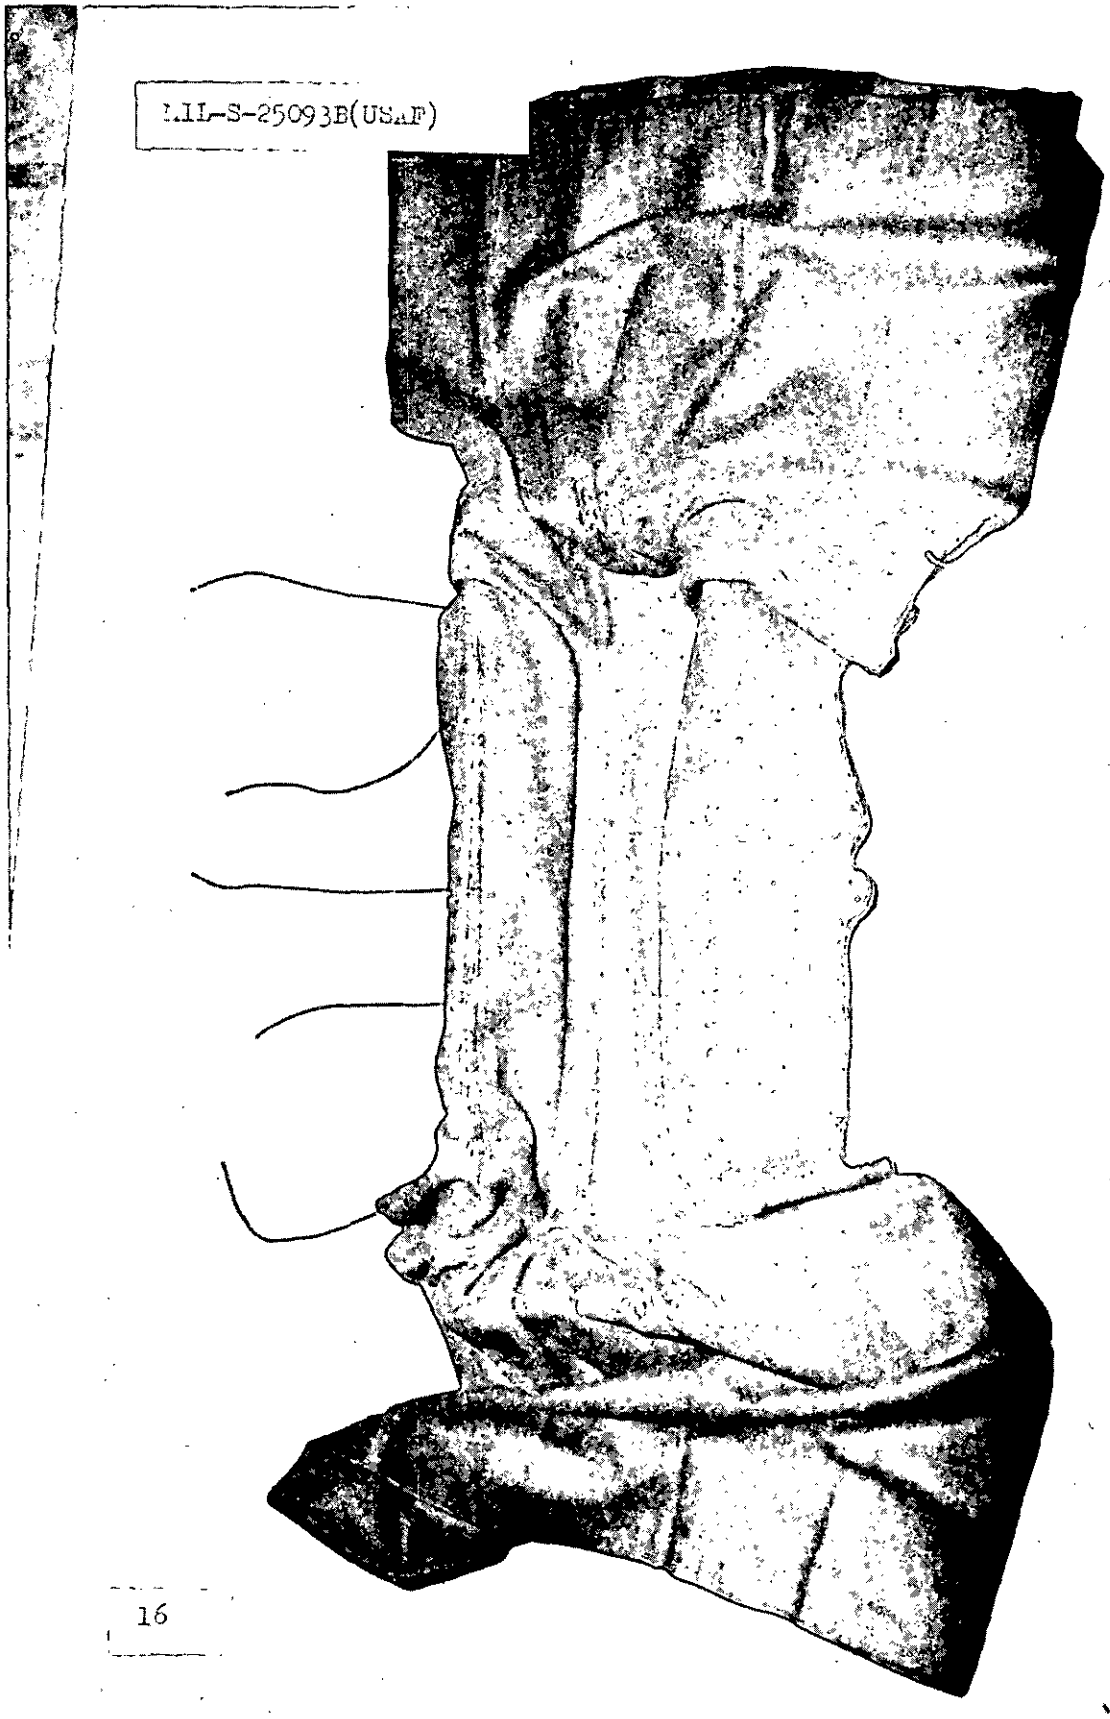


Figure 9 - Blanket in Place

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:36Z
Check the source to verify that this is the current version before use.

Figure 10 - Packed Inner Container Ready for Closing

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:36Z
Check the source to verify that this is the current version before use.

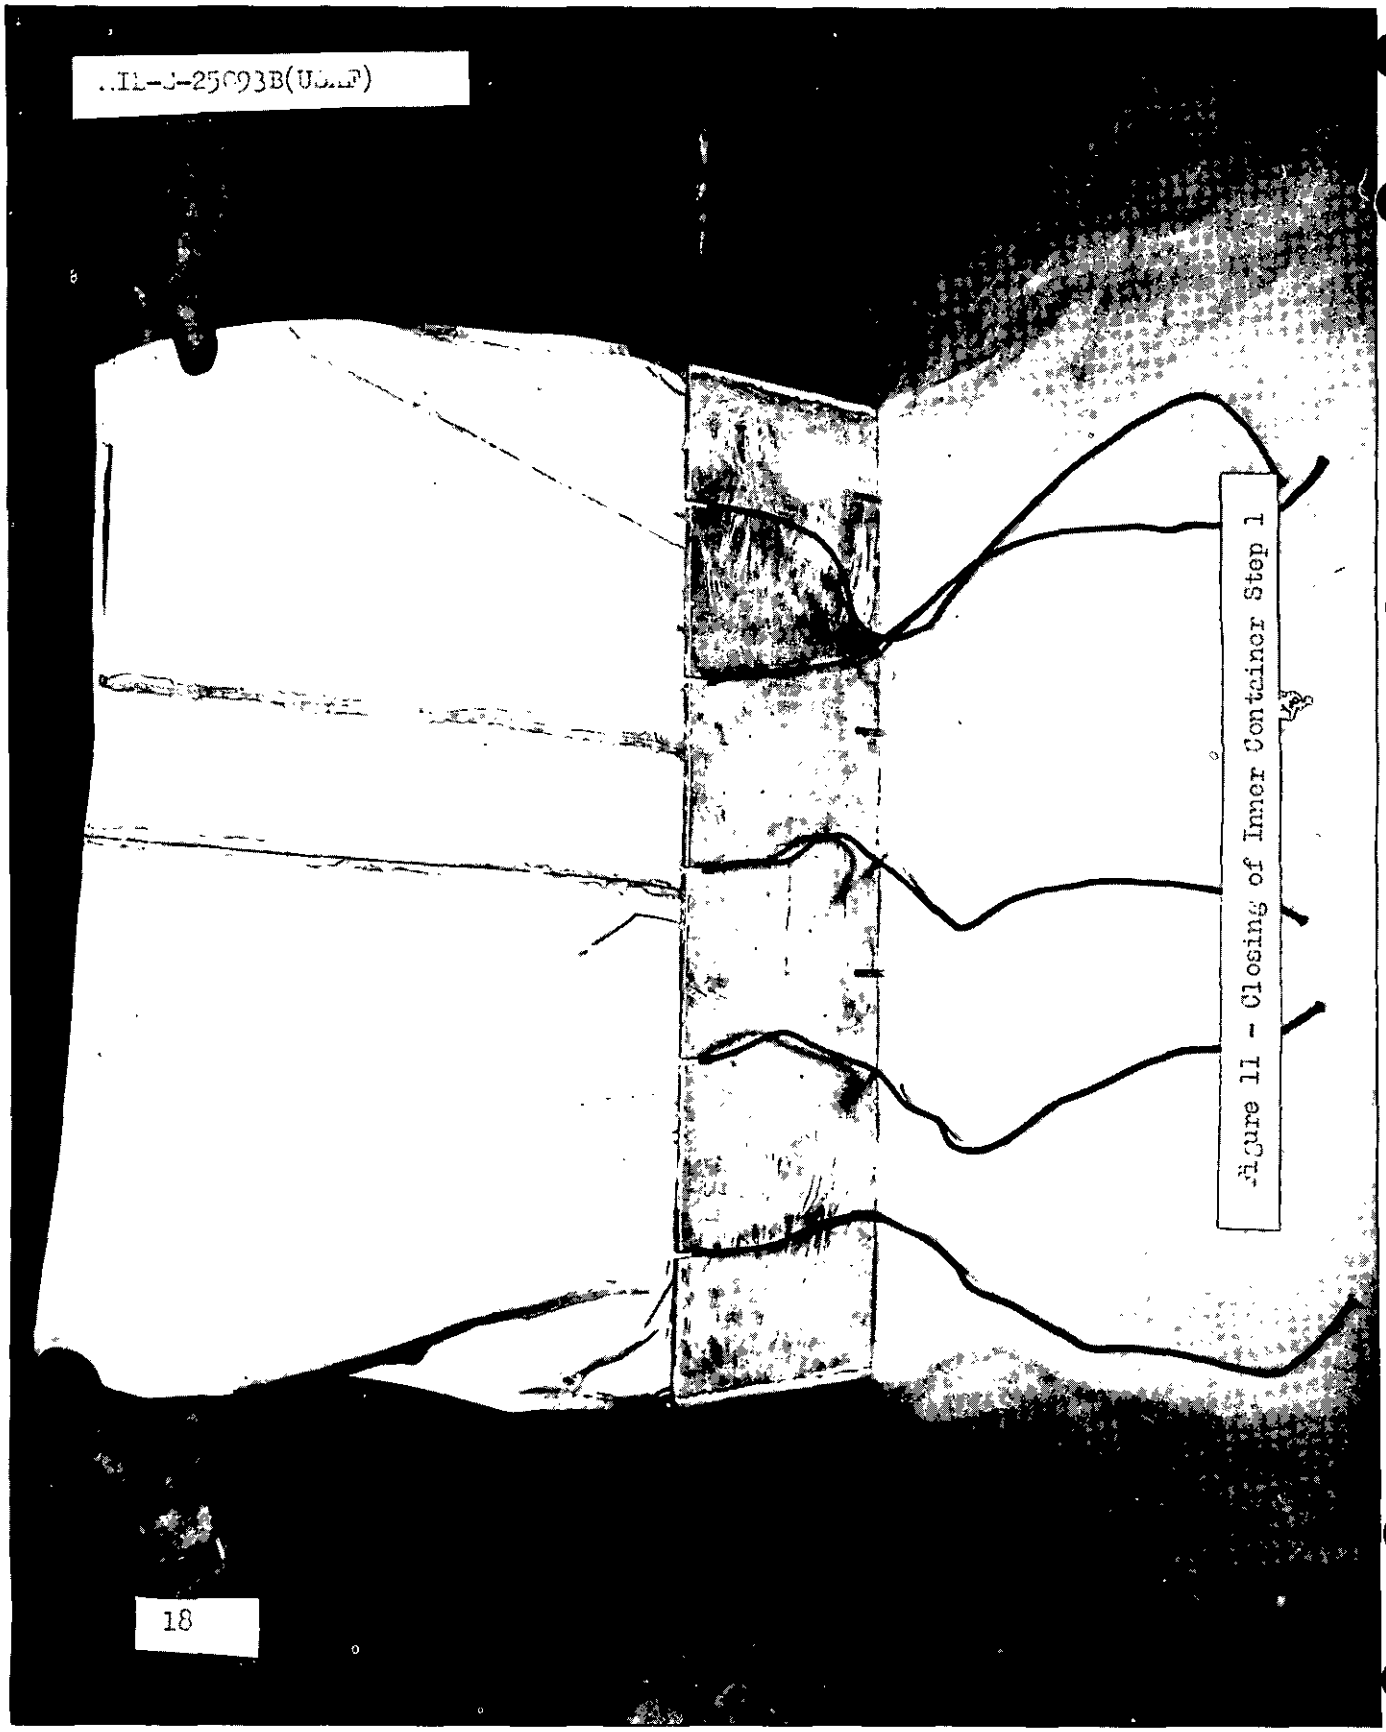


Figure 11 - Closing of Inner Container Step 1

Source: https://assist.dla.mil -- Downloaded: 20260-20T03:36Z
Check the source to verify that this is the current version before use.

Figure 12 - Closing of Inner Container Step 2

Source: https://assist.dla.mil -- Downloaded: 20260-20T03:36Z
Check the source to verify that this is the current version before use.

Figure 13 - Inner Container Closed and Tied

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:36Z
Check the source to verify that this is the current version before use.

Figure 14 - Closing of Outer Container Step 1

Source: https://assist.dla.mil -- Downloaded: 20260-20T03:36Z
Check the source to verify that this is the current version before use.

Figure 15 - Closing of Outer Container Step 2

Source: https://assist.dla.mil -- Downloaded: 20260-20T03:36Z
Check the source to verify that this is the current version before use.

Figure 16 - Closing of Outer Container Step 3

Source: https://assist.dla.mil -- Downloaded: 20260-20T03:36Z
Check the source to verify that this is the current version before use.



Figure 17 - Fixing of Outer Container Step 1

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:36Z
Check the source to verify that this is the current version before use.

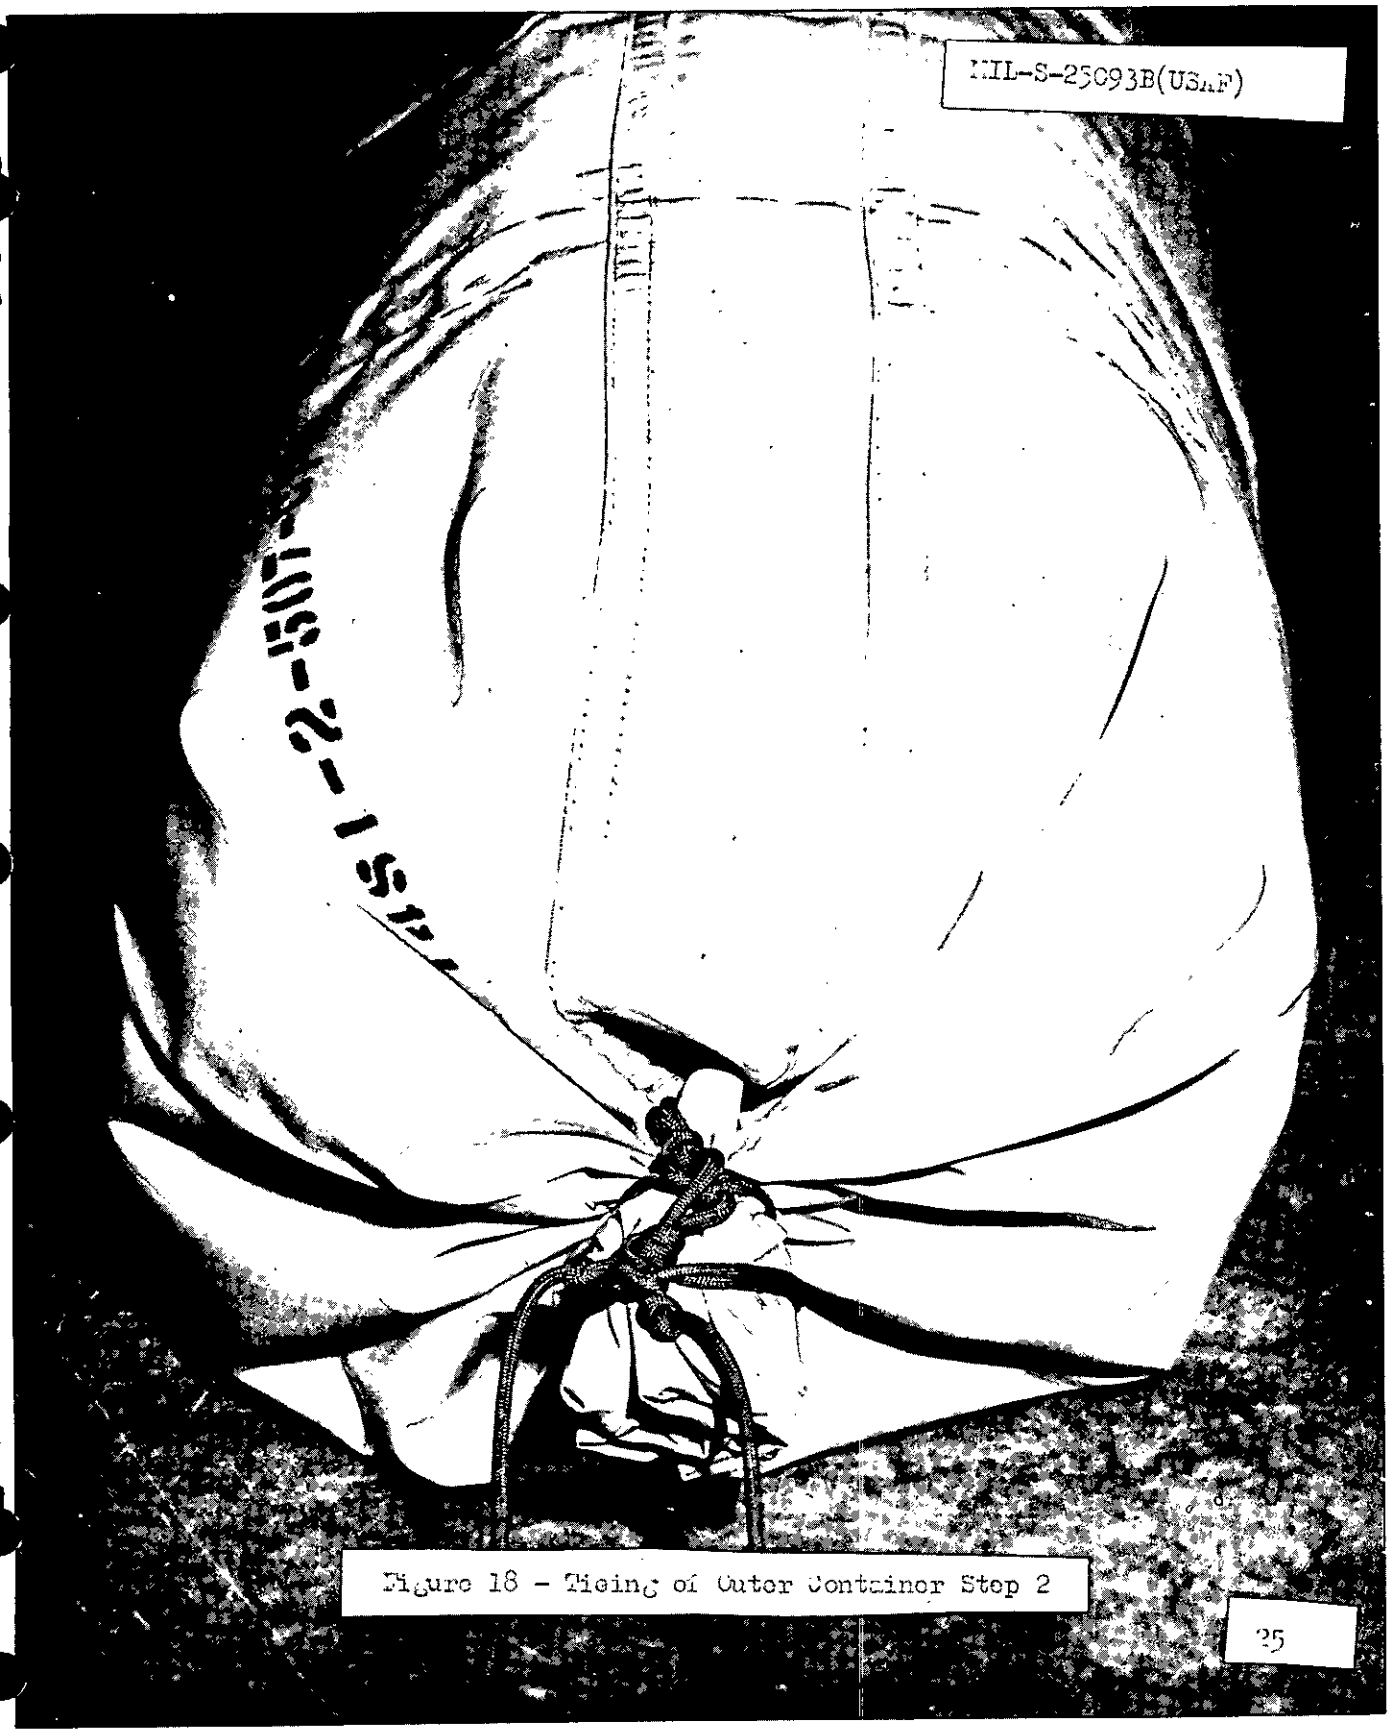


Figure 18 - Tieing of Outer Container Step 2

Source: https://assist.dla.mil -- Downloaded: 20260-20T03:36Z
Check the source to verify that this is the current version before use.

Figure 19 - Assembling of Harness Assembly and Supply Container

Source: https://assist.dla.mil -- Downloaded: 20260-20T03:36Z
Check the source to verify that this is the current version before use.

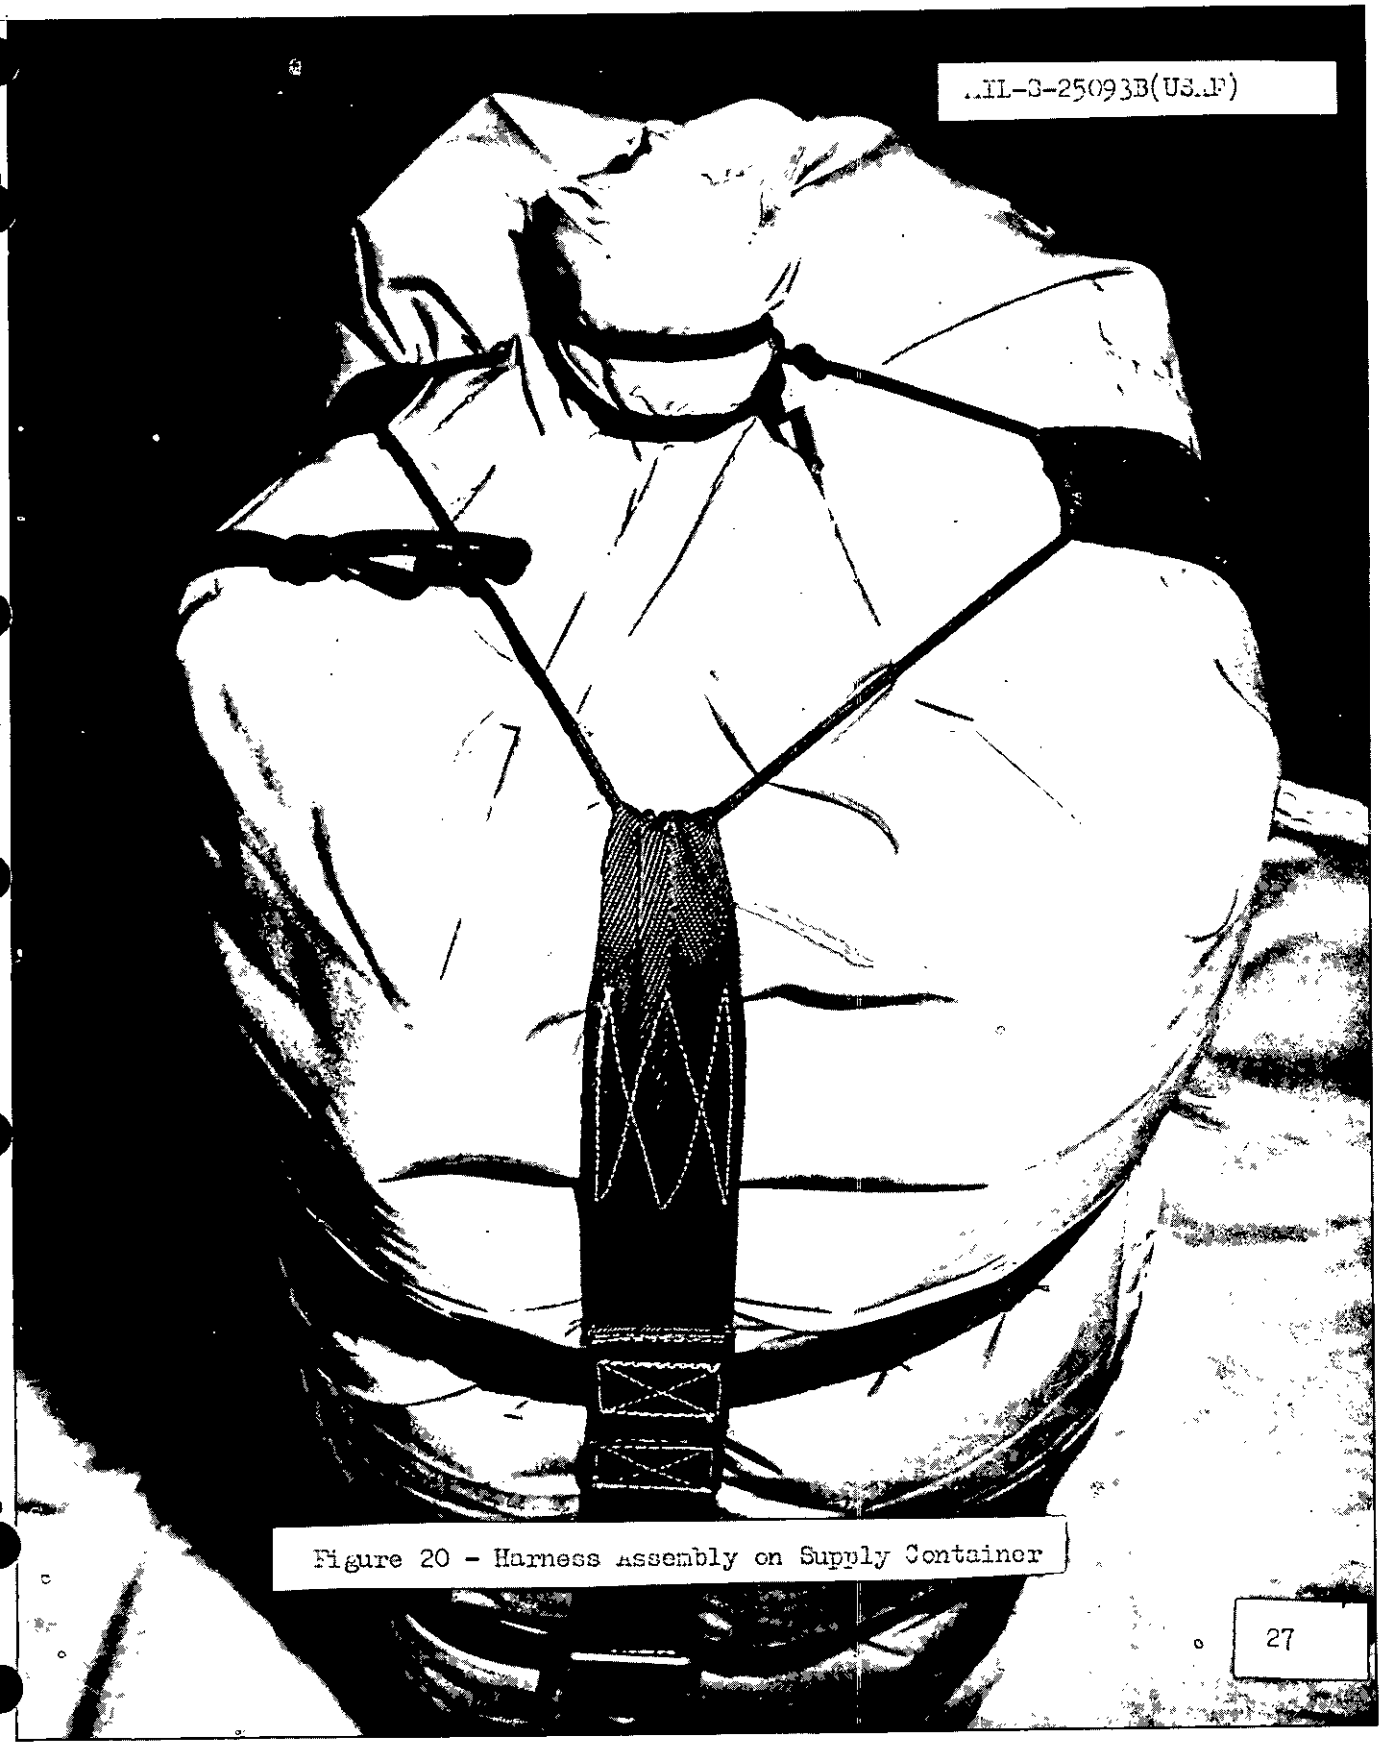


Figure 20 - Harness Assembly on Supply Container

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T03:36Z
Check the source to verify that this is the current version before use.

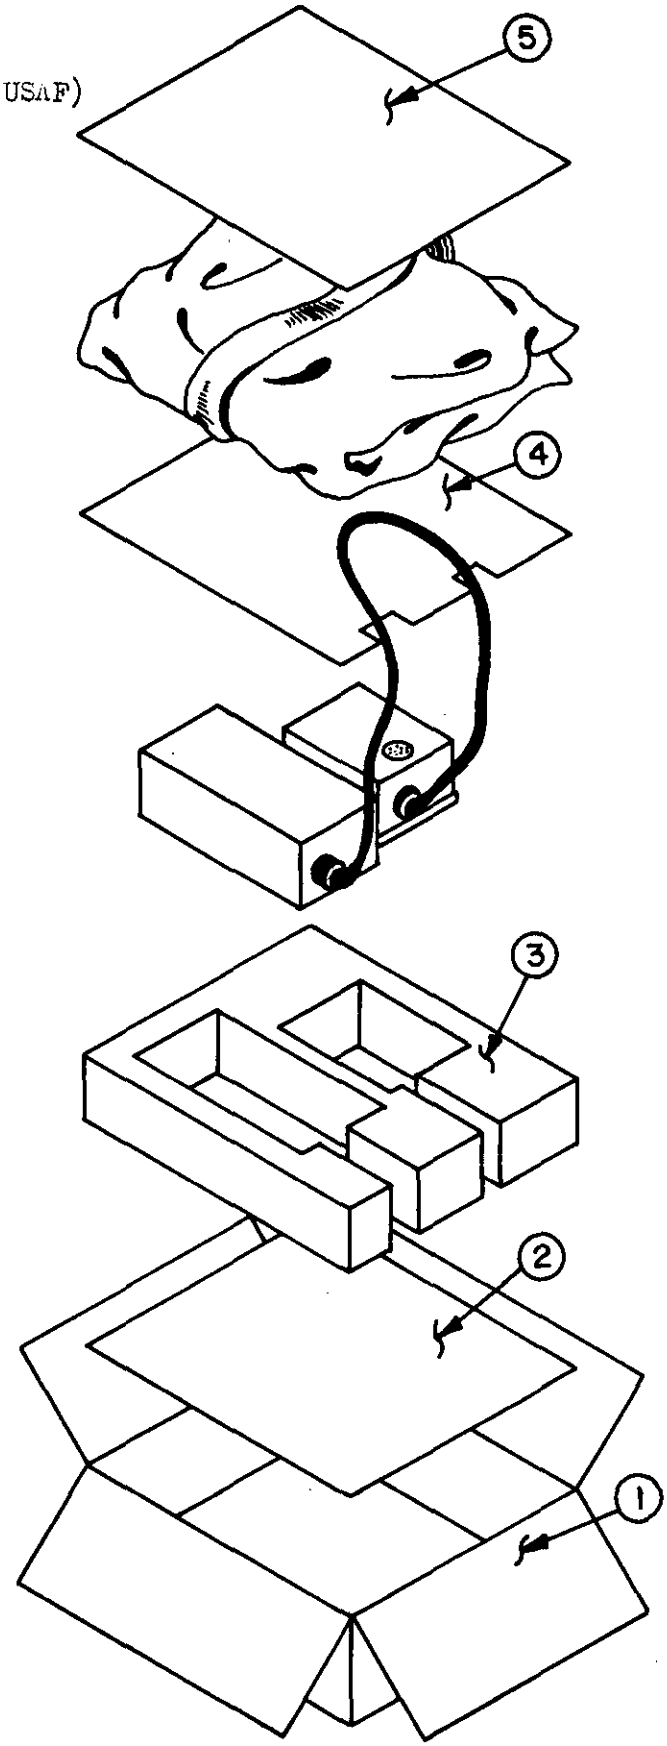


FIGURE 21
PACKAGING OF RADIO UNITS AND ACCESSORIES

Source: https://assist.dla.mil - Downloaded: 2026-02-20T03:03:36Z
Check the source to verify that this is the current version before use.


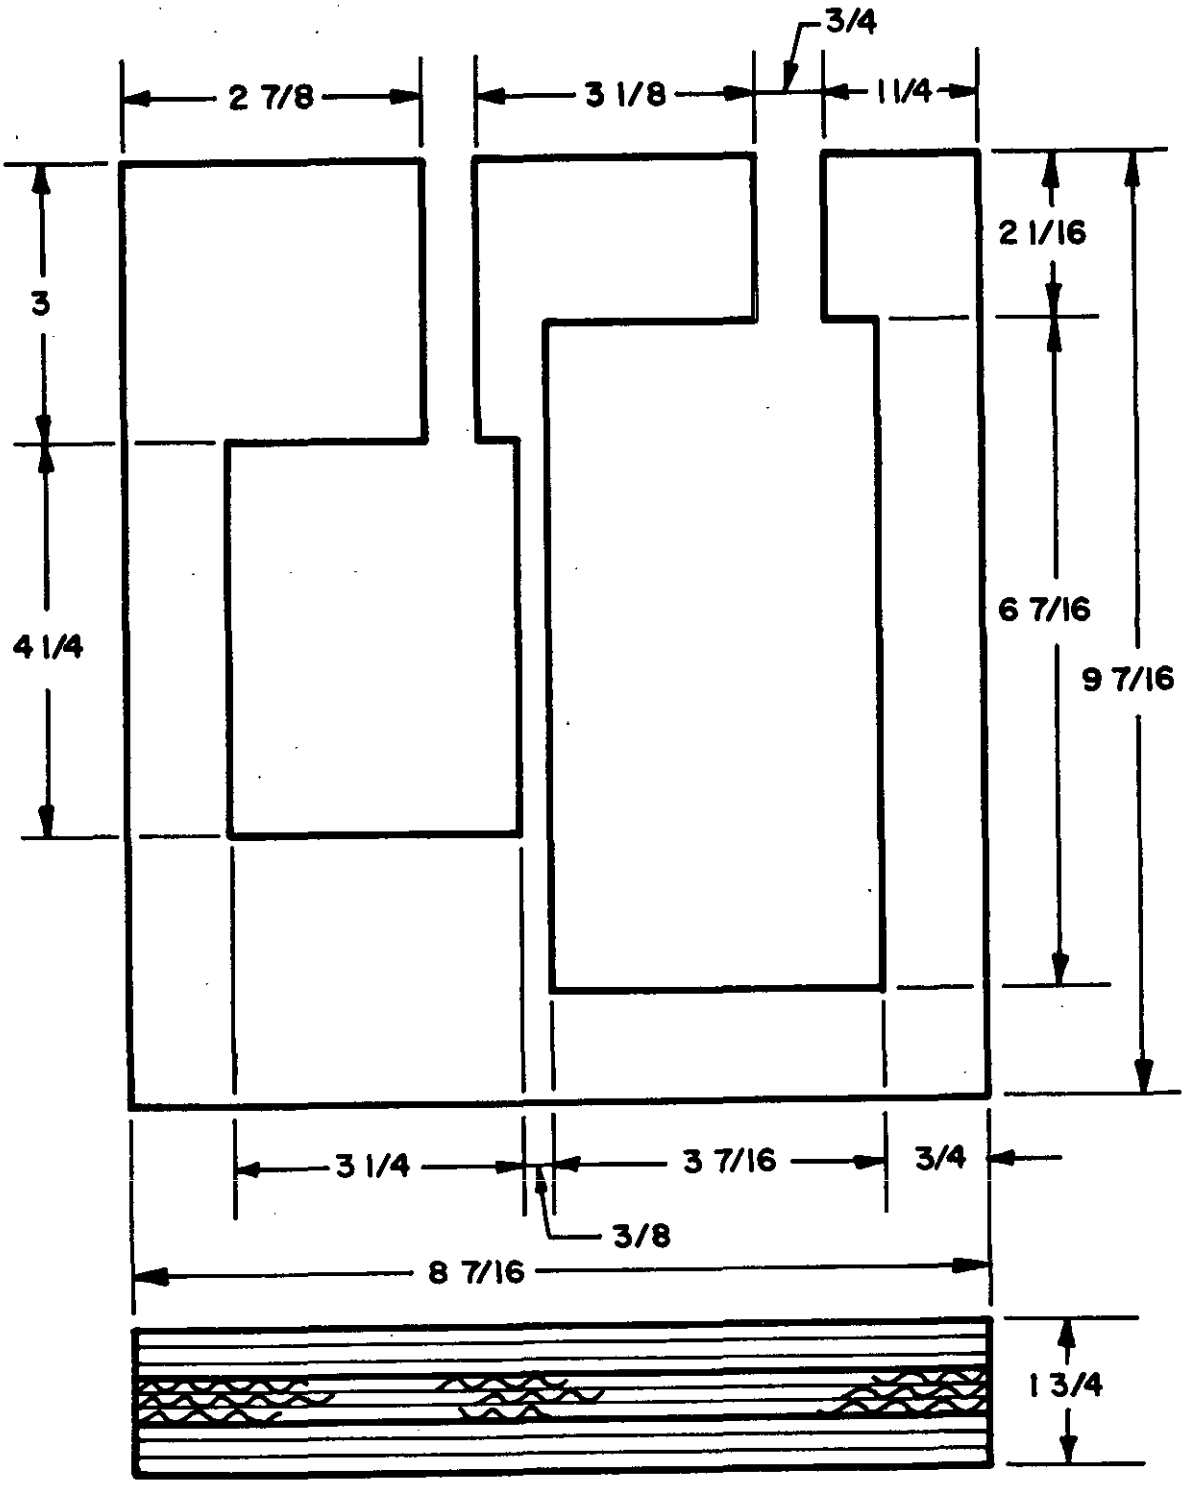


FIGURE 22

INSERT

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:36Z
Check the source to verify that this is the current version before use.

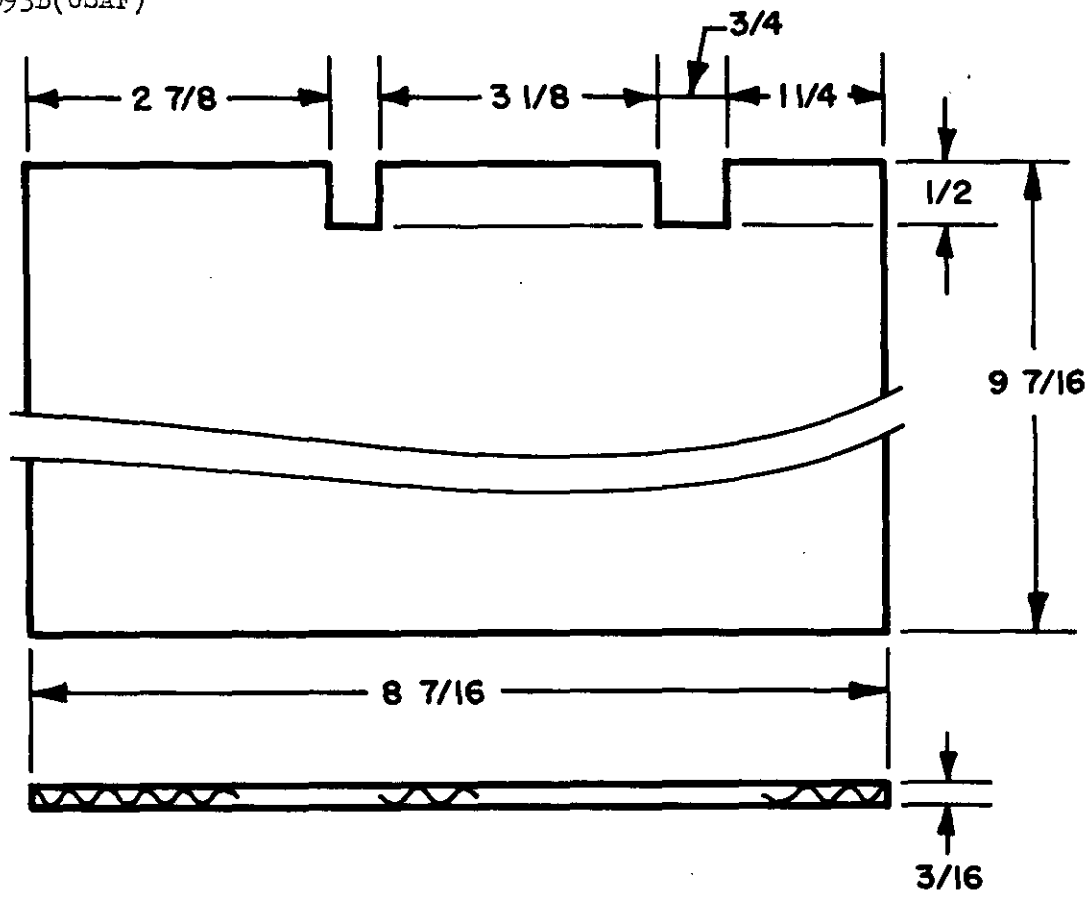

NOTES

1. Radio Receiver & Components to be packed as indicated in Fig. 39.

2. Pads to be fabricated from double faced fiberboard conforming to PPP-F-320.


3. Insert (Fig. 40) to be fabricated from PPP-B-640 material, laminated & die cut.

4. Laminate bottom pad (item 2, Fig. 39) to die cut insert (item 3, Fig. 39).

5. Container to be a PPP-B-636 box, Style RSC, I.D. 9½ x 8½ x 3.

FIGURE 23
CENTER PAD

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:36Z
Check the source to verify that this is the current version before use.

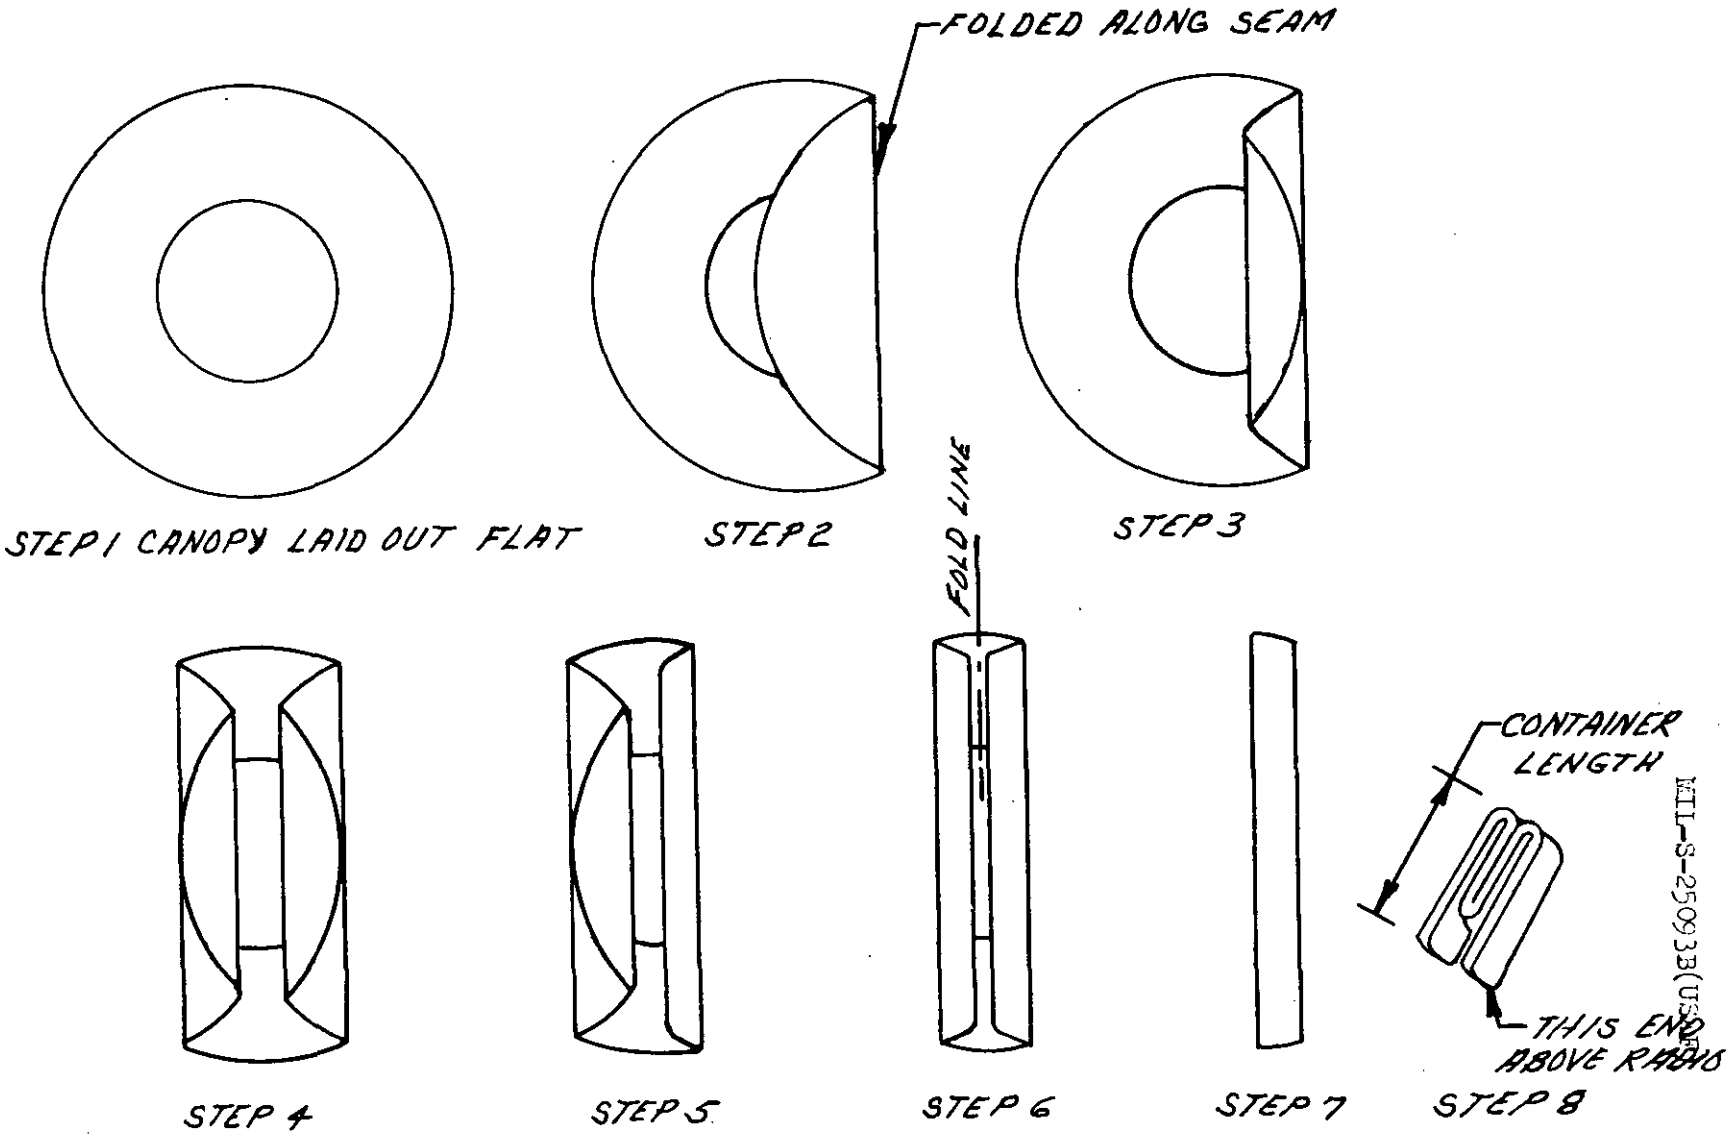

FOLDING PROCEDURE OF LIFE RAFT CANOPY

FIGURE 24
FOLDING PROCEDURE FOR LIFE RAFT CANOPY

MIL-S-25033B(USAF)

Source: https://assist.dla.mil -- Downloaded: 20260-20T03:36Z
Check the source to verify that this is the current version before use.

container in such a way that the abrasive side of the card cannot come in contact with the matches.

3.6 Identification of product. - Equipment, assemblies, and parts shall be marked for identification in accordance with MIL-STD-130. The following special markings shall also be added to the exterior of each container:

This container is No. ___*___ of five containers.

* Applicable data shall be inserted by the contractor.

3.7 Workmanship. - The kit shall be constructed in a thoroughly workmanlike manner. The finished items shall be clean and free from any defects that might affect appearance or functionability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of tests. - The inspection and testing of the kit shall be classified as acceptance tests.

4.3 Acceptance tests. - Acceptance tests shall consist of the individual tests.

4.3.1 Individual tests. - Each sea rescue kit shall be subjected to test specified under 4.4.

4.4 Test methods

4.4.1 Examination of product. - Each sea rescue kit shall be inspected to determine compliance with the requirements specified herein with respect to assembly, materials, workmanship, and markings.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging

5.1.1 Level A. - Assembled sea rescue kit containers 1, 3, and 5 shall be preserved, Method 1A8, and containers 2 and 4 shall be preserved Method II in accordance with Specification MIL-P-116.

Source: https://assist.dla.mil -- Downloaded: 202610-20T03:36Z
Check the source to verify that this is the currentversion before use.

Each container, when preserved, shall be packed in a container conforming to Specification PPP-B-636. Containers shall be closed and sealed in accordance with the specification and appendix thereto.

5.1.2 Level C. - Sea rescue kits shall be preserved and packaged in accordance with the manufacturer's commercial practice.

5.2 Packing

5.2.1 Packing shall be Levels A, B, or C, as specified (See 6.2). Shipping containers, insofar as practical, shall be of uniform shape and size, of minimum cube and tare consistent with the protection required, and contain identical quantities.

5.2.1.1 Level A. - Sea rescue kits preserved and packaged in accordance with paragraph 5.1.1 and 5.1.2 shall be packed in overseas type containers conforming to Specification PPP-B-601.

5.2.1.2 Level B. - Same as paragraph 5.2.1.1, except containers shall be domestic type and closure shall be in accordance with the requirements for domestic containers.

5.2.1.3 Level C. - Packages which require overpacking for acceptance by the carrier shall be packed in exterior type shipping containers in a manner that will ensure safe transportation at the lowest rate to the point of delivery. Containers shall meet Consolidated Freight Classification Rules or regulations of other common carriers as applicable to the mode of transportation.

5.3 Physical protection. - Cushioning, blocking, and bolting, as required, shall be in accordance with Specification JAN-P-100, except that for domestic shipments, waterproofing requirements for cushioning materials and containers shall be waived. Drop test of JAN-P-100 shall be waived when preservation, packaging, and packing of the item are for immediate use or when drop tests of MIL-P-116 are applicable.

5.4 Marking. - Interior and exterior containers shall be marked in accordance with MIL-STD-129. The nomenclature shall be as follows:

Sea Rescue Kit, Type MA-1, or
Sea Rescue Kit, Type MA-2

5.4.1 Additional marking

5.4.1.2 Each container shall be marked as follows:

This container is No. ___*___ of five containers.

* Applicable data shall be entered by the contractor.

5.4.2 In addition to the MIL-STD-129 marking requirement of paragraph 5.4, for Air Force procurements, regardless of the mode(s) of

Source: https://assist.dla.mil -- Downloaded: 202640-20T03:36Z
Check the source to verify that this is the current version before use.

transportation, the following shall be complied with:

5.4.2.1 Interior and exterior containers 1 and 5, containing life rafts and CO_2 cylinders, shall be marked in accordance with ICC Regulation #13. In addition, if air shipment by military aircraft is required, containers shall be marked in accordance with AFM 71-4.

6. NOTES

6.1 Intended use. - The sea rescue kits covered by this specification are intended to be dropped from aircraft at speeds from 120 to 190 knots at 200 to 300-foot altitudes to survivors at sea for use as emergency equipment.

6.2 Ordering data. - Procurement documents should specify the following:

a. Level of packaging and packing desired.

b. Which items should be Government furnished, if any.

c. Determine whether or not hazardous components are included (See AF Manual 67-1, Vol I).

d. Type desired (1.2).

PATENT NOTICE: When Government drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any invention that may be related thereto.

Preparing Activity
WRAMA/WRNSS

GPO 801158-2

Source: https://assist.dla.mil -- Downloaded: 202640-20T03:36Z
Check the source to verify that this is the currentversion before use.