INCH-POUND


MIL-DTL-23971/9B
3 May 2012
SUPERSEDING
MIL-DTL-23971/9A
23 April 2002

DETAIL SPECIFICATION SHEET

POWER DIVIDER, N-WAY, 0 DEGREES, SMA CONNECTORS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the power divider described herein shall consist of this specification sheet and MIL-DTL-23971.

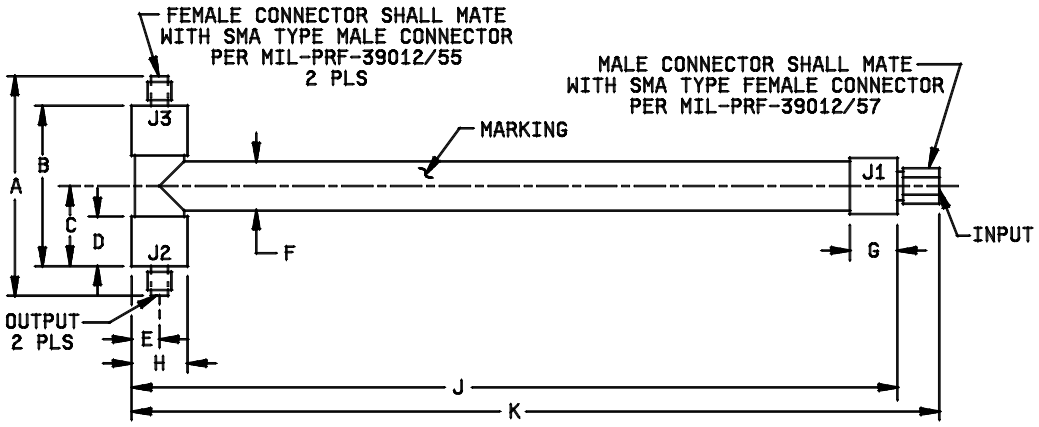

	Dimensions			
	Inches		Millimeters	
	Max	Min	Max	Min
A	2.00	1.88	50.8	47.8
B	1.43	1.41	36.3	35.8
C	.98	.96	24.9	24.4
D	.45	.43	11.4	10.9
E	.255	.245	6.5	6.2
F	4.45 dia	4.25 dia	113.0 dia	108.0 dia
G	.43	.41	10.9	10.4
H	.51 dia	.49 dia	13.0 dia	12.4 dia
J	6.78	6.77	172.2	172.0
K	7.20	7.08	182.9	179.8

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Dimensions and configuration, 2-way dash number 01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:35Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figure 1.

Body: O-ring seal.

Ambient temperature:	operating	storage
	-40° to +105°C	-65° to +125°C

Electrical performance characteristics:

Impedance: 50 ohms.

Frequency range: 0.5 to 1.5 GHz.

Average coupling: 3 ±.25 dB. 1/

VSWR: 1.15:1 maximum. 1/

Insertion loss: 0.05 dB maximum.

Isolation: 6.0 dB minimum.

Phase balance: ± 6.0 degrees maximum.

Amplitude balance: ±1.0 dB maximum.

Power level: 150 W average, 2 kW peak.

Environmental tests: In accordance with MIL-DTL-23971 except:

Thermal shock: In accordance with method 107 of MIL-STD-202, test condition B.

Shock: In accordance with method 213 of MIL-STD-202, test condition G, except peak value of 100G.

Salt atmosphere: In accordance with method 101 of MIL-STD-202, test condition A.

1/ Measured from 0.960 to 1.215 GHz.

Part number: M23971/9-01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:35Z
Check the source to verify that this is the current version before use.

Referenced documents: In addition to MIL-DTL-23971, this document references the following
MIL-PRF-39012/55
MIL-PRF-39012/57
MIL-STD-202

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5985-2012-011)

Review activities:
Navy - AS, MC, OS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:35Z
Check the source to verify that this is the current version before use.