MIL-T-13317F

17 February 1976
SUPERSEDING
MIL-T-13317E
30 September 1969

MILITARY SPECIFICATION

TOOL KIT, OFFICE MACHINES, REPAIR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type tool kit for repair of office machines, complete with carrying case.

2. APPLICABLE DOCUMENTS

* 2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

H-B-681	-	Brushes, Typewriter
O-F-506	-	Flux, Soldering; Paste and Liquid
NN-H-106	-	Handles; Wood, Miscellaneous (For) Tools
QQ-S-571	-	Solder; Tin Alloy; Lead-Tin Alloy; and Lead Alloy
SS-S-736	-	Stones, Sharpening
GGG-B-60	-	Bag, Tool Satchel
GGG-F-331	-	File, Hand (Swiss Pattern)
GGG-H-86	-	Hammers, Hand (Forged Steel Head)
GGG-K-275	-	Key, Socket Head Screw and Key Sets Socket Head (Wrench, Hexagon, Spline and Square)
GGG-N-71	-	Nail Set
GGG-N-350	-	Nippers and Pincers
GGG-P-468	-	Pliers, Diagonal Cutting
GGG-P-471	-	Pliers
GGG-P-831	-	Punches; Center, Coopers', Drive Pin, Aligning, and Prick
GGG-R-791	-	Rules, Measuring

FSC 5180

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.

GGG-S-121 - Screwdriver and Screw Starter, Hand
GGG-T-570 - Torch Kit, Soldering (Propane Gas)
GGG-W-631 - Wrenches, Adjustable; Open-End, Auto and Monkey
GGG-W-636 - Wrenches, (Box, Open End, and Combination)
PPP-B-585 - Boxes, Wood, Wirebound
PPP-B-601 - Boxes, Wood, Cleated-Plywood
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner
PPP-B-636 - Boxes, Shipping, Fiberboard
PPP-P-40 - Packaging and Packing of Hand Tools
PPP-T-60 - Tape: Packaging, Waterproof

MILITARY

MIL-L-10547 - Liners, Case and Sheet, Overwrap; Water-Vaporproof or Waterproof, Flexible

STANDARD

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply:

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N. W., Washington, DC 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Materials. Materials not definitely specified shall conform to the manufacturers current commercial practice.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.

3.2 Details of components. The tool kit shall consist of carrying case and a group of tools as listed in table I.

3.3 Tools. Tools specified in table I shall be standard catalog products except for such deviations from manufacturer's standards as may be required by details in this specification. Where the term "or equal" is used, it shall be interpreted to mean that all the established functional requirements shall be met. Items not followed by the term "or equal" shall be confined to the manufacturer specified since tools fabricated by other manufacturers are not suitable for the purpose for which the tool is intended. The illustrations appearing on figures 1 thru 19 are furnished for information only and are illustrative of the same item number in table I.

TABLE I. Hand tools

Item number	Components	Quantity	For ref. see fig.
* 1	Bender, calculating machine repair, dial clear adjusting, Olivetti Corp. of America, No. 250, or equal.	1	1
2	See 6.3		
3	See 6.3		
4	Bender, calculating machine repair, "Monroe" carrying finger, Monroe Calculating Machine Co., Inc., No. 94, or equal (for M-A models).	1	1
5	Bender, calculating machine repair, "Monroe" rack arm, Monroe Calculating Machine Co., Inc., No. 101, or equal.	1	1
6	Bender, calculating machine repair, "Monroe" selecting bail lug, Monroe Calculating Machine Co., Inc., No. 91, or equal.	1	1
7	Bender, heavy duty, Paul A. Kegevic Co.'s "Keg-Master" 5KM, or equal.	1	2
* 8	Bender, typewriter repair, "Royal" type bar, 7-1/2 inch length, Royal Typewriter Corp., No. S-6, or equal.	1	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.

TABLE I. Hand tools (cont'd)

Item number	Components	Quantity	For ref. see fig.
* 9	Bender, Bichrome, Royal, Smith-Corona, and Olivetti, Paul A. Kegevic Co.'s "Keg-Master" IKM, or equal.	1	2
* 10	Bender, typewriter repair, back space, Olivetti, Royal and Universal key lever bender, Paul A. Kegevic Co.'s "Keg-Master" 2KM, or equal.	1	2
11	See 6.3		
12	Brush, typewriter 11-3/4 inch O/a lg., 1-1/2 inch brush length, style P, class 1 of H-B-681.	1	3
13	See 6.3		
* 14	Deleted.		
15	Brush, typewriter, type cleaning, tooth brush type, style T, class optional of H-B-681.	1	3
* 16	Oiler, hand, Ames Supply Co., No. 174 valvespout oiler with 5-3/4 inch spout, or equal.	1	3
17	See 6.3		
* 18	Crank, operating, calculating machine Olivetti Corp. of America, No. M-273, or equal.	1	3
* 19	Dial-assembly-fixture, calculating machine repair, Olivetti Corp. of America, No. 2853-F, or equal.	1	3
20	File, swiss pattern, pillar, cut No. 0, 6 inches length, type XI, class 3 of GGG-F-331.	1	4
21	File, swiss pattern, pillar, extra narrow, cut No. 0, 6 inches length, type XI, class 1, of GGG-F-331.	1	4

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.

TABLE I. Hand tools (cont'd)

Item number	Components	Quantity	For ref. see fig.
* 22	File, swiss pattern, round taper, cut No. 0, 6 inches length, type XIII, class 2 of GGG-F-331.	1	4
* 23	File, swiss pattern, square, cut No. 0, 6 inches length, type XV of GGG-F-331.	1	4
* 24	File, swiss pattern, warding, cut No. 0, 4 inches length, type XVII, class 2 of GGG-F-331.	1	4
25	Flux, soldering, paste, 2-ounce can, conforming to O-F-506, type I, form optional.	1	4
26	Hammer, riveting, weight 4 ounces, type II, class 2 of GGG-H-86.	1	4
27	Handle, file and tool, small, largest diameter of handle (grip) 1 inch, type II, size 1 of NN-H-106.	1	4
28	See 6.3		
29	Nippers, end cutting, compound lever type, detachable flat cutters, 5-1/2 inch nominal o/a length, with one set type cutting jaws and one set mauling jaws, type I, class 1, style C of GGG-N-350.	1	5
* 30	Pick, typewriter repair, type bar, segment, Royal Typewriter Corp. No. S-144, or equal.	1	5
* 31	Keyset, socket head screw, type II, class 1, sizes 1/16, 5/64, 3/32, 1/8, 5/32 and 3/16 inches of GGG-K-275.	1 kit	5
32	Pliers, needle nose, long chain, with side cutter, 6 inches length, type XI class 1, style A of GGG-P-471.	1	5

Source: https://assist.dla.mil -- Downloaded: 202610-18T00:24Z
Check the source to verify that this is the current version before use.

TABLE I. Hand tools (cont'd)

Item number	Components	Quantity	For ref. see fig.
* 33	Pliers, side cutting, parallel jaws, 6-1/2 inches length, overall, type XIV, class 1 of GGG-P-471.	1	5
* 34	Pliers, typewriter repair, peening, 6-3/4 inches length, Ames Supply Co.'s new style with thin jaws, No. 313, or equal.	1	5
* 35	Pliers, typewriter repair, three prong, 6-13/16 inches length, Ames Supply Co.'s No. 2, or equal.	1	6
* 36	Pliers, with smooth unscored jaw gripping surfaces, 8 inches length, overall, type XV, class 2 of GGG-P-471.	1	6
37	Punch, center, octagon or round knurled, diameter of stock 5/16 inch, 4 inch length, type II, class A, size 4 of GGG-P-831.	1	6
* 38	Punch, typewriter repair, pin driving, diameter of point 1/16 inch, 4 inch length, type VIII, class A, size 1, style 1, of GGG-P-831.	1	6
* 39	Rod, calculating machine repair, follow-up dial, Olivetti Corp. of America, No. 92384, or equal.	1	6
40	Rod, calculating machine repair, "Monroe" follow-up, sensing lever, Monroe Co.'s No. 74, or equal.	1	6
* 41	Rod, calculating machine repair, follow-up, lower dial, Olivetti Corp. of America, No. 92391, or equal.	1	6
42	Roll, tool, canvas, typewriter mechanics, empty, Ames Supply Co.'s No. T-141, or equal.	1	6
43	Rule, book 6-inch length, 3/16 width, 3/64 inch thickness, 1/64 and 1/32 inch graduated edges, type IX of GGG-R-791, except hook may be omitted.	1	6

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.

TABLE I. Hand tools (cont'd)

Item number	Components	Quantity	For ref. see fig.
* 44	Screwdriver, 1/4-inch tip width, length of blade 10 inches, type I, class 1, design A of GGG-S-121.	1	7
* 45	Screwdriver, 3/16-inch tip width, length of blade 8 inches, type I, class 1, design A of GGG-S-121.	1	7
* 46	Screwdriver, 9/64-inch tip width, length of blade 12 inches, type I, class 1, design A of GGG-S-121.	1	7
47	See 6.3		
* 48	Screwdriver, 9/64-inch tip width, length of blade 3 inches, type I, class 1, design A of GGG-S-121.	1	7
* 49	Screwdriver for Phillip's Head screw, 3 inch blade, No. 1 screws, type VI, class 1 of GGG-S-121.	1	7
50	Gauge, pick-up and trip, Ames Supply Co.'s No. 210 or equal.	1	7
51	See 6.3		
52	Screwdriver, adjusting, for Royal Segment Ballrace, 3-1/8 inch length, outside diameter 3/8 inch, Paul A, Kegevic Co.'s "Keg-Master" 3 KM, or equal.	1	8
* 53	Screw-starter, split end, plastic handle, 1/8 by 8 inch length, Ames Supply Co.'s No. 84, or equal.	1	8
54	Nail set, diameter of point 1/16 inch, 4 inch length, conforming to GGG-N-71.	1	8
55	See 6.3		
* 56	Solder, tin-lead, wire, solid, diameter 1/16 inch, 1/4 pound, composition SN 50, of QQ-S-571.	1	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.

TABLE I. Hand tools (cont'd)

Item Number	Components	Quantity	For ref. see fig.
57	See 6.3		
* 58	Stone, sharpening, 3-1/2 x 1 x 13/16 inch, combination fine and coarse grits, of SS-S-736, type II, class B, style 1.	1	9
59	Tester, circuit, neon-type, 110 to 550 volts, Graybar Electric Co.'s Inc., "Test-O-Lite", or equal.	1	9
* 60	Timing-wire, with hand knob, calculating machine repair, Olivetti Corp. of America, No. 2866-M, or equal, for use with dial assembly fixtures (41-D-119-770)	1	9
* 21	Torch kit, soldering, propane gas, GGG-T-570.	1	Not shown
62	See 6.3		
63	Gage, type-soldering, typewriter, portable and electric, for one type to a complete set, for use without removing type bar, Paul A. Kegevic Co.'s "Keg-Master" No. 50 K1, or equal.	1	9
64	Wrench, adjustable, crescent type, jaw opening 3/4 inch, 6 inches overall, type I, class 1 of GGG-W-631.	1	9
65	Wrench, Calculating machine repair, "Monroe" carriage lock out, Monroe Calculating Machine Co., Inc., No. 123, or equal.	1	9
66	Wrench, calculating machine repair, "Monroe" dial shaft bushing, 5/16 inch, Monroe Calculating Machine Co., Inc., No. 112, or equal.	1	10
67	Wrench, calculating machine repair, "Monroe" open end, 1/4 x 1/4 inch, Monroe Calculating Machine Co., Inc., No. 92, or equal.	1	10

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.

TABLE I. Hand tools (cont'd)

Item number	Components	Quantity	For ref. see fig.
68	Wrench calculating machine repair, "Monroe" shaft roller arm adjusting, 1/4 x 5/16 inch, Monroe Calculating Machine Co.'s Inc., No. 113, or equal.	1	10
69	See 6.3		
* 70	Wrench, open end, for motion adjusting nut, two 3/8 inch openings, 3-1/2 inches long, Olivetti Corp. of America, No. TL-250-3-21 or equal.	1	10
71-76	See 6.3.		
77	Wrench, typewriter repair, open end, 1/4 inch straight, 5/16 inch offset, machined openings, 5-1/2 inches length, Paul A. Kegevic Co.'s "Keg-Master" No. 51 KM, or equal.	1	10
78	Wrench, typewriter repair, open end, 5/16 inch straight, 1/4 inch offset, machined openings, 5-1/2 inches length, Paul A. Kegevic Co.'s "Keg-Master" No. 52 KM, or equal.	1	10
79	Wrench, typewriter repair, open end, 7/16 inch straight, 3/8 inch offset, machined openings, 5-1/2 inches length, Paul A. Kegevic Co.'s "Keg-Master" No. 53 KM, or equal.	1	10
80	Wrench, typewriter repair, open end, 3/8 inch straight, 7/16 inch offset, machined openings, 5-1/2 inches length, Paul A. Kegevic Co.'s "Keg-Master" No. 54 KM, or equal.	1	10
81	Wrench, typewriter repair, open end, 9/64 x 7/32 inch machined openings, 4-1/2 inches length. Paul A. Kegevic Co.'s "Keg-Master" No. 55 KM, or equal.	1	11
82	Wrench, typewriter repair, open end, 3/16 x 9/32 inch, machined openings, 5 inches length, Paul A. Kegevic Co.'s "Keg-Master", No. 56 KM, or equal.	1	11

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.

TABLE I. Hand tools (cont'd)

Item number	Components	Quantity	For ref. see fig.
83	See 6.3		
84	See 6.3		
85	Wrench, open end, fixed, for adjusting type action eccentric, 3/16 by 1/4 inch machined openings, 5-11/16 inch length, Ames Supply Co.'s No. 36 N, or equal.	1	11
* 86	Wrenches, open end, fixed, single offset double head type, Smith-Corona, for motion adjusting, one wrench 1/2 inch open ends, 7-1/4 inches long. One wrench 3/8 inch open ends, 6-3/4 inches long.	1 ea.	11
87	Wrenches, typewriter repair, Royal Motion, one wrench 7/16 inch open ends, 5-3/16 inches long and one wrench 13/16 inch open ends, 5-1/4 inches long, Ames Supply Co.'s No. 33, 34, or equal.	1 ea	11
88	Wrench, typewriter repair, Smith Corona escapement, 1/4 inch offset and 9/32 inch offset, machined openings, Paul A. Kegevic Co.'s "Keg-Master" No. 62 KM, or equal.	1	11
89	Wrench, typewriter repair, open end, 5/16 inch offset and 7/16 inch offset, machined openings, Paul A. Kegevic Co.'s "Keg-Master" No. 63 KM, or equal.	1	11
90	Wrench, typewriter repair, Royal type aligning and Smith-Corona sublever bender, Paul A. Kegevic Co.'s "Keg-Master" No. 4 KM, or equal.	1	11
91	Wrench, open end, fixed, double head type, 15 degree angle of head, 5/32 and 3/16 inch wrench openings, 3/32 inch head thickness, 2-1/2 inches minimum o/a length, type IV of GGG-W-636.	1	12

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.

TABLE I. Hand tools (cont'd)

Item number	Component	Quantity	For ref. see fig.
92	Wrench, typewriter repair, socket, hollow shaft 5/32 inch, Remington Rand No. ST 40015, or equal.	1	12
93	Wrench, typewriter repair, socket, hollow shaft, 3/16 inch, Remington Rand No. ST 40016, or equal.	1	12
94	Wrench, typewriter repair, "Remington" segment shift stop screw nut, front, 5/16 inch, Remington Rand No. ST 40017, or equal.	1	12
95	Wrench, typewriter repair, socket, Smith Corona stop adjusting screwnut, Ames Supply Co.'s No. 30-KM, or equal.	1	12
* 96	Wrench, typewriter repair, offset box 1/4 inch, Olivetti, segment shift motion, Ames Supply Co.'s No. 32 KM, or equal.	1	12
97	Wrench, typewriter repair, offset box, 7/32-inch, Underwood, segment shift, Ames Supply Co.'s No. 31 KM, or equal.	1	12
* 98	Wrench, typewriter repair, "Olivetti" escapement, with two 1/8 inch openings, 4-1/8 inch long, Ames Supply Co. No. 28, or equal.	1	12
99	Wrench, typewriter repair, Royal motion locknut, 5/16 inch openings, 3-7/8 inch long, Ames Supply Co.'s No. 32, or equal.	1	12
* 100	Wrench, typewriter repair, Underwood segment lock adjustment, 5/16 inch open end toggle, 6 inches long, Olivetti Corp. of America, TL-250-10-1, or equal.	1	12
* 101	Wrench, typewriter repair, Underwood line space tarchet detent adjusting, 11/32 inch openings, Olivetti Corp. of America, No. TL-250-3-17, or equal.	1	12

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.

TABLE I. Hand tools (cont'd)

Item number	Components	Quantity	For ref. see fig.
102	Pliers, side aligning, for offsetting type bar to side align type, 7-1/8 inches long, Ames Supply Co.'s No. 10, or equal.	1	13
* 103	Wrenches, open end, 1/4 inch and 5/16 inch openings, Olivetti Corp. of America, No. TL-250-3-12, or equal.	2	13
104	Wrench, open end, fixed, single head type, 5/8 inch opening, Remington Rand No. ST 40146, or equal.	1	13
105	Wrench, open end, 5/8 inch offset opening, Remington Rand No. ST40158, or equal.	1	13
106	See 6.3		
* 107	Wrench, disc tightening, Royal Typewriter Corp.'s No. IES-152, or equal.	1	13
* 108	Screwdriver-and-split-nut adjuster, typewriter repair, "Royal" segment lock, Royal Typewriter Corp. Nos. 2980-90100 (screwdriver), and 2982-11700 (split nut adjuster), or equal.	1	14
* 109	Wrench, clutch drive shaft, combination aligning tool, Royal Typewriter Corp.'s No. S383, or equal.	1	14
* 110	Crank, hand knob, electric calculator service, Singer Co., No. T-18324, or equal.	1	14
* 111	Bag, tool, satchel; leather case with top-opening compartment, flap covered end opening, with three compartmented small part trays and covers, overall dimensions: 15-1/2 inches long, 5-1/4 inches wide, 11-3/8 inches high, GGG-B-60.	1	14
112	Block, typewriter repair, with V-groove and holes for driving pins, hardened steel, 2-1/2 inches square, 7/8 inch thick, Ames Supply Co.'s No. 98, or equal.	1	15

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.

TABLE I. Hand tools (cont'd)

Item number	Components	Quantity	For ref. see fig.
* 113	Drawband hook, 12 inch, Royal Typewriter Corp.'s No. PS-30, except 12 inches long, or equal.	1	15
* 114	Spring hook set, Ames Supply Co.'s No. 91, or equal.	1	15
* 115	Wrench, motor, governor, Olivetti Corp. of America, TL-250-1-3, or equal.	1	15
* 116	Wrench, type aligning, T-handle, Olivetti Corp.'s No. TL-250-1-9, or equal.	1	Not shown
* 117	Wrench, friction clutch, 5/8 inch, Olivetti Corp.'s No. TL-250-2-4, or equal.	1	16
* 118	Wrench, friction clutch, 7/8 inch, Olivetti Corp.'s No. TL-250-2-5, or equal.	1	16
* 119	Wrench, spline, 1/16 inch, 6 inches long, Olivetti Corp.'s No. TL-250-13-2, or equal.	1	16
* 120	Wrench, motion, for electric typewriter, Olivetti Corp.'s No. ST-563, or equal.	1	17
* 121	Wrenches, allen, hex driver, kit, Ames Supply Co.'s No. 850, or equal.	1 set	17
* 122	Bender, universal assembly, T-handle, 1/4 inch shank, .068 inch adjustment slot, Olivetti Corp.'s No. M-396, or equal.	1	17
* 123	Loader, typewriter repair, ball and pinion, Royal Typewriter Corp.'s No. PS 142, or equal.	1	17
* 124	Pliers, diagonal cutting, regular, 6 inches nominal size, type I, class 1 of GGG-P-468.	1	18

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.

TABLE I. Hand tools (cont'd)

Item number	Components	Quantity	For ref. see fig.
125	Pliers, typewriter repair, ball peening, Ames Supply Co.'s No. 15. or equal.	1	18
126	Punch, drive pin, straight type, 1/8 inch point diameter, 3-1/2 inches point length, 8 inches overall length, type VIII, class B, size 1 of GGG-P-831.	1	18
127	Punch, drive pin, straight type, 3/16 inch point diameter, 3-1/2 inches point length, 8 inches overall length, type VIII, class B, size 2 of GGG-P-831.	1	18
* 128	Screwdriver, offset, opposite offset, opposite ends, each offset tipped, 1/4 inch wide tip, 4-1/4 inch overall length, type IV, class 1 of GGG-S-121.	1	18
129	Screwdriver, for phillip's head screw, 4 inch blade, No. 2 screws, type VI, class 1 of GGG-S-121.	1	18
130	Hook, spring, medium, IBM No. 9900059, or equal.	1	18
131	Spring clip pusher, 8 inches overall length, Ames Supply Co.'s No. 14-KM, or equal.	1	18
132	Forceps, hemostatic, straight, Halsted, 5 inch, with finger rings, ratchet and pawl, Defense Personnel Support Center drawing number 20251.	1	19
* 133	Bottle, plastic, screw cap, 2-inch widemouth opening; Western Electric Co., P/N R3298, or equal.	9	19
* 134	Key set, socket head screw, with case or roll, consisting of one each of the following sizes: .035, 0.050, 1/16, 5/64, 3/32, 1/8, 5/32, 3/16, 7/32, 1/4 inch, type I, class 1 of GGG-K-275.	1 set	19
* 135	Screwdriver and wrench assembly, hex socket wrench type, 1/8 inch screwdriver tip width, 7/32 inch socket size, 7 inches overall length, Royal Typewriter Corp.'s No. PS 65, or equal.	1	19
* 136	Screwdriver, 3/16-inch tip width, length of blade 5 inches, type I, class 1, design A of GGG-S-121.	1	Not shown

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.

3.4 Finish.

3.4.1 Tool components. All tool components covered by Government specifications shall be finished as specified therein. All other tools shall be finished in accordance with the manufacturer's current commercial finish.

3.5 Marking for identification.

3.5.1 Tool components. All tools covered by an individual Government specification shall be stamped or marked as specified therein. All other items, including the case, except those too small or of such shape as to make legible marking impractical, shall be stamped or marked with the manufacturer's name or trademark of such known character as to be easily identifiable with said manufacturer, and manufacturer's tool number, all in clearly legible characters of a size optional with the manufacturer.

3.6 Workmanship. All surfaces of the finished tool kit and tools shall be free of burrs, slivers, and rough or sharp edges. Components shall not be broken, cracked, or malformed. The finishes shall be free from imbedded foreign matter and shall show no evidence of peeling, flaking, blistering, or areas of no finish. Finish of case shall be free of cuts, scratches or delamination.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.2.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.2.2 End item inspection. The lot shall be all the tool kits, complete with tool components, offered for inspection at one time. The sample unit for inspection shall be one completely fabricated and assembled tool kit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.

4.2.2.1 Visual examination. Examination shall be made of the end item for defects in table II. The inspection level shall be level II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE II. Classification of defects

Examine	Defect	Classification Major	Classification Minor
Finish (when applicable)	Areas of no finish		X
	Evidence of peeling, flaking or blistering		X
Tools	Not as specified	X	
Case	Cut or scratched, loose, cover material not applied evenly	X	
	Not free of imbedded foreign matter		X
Construction and workmanship	Kit and components not free of burrs, slivers, and rough or sharp edges		X
Tools	Tool component missing	X	
	Not as specified	X	
Case	Not as specified	X	
	Cracked or malformed		X
	Does not close tight or lock	X	
Identification marking (when applicable)	Missing, illegible, incomplete		X

4.2.2.2 Tools not covered by specifications. Tools not covered by specifications shall be examined for compliance with manufacturer's part number specified, using the characteristics of that part number as a guide, quantity requirements and variety specified. Any noncompliance shall be classified a defect. The sample unit for examination shall be one item number of each tool component. Examinations shall be conducted separately for each different tool component. The inspection level applicable to each inspection lot shall be S-4 with an AQL of 4.0, expressed in terms of defects per hundred units.

* 4.2.3 Examination of preparation for delivery. An examination shall be made to determine that preservation, packaging, packing and marking as required by section 5 are complied with.

* 4.2.3.1 Preservation and packaging. Examination of preservation and packaging shall be in accordance with PPP-P-40.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.

* 4.2.3.2 Packing and marking. Examination for defects in packing and marking shall be as indicated in table III. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be all of the containers offered for inspection at one time. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

TABLE III. Examination of packing and marking

Examination	Defect
Markings, exterior and interior	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Any component missing or not as specified. Any component damaged affecting serviceability.
Contents	More or less than required.

4.2.3.3 Inspection of shipping containers. Inspection for defects in closure and strapping of shipping containers shall be in accordance with the appendix of the applicable container specification.

* 5. PACKAGING

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.2).

* 5.1.1 Level A unit preservation - packaging. Tools shall be preserved and unit packaged in accordance with PPP-P-40. Tools not specifically listed therein shall be processed in the manner stipulated for similar tools. Tools requiring only method III unit protection shall be packaged for mechanical protection within the case. Cellulose wadding or nonhygroscopic packing materials shall be used to provide mechanical protection for the tools. The torch, sharpening stone, and circuit tester shall be individually wrapped in single-face corrugated fiberboard and securely taped before they are placed within the case. Small tools may be further packaged within the canvas roll to conserve space. The case shall be closed and locked. The keys shall be attached to handle with not less than 0.057-inch diameter annealed wire. Both the keys and the wire shall be wrapped with tape conforming to PPP-T-60.

* 5.1.2 Level C unit preservation - packaging. Tool kits shall be preserved and packaged to afford adequate protection against corrosion, deterioration and damage during shipment from the supply source to the first receiving activity. The contractor may use his standard practice when it meets these requirements.

* 5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202640-18T00:24Z
Check the source to verify that this is the currentversion before use.

5.2.1 Level A. Four tool kits with cases, preserved and packaged as specified in 5.1, shall be packed upright in a shipping container conforming to overseas type of PPP-B-601; or class 2, style 2 or 4 of PPP-B-621; or class 3, style 1, 2, or 3, type 2 load of PPP-B-585. The case handles and locks shall be protected by use of built-up pads, die-cut pads, or cells made of double-faced corrugated fiberboard having a bursting strength of not less than 275 pounds per square inch (psi). Each shipping container shall be provided with a type I or II, grade C case liner conforming to MIL-L-10547. Each shipping container shall be closed and strapped in accordance with the appendix of the applicable container specification.

5.2.2 Level B. Four tool kits with cases, preserved and packaged as specified in 5.1, shall be packed upright in a fiberboard shipping container conforming to style RSC, type CF, variety SW, or type SF, class domestic of PPP-B-636. The case handles and locks shall be protected by use of built-up pads, die-cut pads, or cells made of double-faced corrugated fiberboard having a bursting strength of not less than 275 psi. Closure shall be in accordance with method II of the appendix of PPP-B-636. When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix thereto.

5.2.3 Level C. Tool kits with cases, preserved and packaged as specified in 5.1, shall be packed in a manner to assure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification or National Motor Freight Classification, as applicable.

5.3 Marking. In addition to any special marking required by the contract, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The tool kit, complete with carrying case, is intended for use by skilled personnel in the repair and maintenance of the following office machines.

(a) Typewriter, nonportable.
(b) Typewriter, nonportable, electrically operated.
(c) Typewriter, portable.
(d) Adding and subtracting machine, listing, electrically operated.
(e) Calculating machine, listing, portable, hand operated.
(f) Calculating machine, listing portable, electrically operated.
(g) Calculating machine, nonlisting, hand operated.
(h) Calculating machine, nonlisting, electrically operated.
(i) Duplicating machine, spirit process, hand operated, 8 by 13.
(j) Duplicating machine, spirit process, electrically operated, 8 by 13.
(k) Duplicating machine, stencil process, hand operated, 8 by 13.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.

(l) Duplicating machine, stencil process, electrically operated, 8 by 13.
(m) Numbering machine, automatic.
(n) Stapling machine, paper, office, level or plunger type, wire staple, preformed, light duty.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Selection of applicable levels of preservation and packaging, and packing (see 5.1 and 5.2).
(c) When weather-resistant fiberboard shipping containers are required for level B pack (see 5.2.2).

* 6.3 Deletion and replacement data. The following item no.'s appearing in the "Hand Tools" listing of the basic revision of this specification have been deleted or replaced in subsequent revisions as indicated below.

Item changes prior to MIL-T-13317F	MIL-T-13317F
Item 2 replaced by item 122	
Item 3 deleted	
Item 11 replaced by item 133	
Item 13 deleted	
Item 14	Deleted
Item 17 replaced by item 111	
Item 28 deleted	
Item 44	Substitution of similar item
Item 47 replaced by item 128	
Item 51 replaced by item 108	
Item 55 deleted	
Item 57 replaced by item 130	
Item 58	Substitution of similar item
Item 62 replaced by item 132	
Item 69 deleted	
Items 71-76 replaced by item 134	
Item 83 deleted	
Item 84 deleted	
Item 86	Quantity - 1 ea.
Item 106 replaced by item 109	
Item 133	Substitution of similar item
Item 136	Added

* 6.4 The margins of this specification have been marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.

TABLE I. Hand tools (Cont'd)

MIL-T-13317F

Custodians:

Army - GL
Air Force - 84

User activity:

Army - AV

Preparing activity:

Army - GL

Project No. 5180-0048

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.

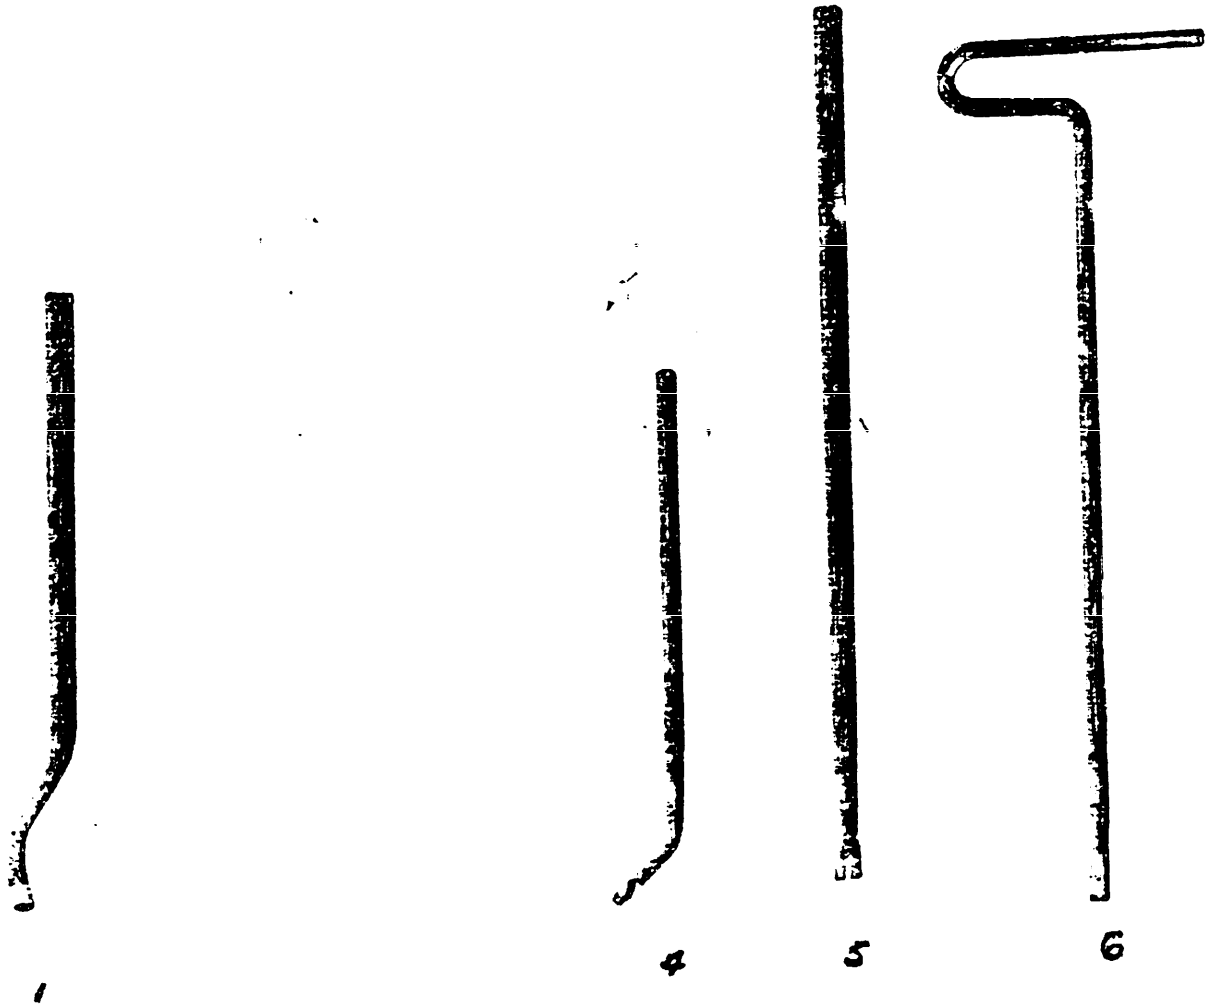


FIG. 1

Source: https://assist.dla.mil -- Downloaded: 202610-18T00:24Z
Check the source to verify that this is the current version before use.

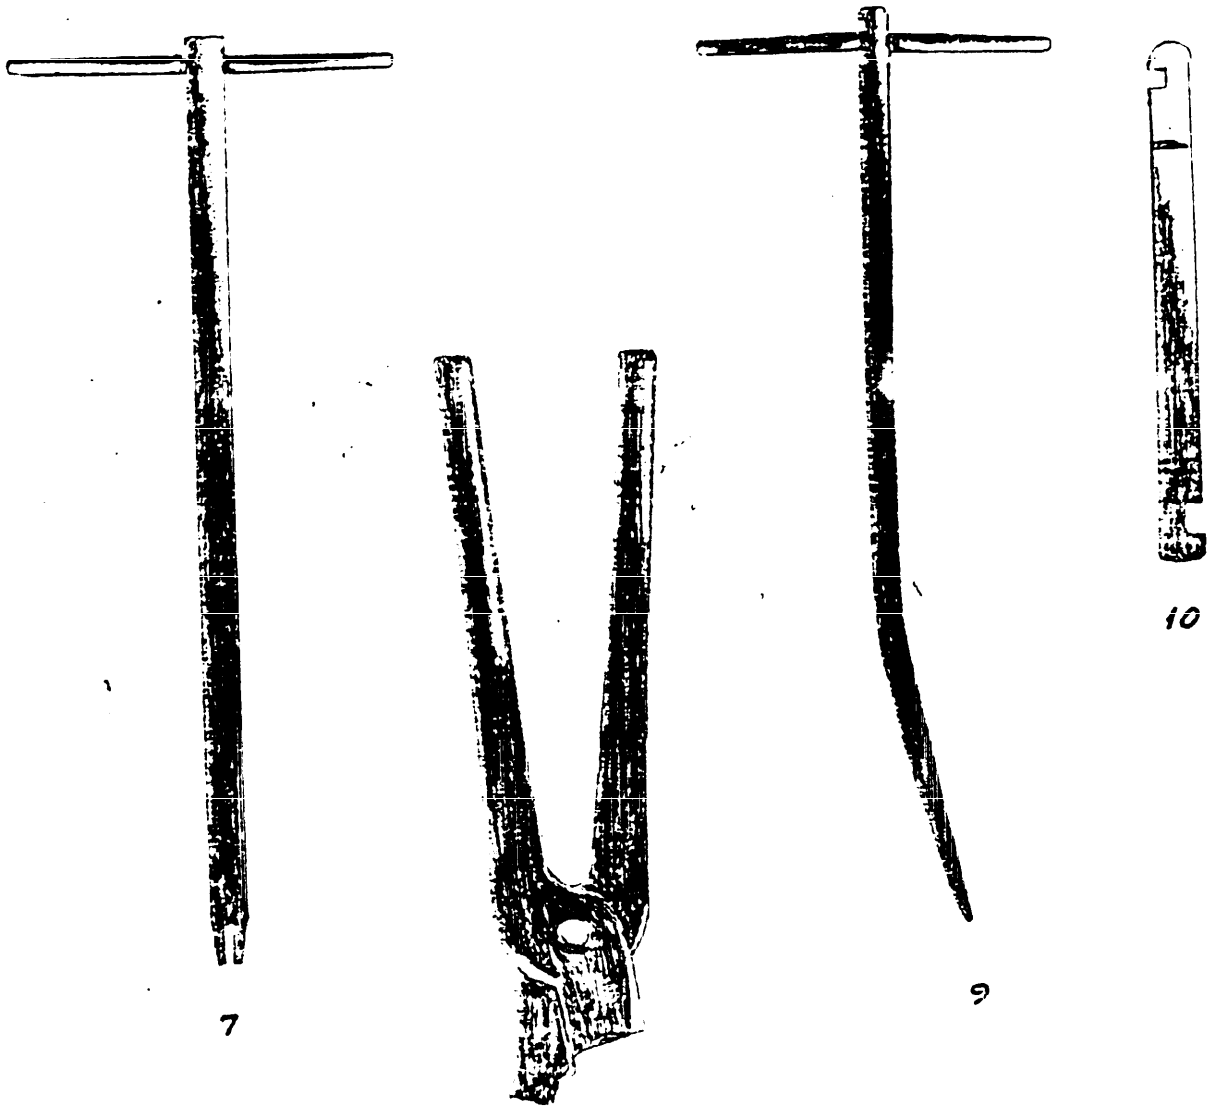


FIG. 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.

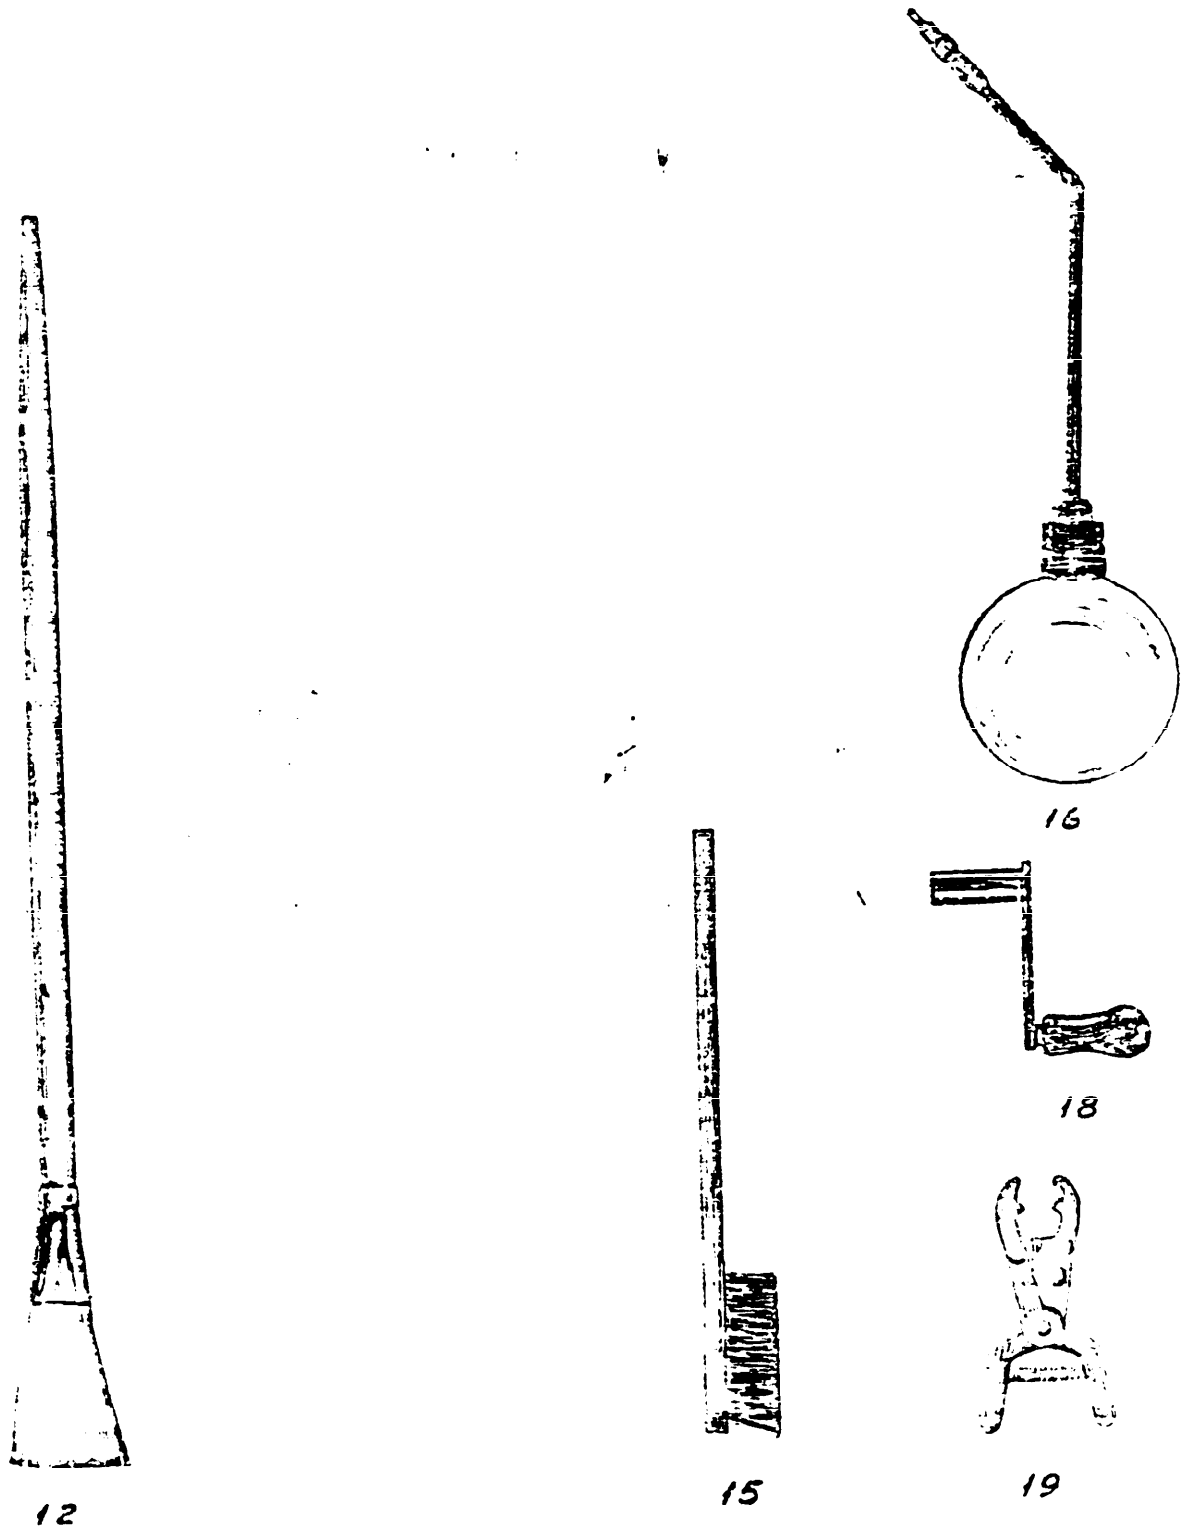


FIG. 3

Source: https://assist.dla.mil -- Downloaded: 20261O-18T00:24Z
Check the source to verify that this is the current version before use.



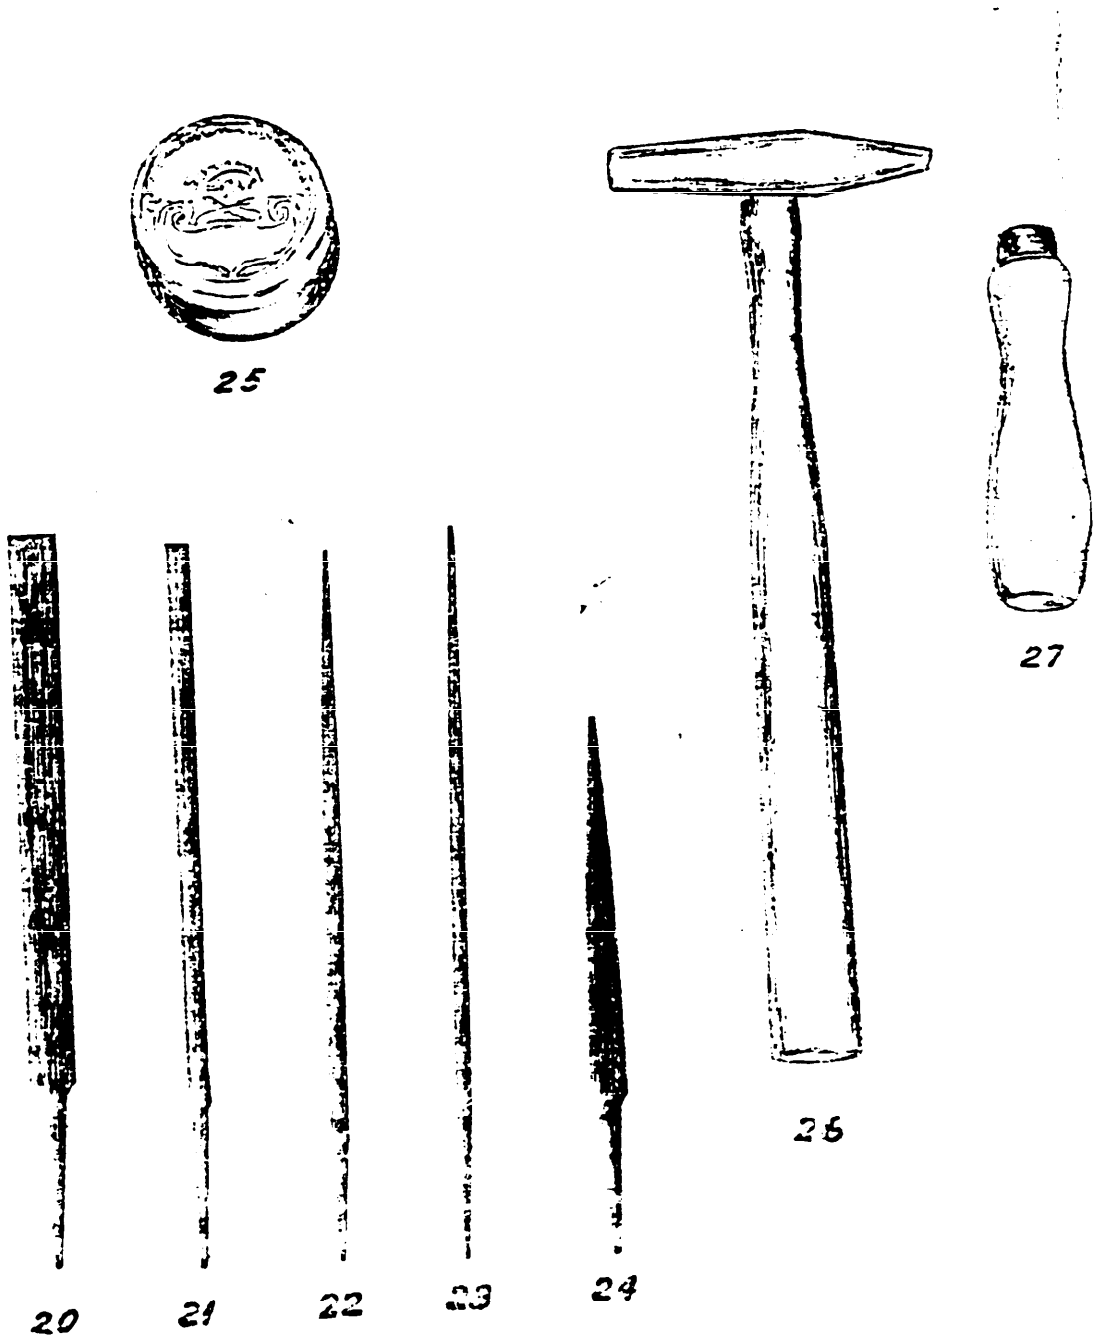


FIG. 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.

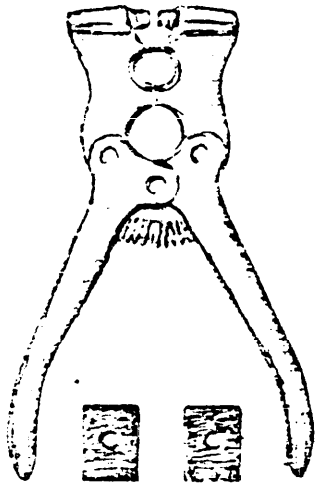

29

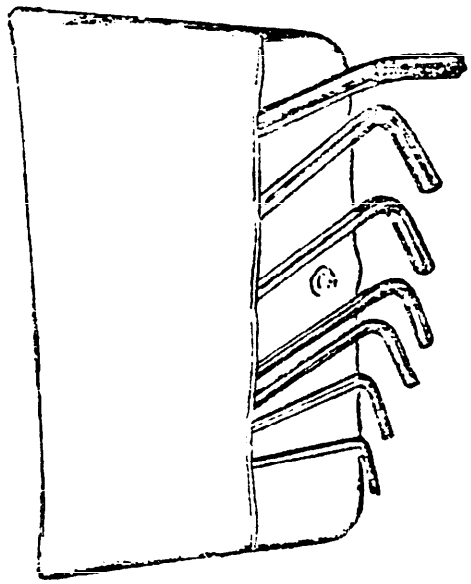


31




33



30

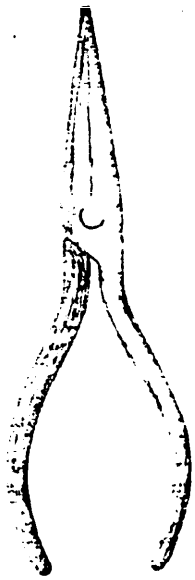

32

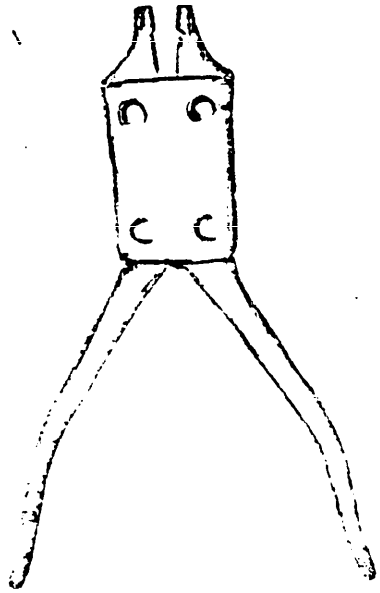

34

FIG. 5

Source: https://assist.dla.mil -- Downloaded: 202610-18T00:24Z
Check the source to verify that this is the current version before use.

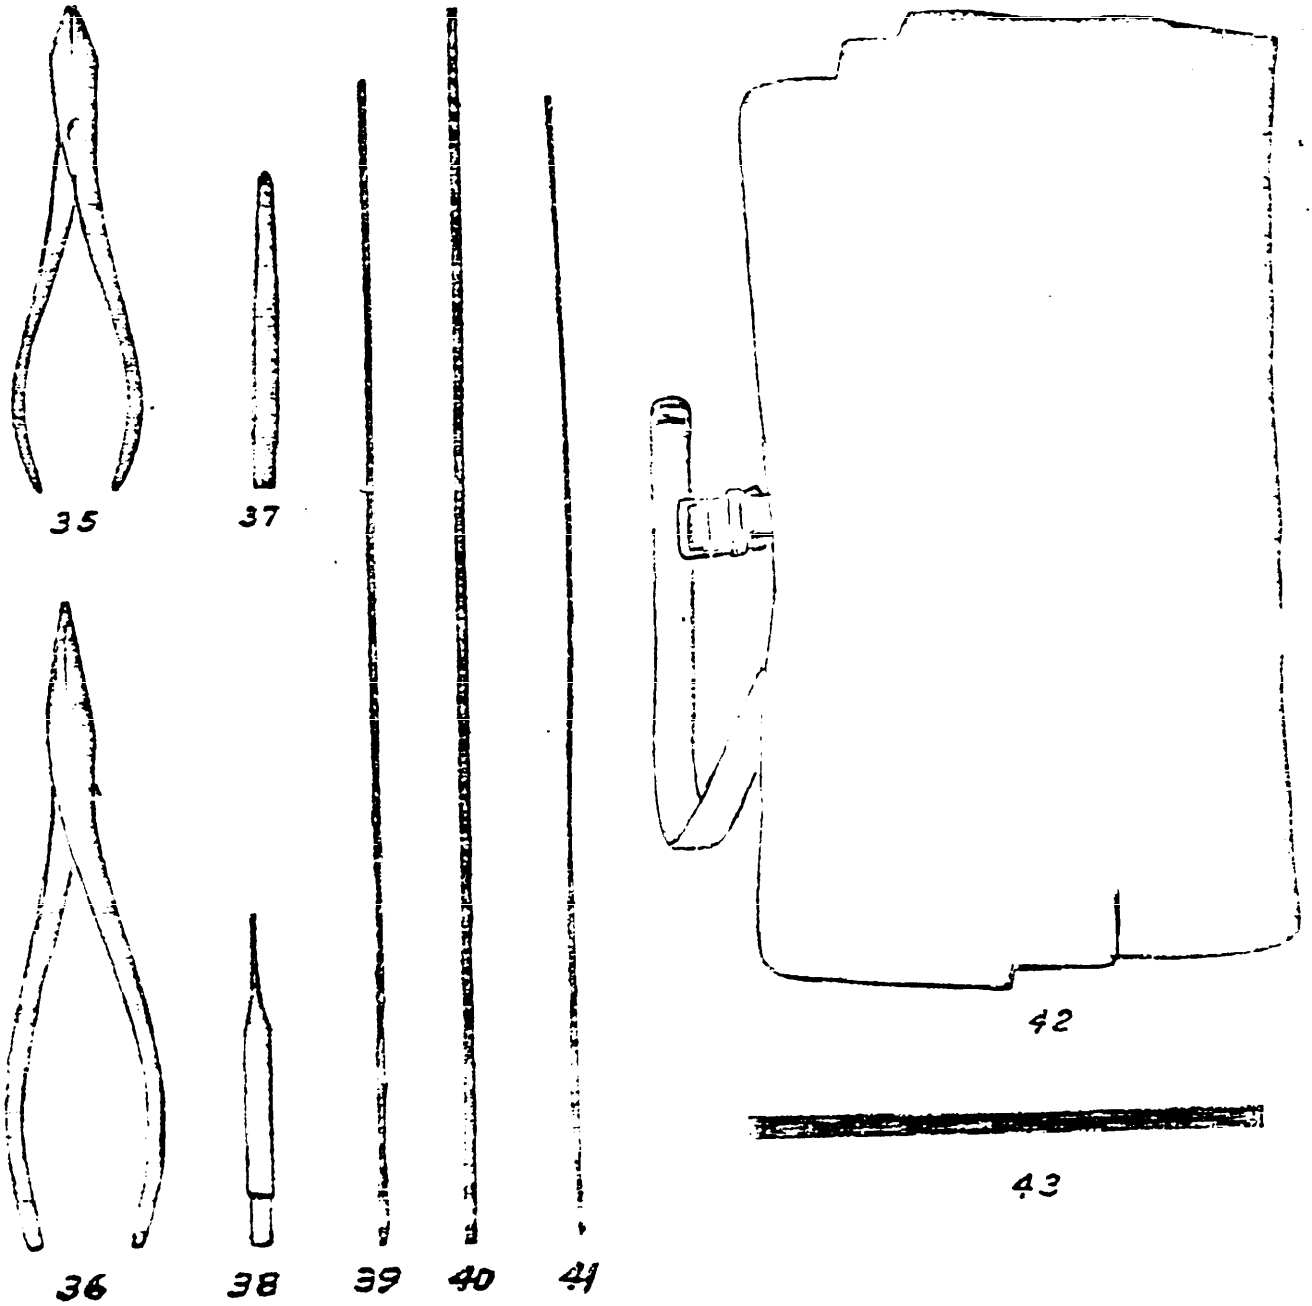


FIG. 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.

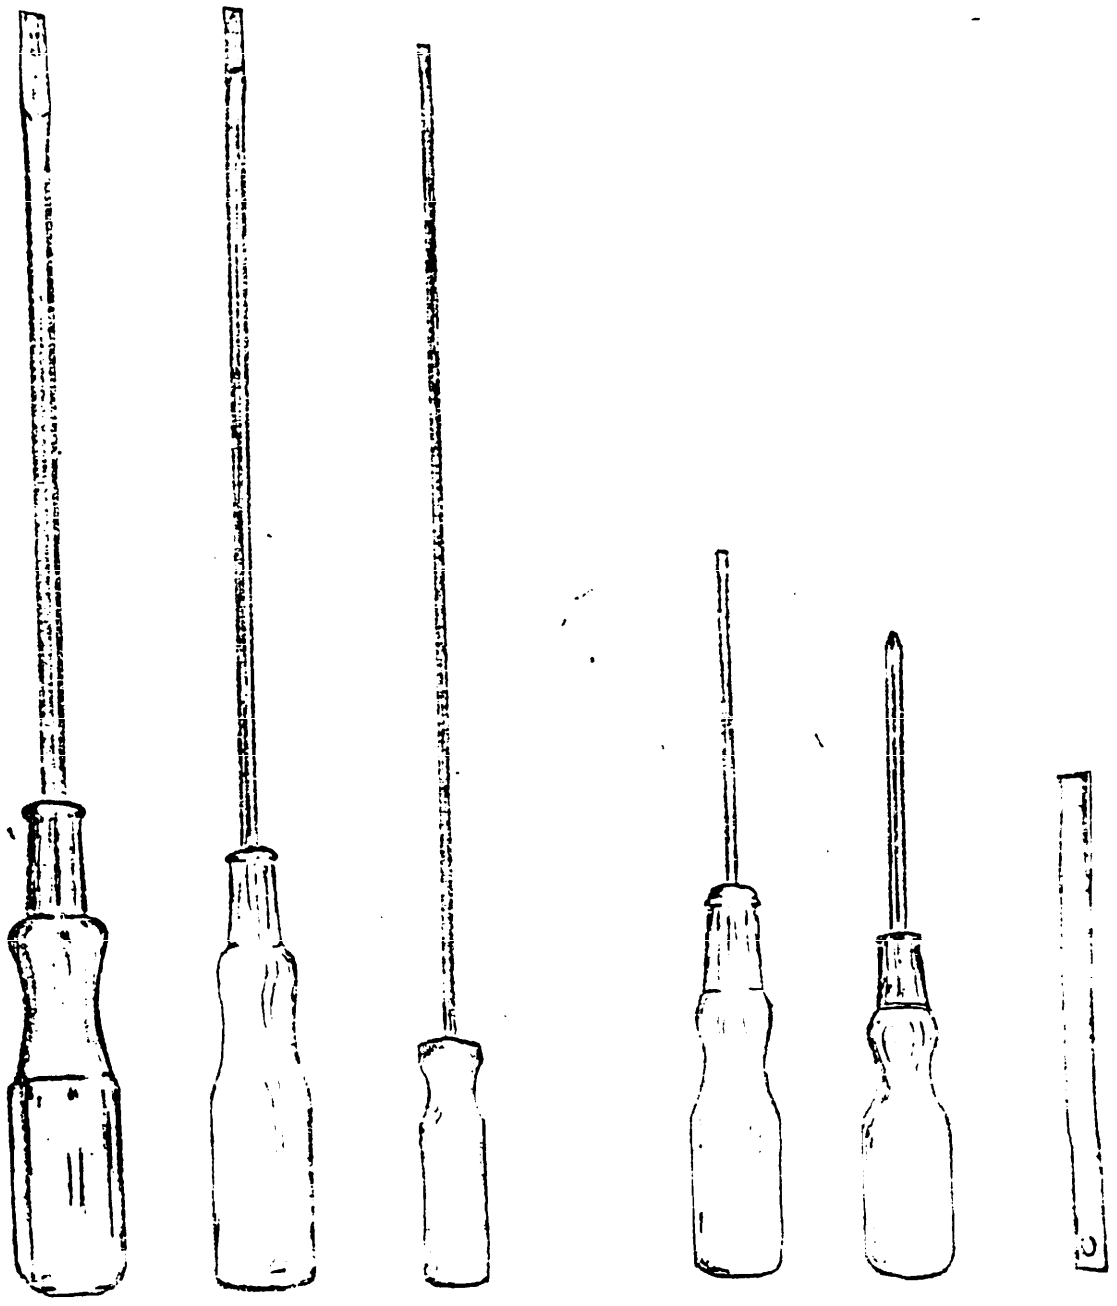



FIG. 7

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.


Item number Components Quantity See the




53




52



54



56

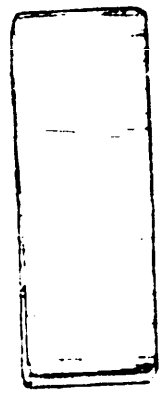

58

FIG. 8

Source: https://assist.dla.mil -- Downloaded: 202610-18T00:24Z
Check the source to verify that this is the current version before use.

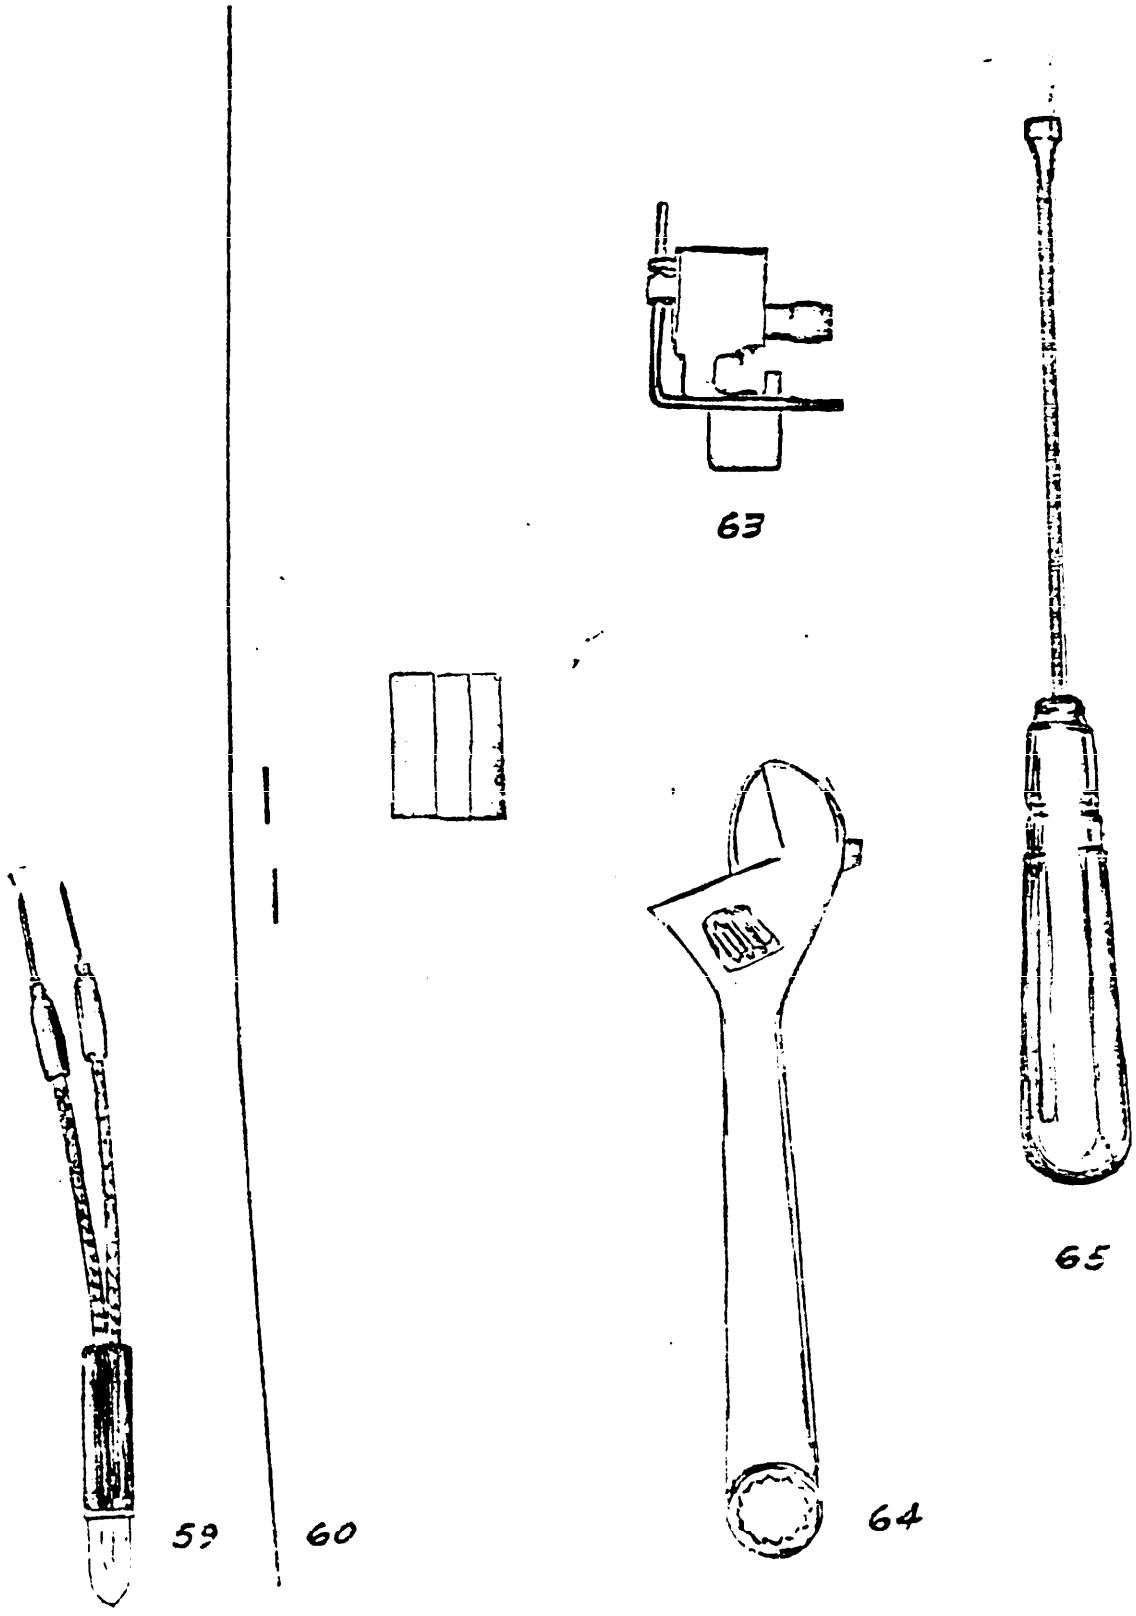
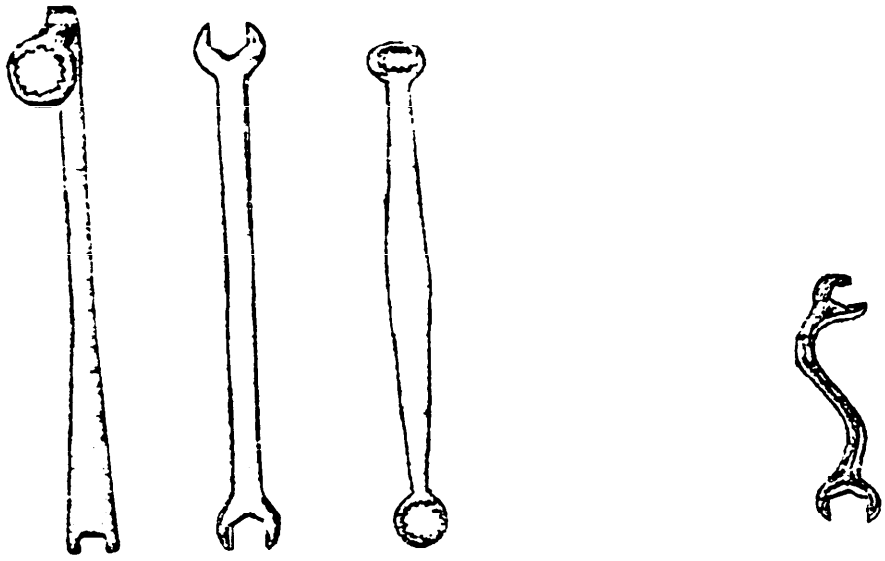


FIG. 9

Source: https://assist.dla.mil -- Downloaded: 202610-18T00:24Z
Check the source to verify that this is the current version before use.



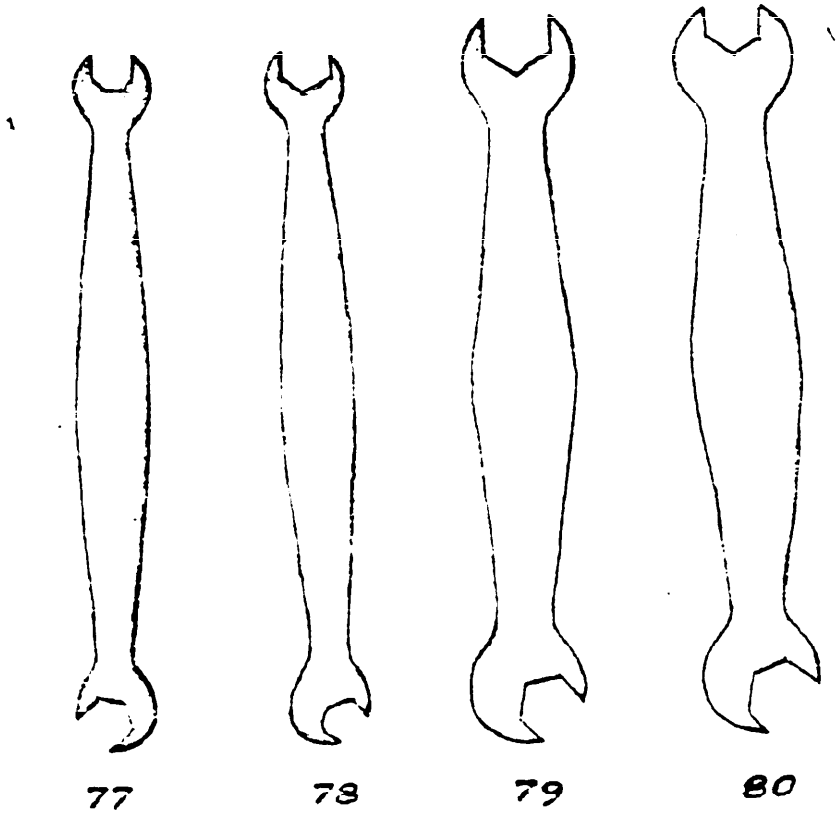
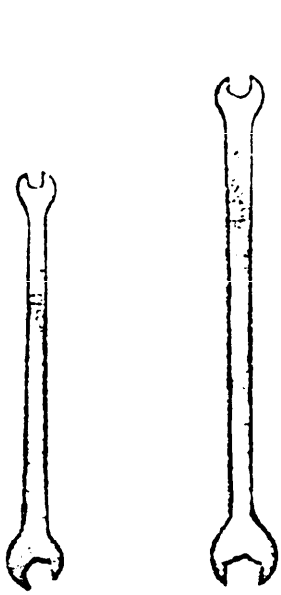
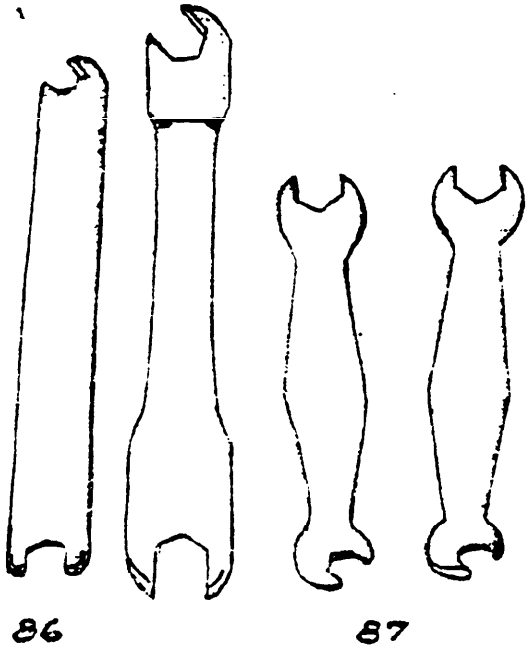


FIG. 10

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.







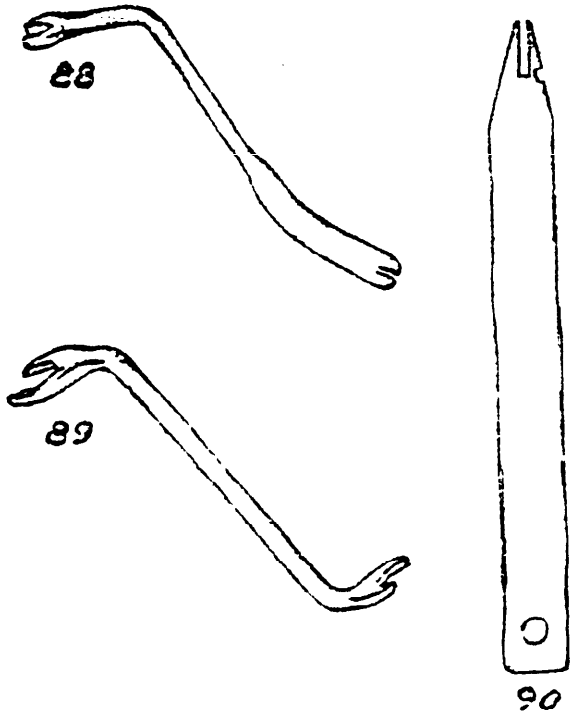


FIG. 11

Source: https://assist.dla.mil -- Downloaded: 202610-18T00:24Z
Check the source to verify that this is the current version before use.


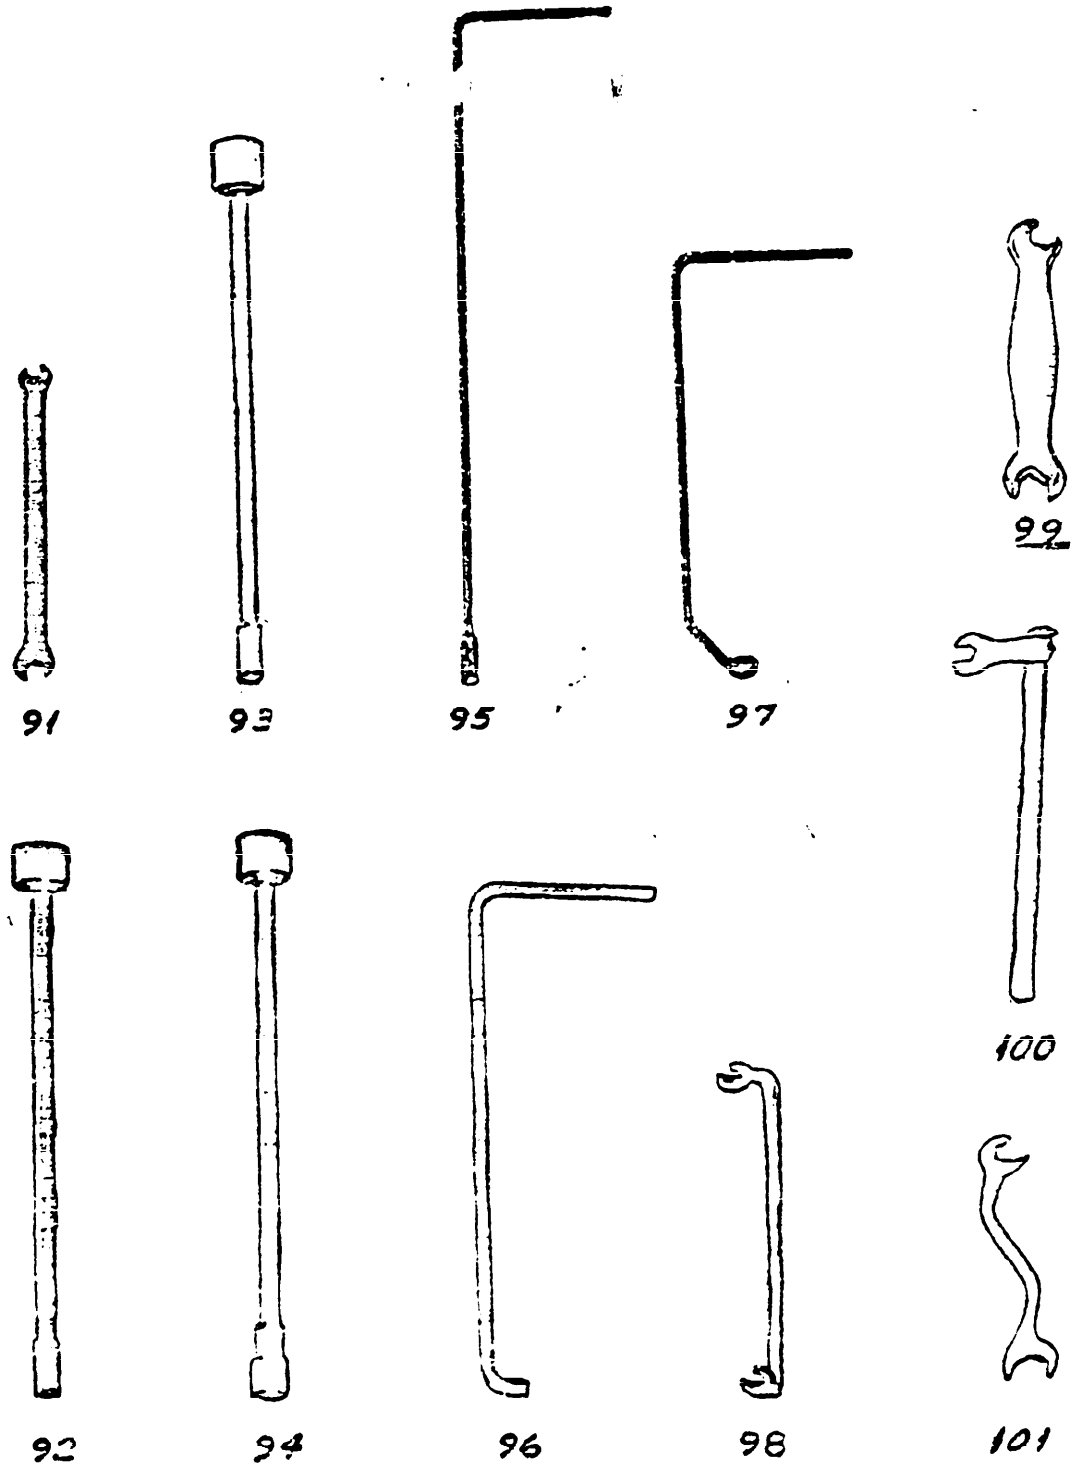


FIG. 12


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.




103




104



105

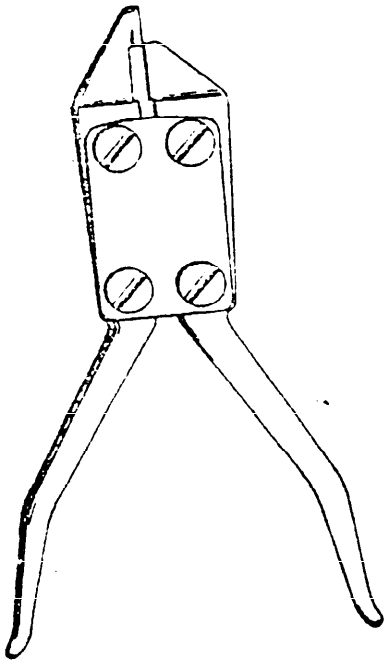

102



107

FIG. 13

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.



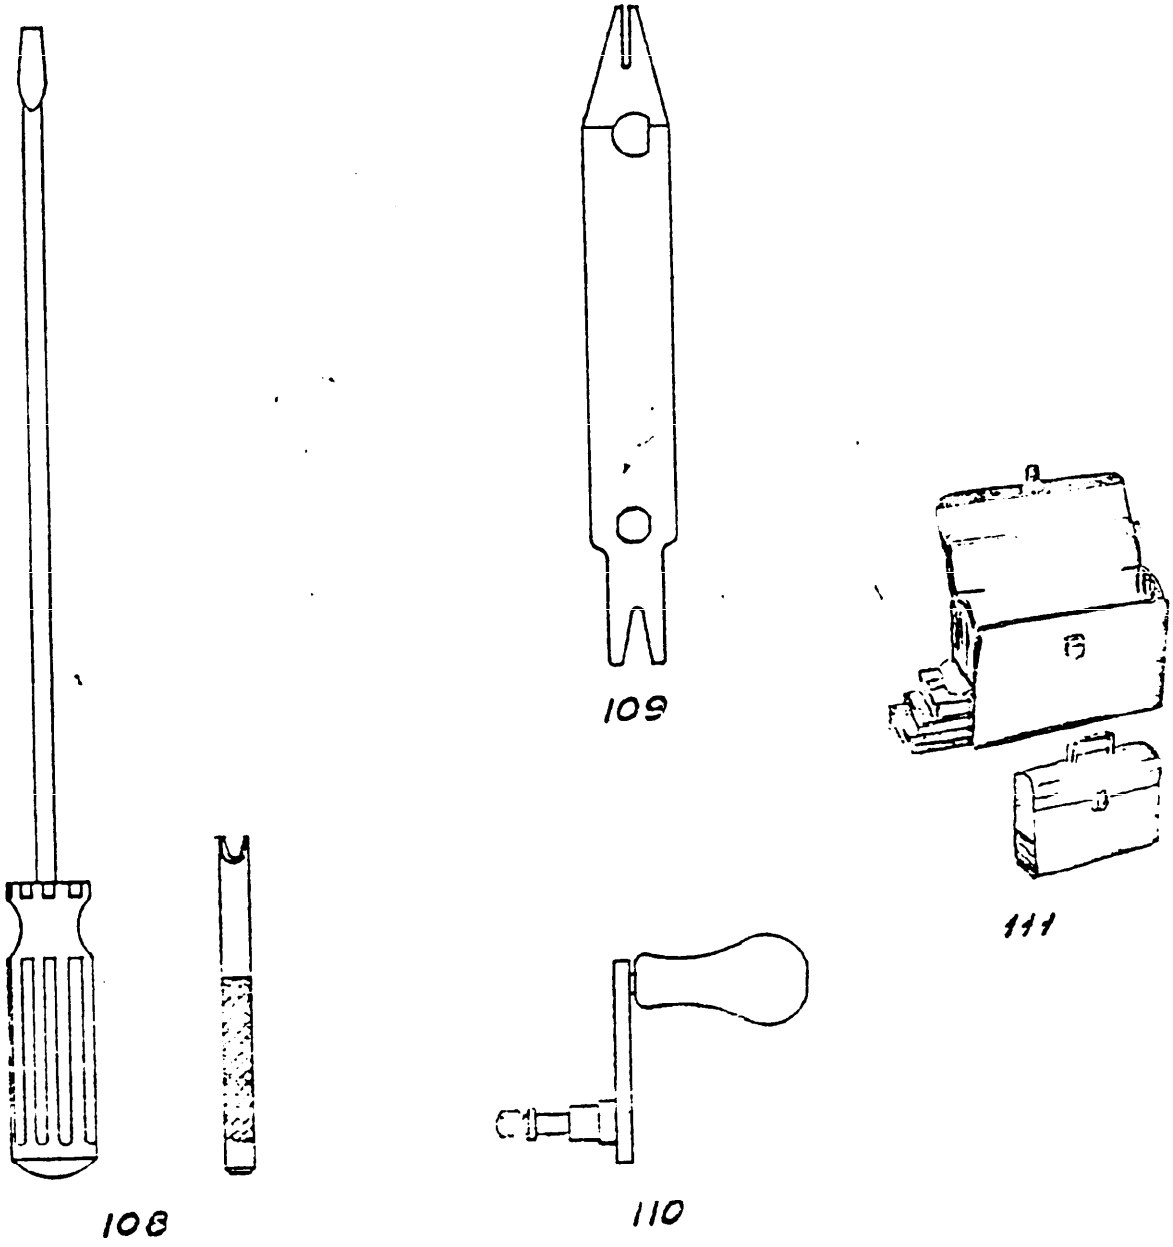


FIG. 14


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.




112



113




114

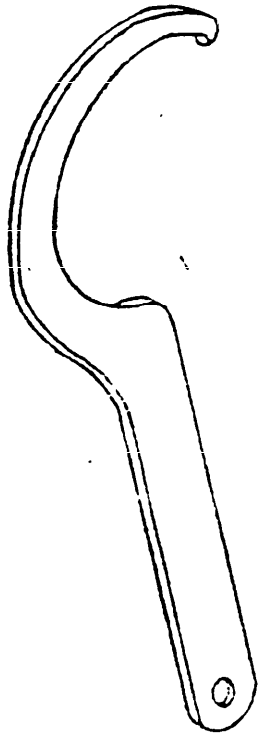


115

FIG. 15


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.

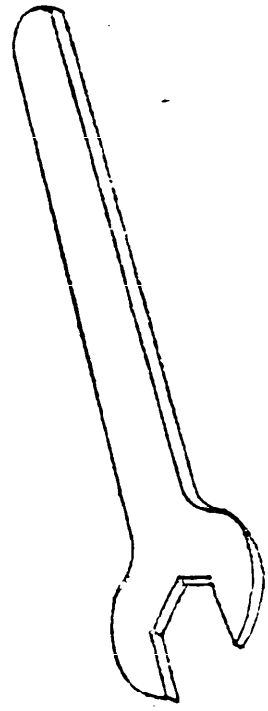

117

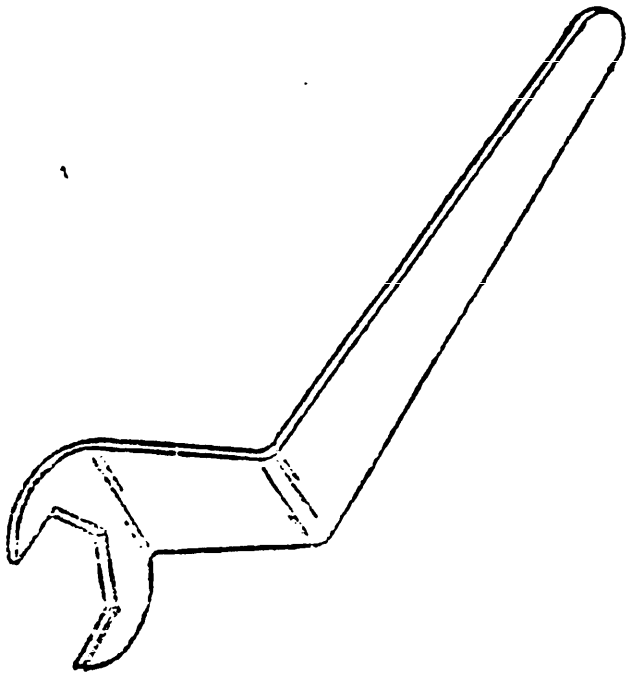


118

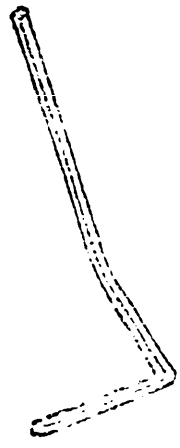

119

FIG. 16


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.

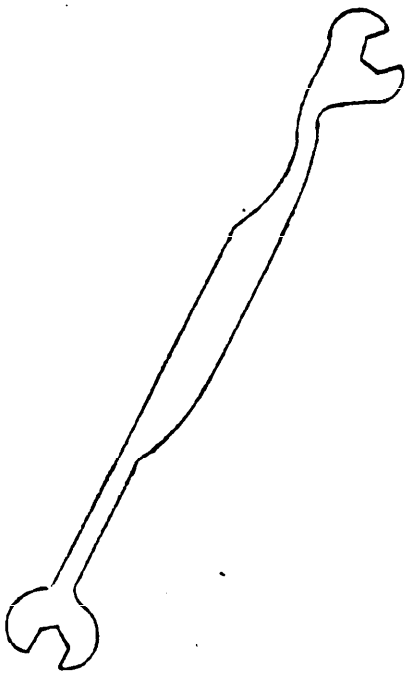


120



121

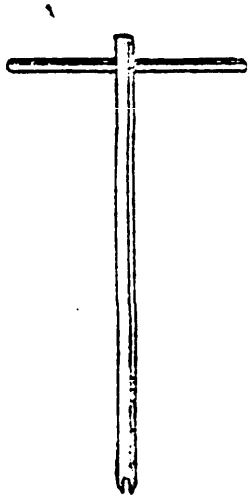


122




123

FIG 17


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.



124

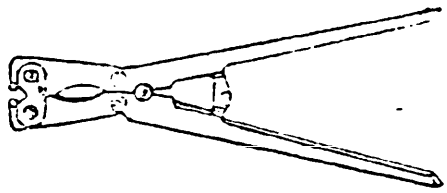


125




126
&
127




128



129




130




131

FIG. 18


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.

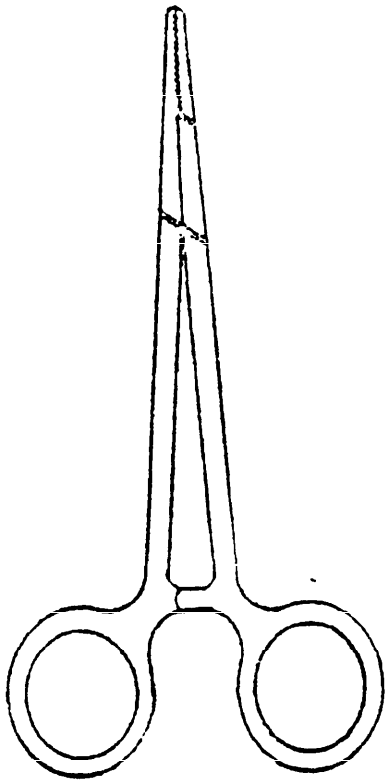


132

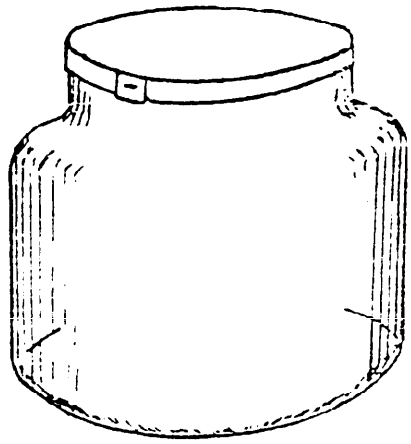

133

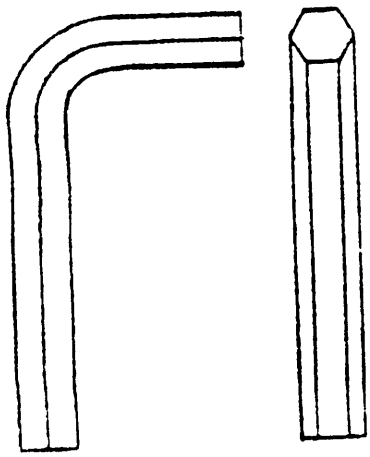

134



135

FIG. 19

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-T-13917F TOOL KIT, OFFICE MACHINES, REPAIR

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:24Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF DEFENSE
US Army Natick Research & Development Command
Kansas Street
Natick, MA 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S. MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

DRDNA-TDT

DEPARTMENT OF DEFENSE
US Army Natick Research and Development Command
Kansas Street
Natick, MA 01760

ATTN: DRDNA-TDT

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-18T00:24Z
Check the source to verify that this is the current version before use.