DD-J-112B
November 3, 1976
SUPERSEDING
Int. Fed. Spec. DD-J-00112A
September 25, 1967 and
Fed. Spec. DD-J-112
January 8, 1952

FEDERAL SPECIFICATION

JAR, BIOLOGICAL STAINING, COPLIN

This specification was approved by the Commissioner, Federal Supply Services, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 Scope. This specification covers requirements for a glass coplin biological staining jar for laboratory use.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

Federal Specifications:

PPP-B-566	- Boxes, Folding, Paperboard.
PPP-B-585	- Boxes, Wood, Wirebound.
PPP-B-601	- Boxes, Wood, Cleated Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Lock Corner.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-B-676	- Boxes, Setup.

Federal Standard:

Fed. Std. No. 123 - Marking for Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

FSC 6640

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:42Z
Check the source to verify that this is the current version before use.

(Single copies of this specification and other Federal specifications requir by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:

MIL-L-10547	- Liners, Case, and Sheet, Overwrap, Water-Vaporproof or Waterproof, Flexible.

Military Standards:

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposals shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM) STANDARD:

ASTM C 162	- Standard Definitions of Terms Relating to Glass and Glass Products.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

3. REQUIREMENTS

3.1 Component parts. Coplin jar shall consist of a glass jar and a glass cover.

3.2 Material. The glass shall be of a clear, transparent, soda-lime type.

3.3 Chemical durability. The glass shall be of such composition that it will not show any evidence of corrosion, scumming, chipping, or cracking when tested in accordance with 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:42Z
Check the source to verify that this is the current version before use.

3.4 Resistance to thermal shock. The jar or cover shall not break, crack, or chip when tested in accordance with 4.4.2.

3.5 Description.

3.5.1 Style and design. Style and design of jar and cover shall be as indicated in figure 1. Jar shall have a circular or hexagonal base.

3.5.2 Jar. The overall height of the jar, without cover, shall be 4-1/8 to 4-1/4 inches and the inside depth shall be 3-3/8 to 3-5/8 inches. It shall be made of heavy side wall 1/6 to 1/4 inch thick. The jar shall have a circular or hexagonal base 2-1/2 to 2-3/4 inches in diameter. The body of the jar shall be rectangular in horizontal cross-section and larger at the top than at the bottom. Outside corners of the body shall be rounded. Upon the outside of the jar, 1/8 to 1/4-inch below the top and extending completely around the jar, shall be a circular collar from 3/16-to 5/16-inch wide. Outer diameter of top shall be 2-13/32 $\pm$ 1/16 inches. Upon each of two opposing inside surfaces of the jar shall be four parallel vertical ridges, extending from the bottom of the jar, for a distance of 2 $\pm$ 1/8 inches up on each side. Ridges shall be not less than 1/8 inch apart and each end ridge shall be not less than 1/8 inch from its end wall. Each of the five channels or grooves thus formed shall be suitable for holding two slides, each 1.55 mm. thick, in each channel. Ridges shall be not less than 3/16 inch high; a plus tolerance of 1/16 inch will be pernitted. Internally, the body of the jar shall be 1-7/16 $\pm$ 1/16 inches square at the top and 1-1/8 $\pm$ 1/16 inches square at the bottom.

3.5.3 Cover. The cover shall be made of glass of approximately the same thickness as the side walls of the body. The cover shall have an overall height of 1/2 $\pm$ 1/16 inch. The cover shall fit over the mouth of the jar and shall rest on the collar which encircles the body of the jar. Opposing surfaces of the collar and the cover shall be ground to fit.

3.6 Workmanship. Workmanship shall be first class throughout. Jar and cover shall be colorless and shall be free of the defects specified in table III and other defects which detract from their appearance or may impair their serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:42Z
Check the source to verify that this is the currentversion before use.

4.1.1 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.2 Records. Records of examination and tests performed by or for the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

4.2 Sampling.

4.2.1 For examination (end item). Sampling for examination of end item shall be conducted in accordance with MIL-STD-105.

TABLE I. For examination

	Inspection level	AQL (defects per hundred units)
For visual examination		
Major defects	II	1.0
Minor defects	II	2.5
For dimensional examination	S-2	2.5

4.2.2 For tests. Sampling for tests shall be conducted in accordance with MIL-STD-105. Inspection levels and acceptable quality levels (AQL's) shall be as shown in table II. The sample unit shall be one jar and cover.

TABLE II. For tests

Component (unit of product)	Characteristic	Requirement	Test procedure	Inspection level	AQL (percent defective)
End item (jar and cover)	Chemical durability	3.3	4.4.1	S-2	*
	Thermal shock	3.4	4.4.2	S-2	*

* Acceptance number shall be zero.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:42Z
Check the source to verify that this is the current version before use.

4.3 Examinations.

4.3.1 End item.

4.3.1.1 Visual examination. The cover and jar shall be examined to determine compliance with applicable requirements of this specification (see 3.5). Examination shall be in accordance with but shall not be limited to the defects listed below. Definitions of glass defects shall be in accordance with ASTM C162.

TABLE III. Classification of defects

Categories and defects	
Major	
101	Cover and jar not free of cracks, chips, tears and breaks.
102	Cover and jar not free of open blisters.
103	Cover and jar not free of blisters over 3/32 inch.
104	Cover and jar not free of stones over 1/32 inch.
105	Jar not stable on a smooth flat surface.
106	Contacting surfaces of cover and collar of jar not ground to fit.
107	Cover and jar not free of rough and sharp edges.
108	Corners of jar body not rounded.
109	Jar and cover not transparent, except for the ground surface of the collar and cover.
110	Jar and cover not colorless.
Minor	
201	Cover and jar not free of bubbles.
202	Cover and jar not free of thin areas.
203	Cover and jar not free of protusions.
204	Jar not free of foreign material or dirt.
205	Cover and jar not free of seeds, strea and crizzles.
206	Cover and jar not free of deformed areas.

4.3.1.2 Dimensional examination. The cover and jar shall be examined for defects in dimensions. Any dimension not within the tolerance specified herein shall be classified as a defect.

4.3.2 Examination of preparation for delivery. An examination shall be performed to determine compliance with packaging, packing and marking of section 5. Defects shall be scored in accordance with table IV. The sample unit shall be one container prepared for delivery. The lot size shall be the number of shipping containers offered for examination at one time. Shipping shall be in in accordance with MIL-STD-105, inspection level S-2 and the AQL shall be 4.0 expressed in terms of percent defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:42Z
Check the source to verify that this is the current version before use.

TABLE IV. Examination or preparation for delivery

Examine	Defects
Materials	Any component missing or damaged.
Quantity	Quantity in interior packages and shipping containets not as specified.
Containers	Not as specified.
Workmanship	Inadequate application of components, or containers distorted.
Markings	Omitted, incorrect, illegible, improper size, location, sequence, or method of application.

4.3.2.1 Examination of closure, waterproofing and banding of container. When the container is required to comply with PPP-B-566, PPP-B-636, PPP-B-676, the examination for defects in closure, waterproofing or banding shall be in accordance with the appendix of the appropriate box specification.

4.4 **Tests.**

4.4.1 Chemical durability. The specimens shall be completely immersed in distilled water in a closed vessel having a small steam vent, and boiled continuously for 6 hours, boiling water being added when necessary to compensate for evaporation losses. The specimens shall be suspended in water so that they so not come in contact with the containing vessel.

4.4.2 Thermal shock. The specimens shall be immersed in water held at 145° ± 1° Fahrenheit (°F.), allowed to remain for 5 minutes, and then transferred to a cold water bath at a temperature of 70° ± 1°F. and immersed for 30 seconds, and then removed from the bath. The 5-minute immersion in the hot bath shall be controlled within 3 seconds and the time taked for the transfer from the hot to the cold shall be 15 seconds ± 1 second. The water shall not be emptied from the specimens during the transfer from the hot to the cold bath. During the tests the specimens shall be protected from drafts.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.1).

5.1.1 Unit of issue. One jar with cover constitutes one unit of issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:42Z
Check the source to verify that this is the current version before use.

5.1.1.1 Level A.

5.1.1.1.1 Unit package. Each jar, with cover in place, shall be packaged in a box of appropriate size constructed in accordance with PPP-B-566 or PPP-B-676. Closure shall be as specified in the appendix of the applicable box specification.

5.1.1.1.2 Intermediate package. Twelve (12) jars, packaged as specified in 5.1.1.1, shall be packaged in a box conforming to PPP-B-636, type CF, class domestic. Closure shall be as specified in appendix of the box specification.

5.1.1.2 Level C. Jars shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.1).

5.2.1 Level A. Seventy-two jars shall be packed in an exterior container designed for a type 2 load and constructed in accordance with PPP-B-585, class 3, style 3; PPP-B-601, overseas type; PPP-B-621, class 2; or PPP-B-636, class weather-resistant. Closure and strapping shall be as specified in the appendix of the applicable box specification.

5.2.1.1 Case liner. Each level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto. Case liner shall not be required for fiberboard boxes. Each fiberboard box shall be waterproofed as specified in the appendix of PPP-B-636.


5.2.2 Level B. Seventy-two jars shall be packaged in an exterior container designed for a type 2 load and constructed in accordance with PPP-B-585, class 1, style 3; PPP-B-601, domestic type; PPP-B-621, class 1; or PPP-B-636, class domestic. Closure shall be as specified in the appendix of the applicable box specification. Closure of fiberboard boxes shall conform to method II as specified in PPP-B-636.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Civil agencies. Marking for shipment shall be in accordance with Fed. Std. No. 123.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:42Z
Check the source to verify that this is the current version before use.

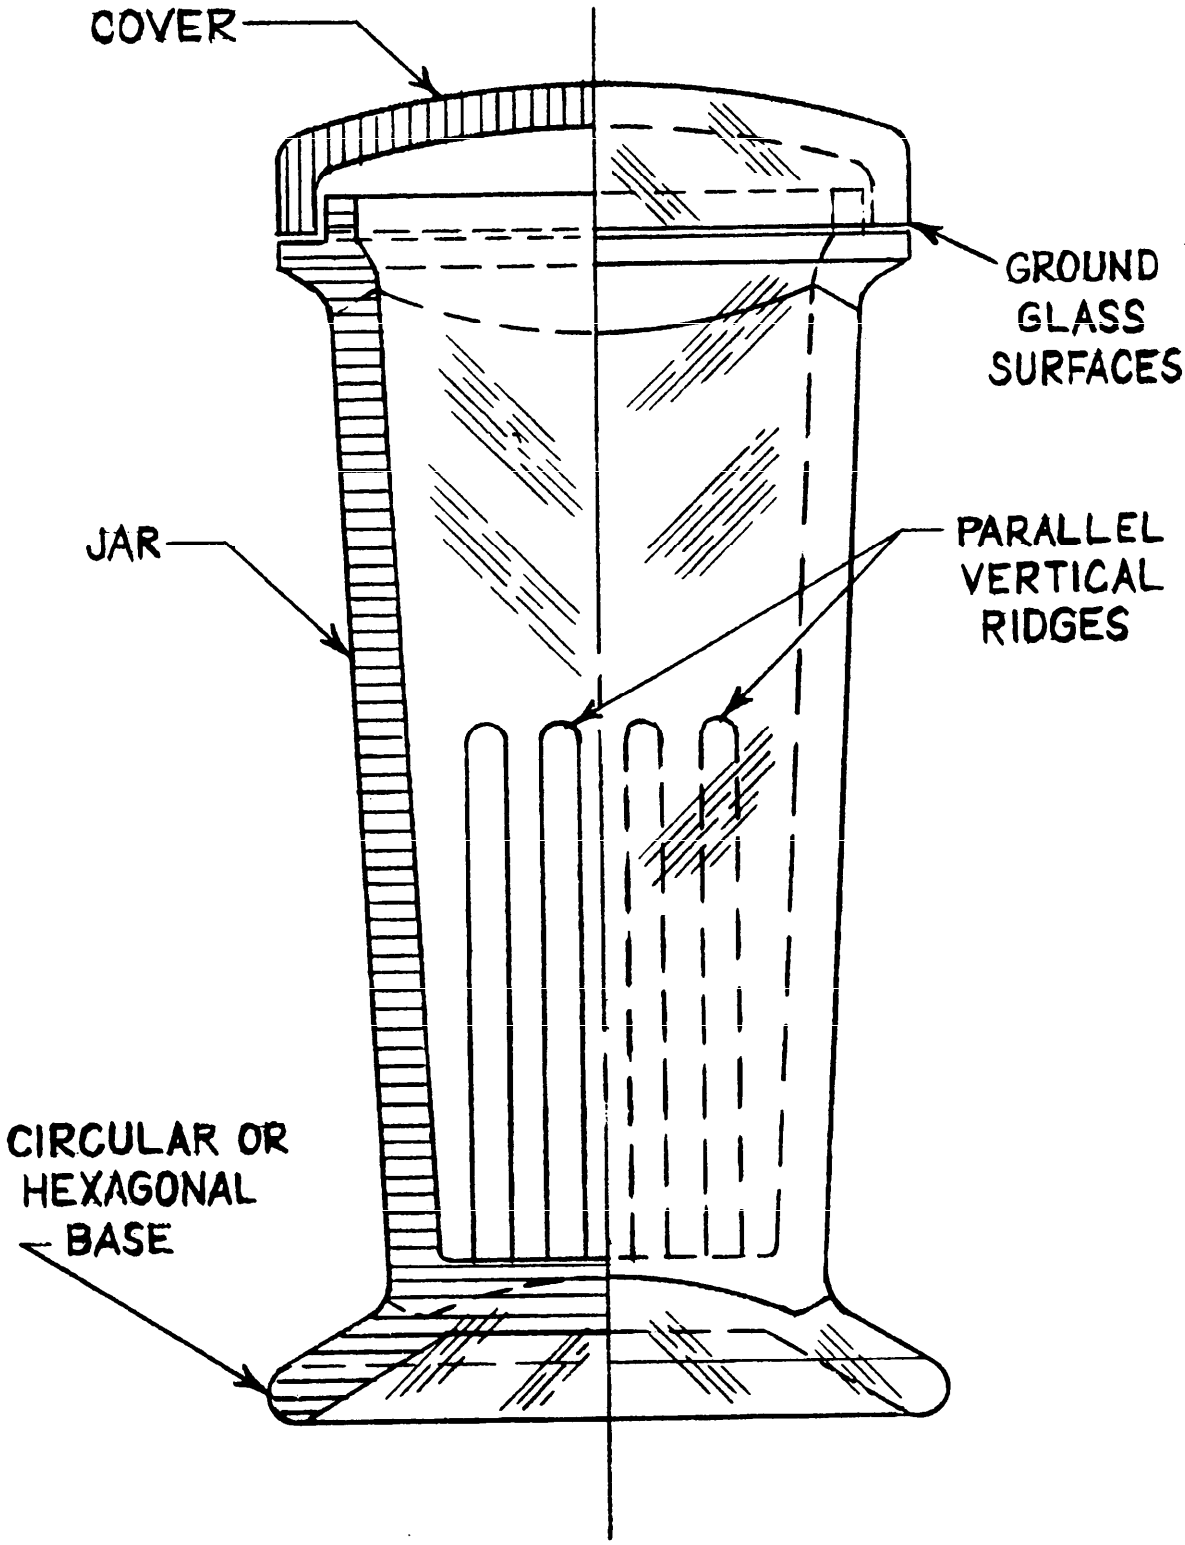

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:42Z
Check the source to verify that this is the current version before use.

5.3.2 Military activities. Each unit, intermediate package and exterior container shall be marked as specified in MIL-STD-129.

6. NOTES

6.1 Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

(a) Title, number and date of this specification.
(b) National Stock Number (NSN)
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.2 This specification does not cover all types, classes, grades, or sizes of the commodity indicated by the title of this specification, or those which are commercially available, but is intended to cover the types normally procured to meet Federal requirements.

6.3 This specification cover the following item shown in the Federal Supply Catalog:

National Stock Number	Item Identification
6640-00-430-1000	Jar, Biological, Staining, Coplin

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:42Z
Check the source to verify that this is the current version before use.

MILITARY CUSTODIANS:

Army - MD
Navy - MS
Air Force - 03

CIVIL AGENCY COORDINATING ACTIVITIES:

GSA - FSS
HEW - NIH
USDA - AFS
VA - DMS

PREPARING ACTIVITY: DSA - DM

Project No. 6640-0995

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 35 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

DD-J-112B - Jar, Biological Staining, Coplin

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:42Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE PERSONNEL SUPPORT CENTER
2800 South 20th Street
Philadelphia, PA 19101

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoD • 304

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:42Z
Check the source to verify that this is the current version before use.