FED SUP CLASS
5305

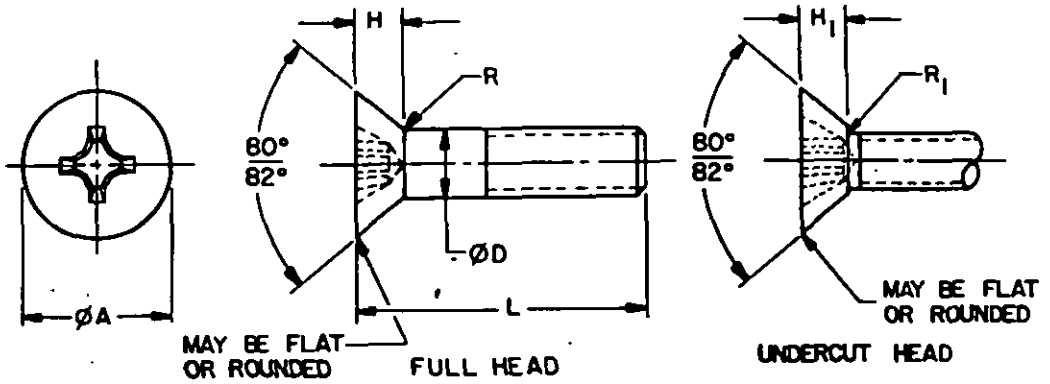


TABLE I. DASH NUMBERS AND DIMENSIONS

			#2 .086	#4 .112	#6 .138	#8 .164	#10 .190	1/4 .250	5/16 .3125	3/8 .375
NOMINAL SIZE										
THREADS PER INCH UNC-2A			56	40	32	32	24	20	18	16
ØD	BODY DIAMETER	MAX	.0860	.1120	.1380	.1640	.1900	.2500	.3125	.3750
		MIN	.0717	.0925	.1141	.1399	.1586	.2127	.2712	.3287
ØA	HEAD DIAMETER	MAX SHARP	.172	.225	.279	.332	.385	.507	.635	.762
		MIN SHARP	.156	.207	.257	.308	.359	.477	.600	.722
		ABS MIN	.147	.195	.244	.292	.340	.452	.568	.685
H	HEAD HEIGHT	REF	.051	.067	.083	.100	.116	.153	.191	.230
H_1	HEAD HEIGHT UNDERCUT	MAX	.036	.047	.059	.070	.081	.107	.134	.161
		MIN	.028	.038	.048	.058	.068	.092	.116	.140
R	RADIUS	MAX	.034	.045	.055	.066	.076	.100	.125	.150
R_1	RADIUS-UNDERCUT	MAX	.013	.017	.021	.025	.029	.038	.047	.056
DRIVER SIZE			1	1	2	2	2	3	4	4
TENSILE STRENGTH (LBS)		MIN	210	340	520	800	1000	1810	2990	4420

L LENGTH	TOLERANCE	#2 DASH NO	#4 DASH NO	#6 DASH NO	#8 DASH NO	#10 DASH NO	1/4 DASH NO	5/16 DASH NO	3/8 DASH NO
.125	+0 -.031	1	10	21	36				
.188		2	11	22	37				
.250		3	12	23	38	51			
.312		4	13	24	39	52	66		
.375		5	14	25	40	53	67	80	
.438		6	15	26	41	54	68	81	
.500		7	16	27	42	55	69	82	93
.625		8	17	28	43	56	70	83	94
.750		9	18	29	44	57	71	84	95
.875			19	30	45	58	72	85	96
1.000			20	31	46	59	73	86	97
1.250	+0 -.062			32	47	60	74	87	98
1.500				33	48	61	75	88	99
1.750				34	49	62	76	89	100
2.000				35	50	63	77	90	101
2.250	+0 -.094					64	78	91	102
2.500						65	79	92	103
2.750									104
3.000									105

(D) ENTIRE STANDARD REVISED

INCH - POUND

APPROVED 25 JUNE 53 REVISED (D) 5 DEC 89

USER ACTIVITIES:
NAVY - AS, MC, SH, YD
NASA - 86

REVIEWER ACTIVITIES:
ARMY - AT, AV, ME, MI
DLA - IS
GSA - FSS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document where applicable.

AMSC N/A

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY - AR Other Cust AIR FORCE - 82		SCREW, MACHINE-FLAT COUNTERSUNK HEAD, 82° CROSS-RECESSED, BRASS, UNC - 2A	MS35198
PROCUREMENT SPECIFICATION FF - S - 92	SUPERSEDES: MS35196, MS35245, MS35247, MS35358 IN PART, MS35363 IN PART, AND AN505 IN PART, BCKX3, 4, 4.1, BOAX15, 16, 33, AND 34.		PAGE 1 OF 4

DD FORM 672-1 (OVERPRINTED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5305 - 1736

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:11Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5305

REQUIREMENTS:

1. MATERIAL: BRASS IN ACCORDANCE WITH QQ-B-613, QQ-B-626 OR QQ-W-321 HAVING MINIMUM ULTIMATE TENSILE STRENGTH OF 57,000 PSI.

2. PROTECTIVE COATING: BLACK CHEMICAL FINISH IN ACCORDANCE WITH MIL-F-495. CADMIUM PLATE IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 2. (WHEN CADMIUM PLATING IS REQUIRED, A "C" SHALL FOLLOW THE DASH NUMBER).

3. THREADS: THE THREADS SHALL BE IN ACCORDANCE WITH SCREW-THREAD STANDARDS FOR FEDERAL SERVICES FED-STD-H28. ACCEPTABILITY OF SCREW THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/20, SYSTEM 21.

4. THREAD LENGTH: FULL FORM THREADS SHALL EXTEND TO WITHIN 2 THREADS OR LESS OF HEAD BEARING SURFACE FOR LENGTHS THRU 2.00 INCHES. LONGER LENGTHS SHALL HAVE A MINIMUM FULL FORM THREAD LENGTH OF 1.50 INCHES.

5. RECESS: THE RECESS SHALL BE IN ACCORDANCE WITH MS9006.

6. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS SHEET NUMBER, FOLLOWED BY A DASH NUMBER FROM TABLE I AND A CODE LETTER "C" FOR CADMIUM PLATE, TYPE II CLASS 2, IF APPLICABLE.

EXAMPLE: MS35198-1
- DASH NUMBER
- BASIC MS SHEET NUMBER

MS35198-1 INDICATES - SCREW, MACHINE-FLAT COUNTERSUNK HEAD, 82°, CROSS-RECESSED, BRASS, .086-56 UNC-2A, .125 LENGTH, BLACK CHEMICAL FINISH.

MS35198-1C INDICATES - SCREW, MACHINE-FLAT COUNTERSUNK HEAD, 82°, CROSS-RECESSED, BRASS, .086-56 UNC-2A, .125 LENGTH, CADMIUM PLATE

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION, FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
4. SIZES ABOVE DASHED LINES IN TABLE I HAVE UNDERCUT HEADS.

APPROVED 25 JUNE 53 REVISED (D) FOR CHANGES SEE PAGES 1 THROUGH 4

USER ACTIVITIES:
NAVY-AS, MC, SH, YD
NASA-86

REVIEWER ACTIVITIES:
ARMY-AT, AV, ME, MI
DLA-IS
GSA-FSS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Deviation for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY-AR Other Cust AIR FORCE-82		SCREW, MACHINE-FLAT COUNTERSUNK HEAD, 82° CROSS-RECESSED, BRASS, UNC-2A	MS35198
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDES: MS35196, MS35245, MS35247, MS35338 IN PART, MS35363 IN PART, AND AN505 IN PART, BCKX3, 4, 4.1, BOAX05, 18, 33, AND 34.		PAGE 2 OF 4

DD FORM 672-1 COORDINATED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5305-1736

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:11Z
Check the source to verify that this is the current version before use.

FED SUP CLASS 5305

THE SCREWS COVERED BY DASH NUMBERS GIVEN IN MS35196, MS35245, MS35247 ARE CANCELLED AFTER 15 NOVEMBER 1962. USE THE DASH NUMBERS GIVEN IN THE PRECEDING SHEETS. THE CANCELLED SCREWS CANNOT ALWAYS REPLACE THE SUPERSEDING SCREWS AND SHOULD BE USED UNTIL EXISTING STOCKS ARE DEPLETED. USE ONLY THE SUPERSEDING SCREWS FOR DESIGN AND REPLACEMENT. REPLACEMENT SHALL BE IN ACCORDANCE WITH THIS TABLE.

TABLE IIa. INTERCHANGEABILITY

CROSS REFERENCE OF PART NUMBERS

CANCELLED		SUPERSEDED BY	CANCELLED		SUPERSEDED BY	CANCELLED		SUPERSEDED BY
MS35196	MS35245 MS35247	MS35198	MS35196	MS35245 MS35247	MS35198	MS35196	MS35245 MS35247	MS35198
DASH NUMBER		DASH NUMBER	DASH NUMBER		DASH NUMBER	DASH NUMBER		DASH NUMBER
	1	NO REPLACEMENT		61	NO REPLACEMENT	99	120	99
	2	NO REPLACEMENT		62	NO REPLACEMENT	100	121	100
	3	NO REPLACEMENT		63	NO REPLACEMENT	101	122	101
	4	NO REPLACEMENT		64	NO REPLACEMENT	102	123	102
	5	NO REPLACEMENT		65	NO REPLACEMENT	103	124	103
	6	NO REPLACEMENT	51	66	51	104	125	104
	7	NO REPLACEMENT	52	67	52		126	105
1	8	1	53	68	53		127	NO REPLACEMENT
2	9	2	54	69	54		128	NO REPLACEMENT
3	10	3	55	70	55		129	NO REPLACEMENT
4	11	4	56	71	56		130	NO REPLACEMENT
5	12	5	57	72	57		131	NO REPLACEMENT
6	13	6	58	73	58		132	NO REPLACEMENT
7	14	7	59	74	59		133	NO REPLACEMENT
8	15	8	60	75	60		134	NO REPLACEMENT
9	16	9	61	76	61		135	NO REPLACEMENT
	17	NO REPLACEMENT	62	77	62		136	NO REPLACEMENT
10	18	10	63	78	63		137	NO REPLACEMENT
11	19	11	64	79	64		138	NO REPLACEMENT
12	20	12	65	80	65		139	NO REPLACEMENT
13	21	13		81	NO REPLACEMENT		140	NO REPLACEMENT
14	22	14		82	NO REPLACEMENT		141	NO REPLACEMENT
15	23	15	66	83	66		142	NO REPLACEMENT
16	24	16	67	84	67		143	NO REPLACEMENT
17	25	17	68	85	68		144	NO REPLACEMENT
18	26	18	69	86	69		145	NO REPLACEMENT
19	27	19	70	87	70		146	NO REPLACEMENT
20	28	20	71	88	71		147	NO REPLACEMENT
	29	NO REPLACEMENT	72	89	72		148	NO REPLACEMENT
	30	NO REPLACEMENT	73	90	73		149	NO REPLACEMENT
21	31	21	74	91	74		150	NO REPLACEMENT
22	32	22	75	92	75		151	NO REPLACEMENT
23	33	23	76	93	76		152	NO REPLACEMENT
24	34	24	77	94	77		153	NO REPLACEMENT
25	35	25	78	95	78		154	NO REPLACEMENT
26	36	26	79	96	79		155	NO REPLACEMENT
27	37	27		97	NO REPLACEMENT		156	NO REPLACEMENT
28	38	28		98	NO REPLACEMENT		157	NO REPLACEMENT
29	39	29	80	99	80		158	NO REPLACEMENT
30	40	30	81	100	81		159	NO REPLACEMENT
31	41	31	82	101	82		160	NO REPLACEMENT
32	42	32	83	102	83		161	NO REPLACEMENT
33	43	33	84	103	84		162	NO REPLACEMENT
34	44	34	85	104	85		163	NO REPLACEMENT
35	45	35	86	105	86		164	NO REPLACEMENT
36	46	36	87	106	87		165	NO REPLACEMENT
37	47	37	88	107	88		166	NO REPLACEMENT
38	48	38	89	108	89		167	NO REPLACEMENT
39	49	39	90	109	90		168	NO REPLACEMENT
40	50	40	91	110	91		169	NO REPLACEMENT
41	51	41	92	111	92		170	NO REPLACEMENT
42	52	42		112	NO REPLACEMENT		171	NO REPLACEMENT
43	53	43		113	NO REPLACEMENT		172	NO REPLACEMENT
44	54	44	93	114	93		173	NO REPLACEMENT
45	55	45	94	115	94		174	NO REPLACEMENT
46	56	46	95	116	95		175	NO REPLACEMENT
47	57	47	96	117	96		176	NO REPLACEMENT
48	58	48	97	118	97		177	NO REPLACEMENT
49	59	49	98	119	98		178	NO REPLACEMENT
50	60	50						

APPROVED 25 JUNE 53 REVISED (D) FOR CHANGES SEE PAGES 1 THROUGH 4

USER ACTIVITIES: NAVY – AS, MC, SH, YD NASA – 66

REVIEWER ACTIVITIES: ARMY – AT, AV, ME, MI DLA – IS GSA – FSS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited. This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY - AR Other Cust AIR FORCE - 82		SCREW, MACHINE-FLAT COUNTERSUNK HEAD, 82° CROSS-RECESSED, BRASS, UNC - 2A	MS35198
PROCUREMENT SPECIFICATION FF - S - 92	SUPERSEDES: MS35196, MS35245, MS35247, MS35338 IN PART, MS35363 IN PART, AND AN505 IN PART, BCKX3, 4, 4.1, BOAX15, 16, 33, AND 34.		PAGE 3 OF 4

DD FORM 672-1 (SUPERSEDES MIL-STD-12) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5305 - 1736

Downloaded from https://assist.dla.mil -- Downloaded: 2026-10-23T17:11Z
Check the source to verify that this is the current version before use.

TABLE IIb. - INTERCHANGEABILITY

FED SUP CLASS 5305

SCREWS COVERED BY THE FOLLOWING DASH NUMBERS GIVEN ON AN505 ARE INACTIVATED AFTER 4 MAY 1965. USE THE SUPERSEDING DASH NUMBERS AS GIVEN. THE INACTIVATED SCREWS CAN NOT ALWAYS REPLACE THE SUPERSEDING SCREWS AND SHOULD BE USED UNTIL EXISTING STOCKS ARE DEPLETED. USE ONLY THE SUPERSEDING SCREWS FOR DESIGN AND REPLACEMENT. REPLACEMENT SHALL BE IN ACCORDANCE WITH THIS TABLE (1/ SEE NOTE BELOW.)

CROSS REFERENCE OF PART NUMBERS

INACTIVATED AN505		SUPERSEDED BY MS35198	INACTIVATED AN505		SUPERSEDED BY MS35198	INACTIVATED AN505		SUPERSEDED BY MS35198
DASH NUMBER		DASH NUMBER	DASH NUMBER		DASH NUMBER	DASH NUMBER		DASH NUMBER
B2R3	UB2R3	2	B6R7	UB6R7	41	B416R18	UB416R18	NO REPLACEMENT
B2R4	UB2R4	3	B6R8	UB6R8	42	B416R20	UB416R20	74
B2R5	UB2R5	4	B6R9	UB6R9	NO REPLACEMENT	B416R22	UB416R22	NO REPLACEMENT
B2R6	UB2R6	5	B6R10	UB6R10	43	B416R24	UB416R24	75
B2R7	UB2R7	6	B6R11	UB6R11	NO REPLACEMENT	B416R26	UB416R26	NO REPLACEMENT
B2R8	UB2R8	7	B6R12	UB6R12	44	B416R28	UB416R28	76
B2R9	UB2R9	NO REPLACEMENT	B6R13	UB6R13	NO REPLACEMENT	B416R30	UB416R30	NO REPLACEMENT
B2R10	UB2R10	8	B6R14	UB6R14	45	B461R32	UB416R32	77
B2R11	UB2R11	NO REPLACEMENT	B6R15	UB6R15	NO REPLACEMENT	B416R34	UB416R34	NO REPLACEMENT
B2R12	UB3R12	9	B6R16	UB6R16	46	B416R36	UB416R36	78
B3R3	UB3R3		B6R18	UB6R18	NO REPLACEMENT	B416R38	UB416R38	NO REPLACEMENT
THRU	THRU	NO REPLACEMENT	B6R20	UB6R20	47	B416M40	UB416M40	79
B3R16	UB4R16		B6R22	UB6R22	NO REPLACEMENT	B416M42	UB416M42	NO REPLACEMENT
B4R3	UB4R3	11	B6R24	UB6R24	48	B416M44	UB416M44	NO REPLACEMENT
B4R4	UB4R4	12	B6R26	UB6R26	NO REPLACEMENT	B416M46	UB416M46	NO REPLACEMENT
B4R5	UB4R5	13	B6R28	UB6R28	49	B416M48	UB416M48	NO REPLACEMENT
B4R6	UB4R6	14	B6R30	UB6R30	NO REPLACEMENT	B516R8	UB516R8	82
B4R7	UB4R7	15	B6R32	UB6R32	50	B516R9	UB516R9	NO REPLACEMENT
B4R8	UB4R8	16	B8R34	UB8R34	NO REPLACEMENT	B516R10	UB516R10	83
B4R9	UB4R9	NO REPLACEMENT	B8R36	UB8R36	NO REPLACEMENT	B516R11	UB516R11	NO REPLACEMENT
B4R10	UB4R10	17	B8R38	UB8R38	NO REPLACEMENT	B516R12	UB516R12	84
B4R11	UB4R11	NO REPLACEMENT	B8M40	UB8M40	NO REPLACEMENT	B516R13	UB516R13	NO REPLACEMENT
B4R12	UB4R12	18	B8M42	UB8M42	NO REPLACEMENT	B516R14	UB516R14	85
B4R13	UB4R13	NO REPLACEMENT	B8M44	UB8M44	NO REPLACEMENT	B516R15	UB516R15	NO REPLACEMENT
B4R14	UB4R14	19	B8M46	UB8M46	NO REPLACEMENT	B516R16	UB516R16	86
B4R15	UB4R15	NO REPLACEMENT	B8M48	UB8M48	NO REPLACEMENT	B516R18	UB516R18	NO REPLACEMENT
B4R16	UB4R16	20	B10R5	UB10R5	52	B516R20	UB516R20	87
B4R18	UB4R18	NO REPLACEMENT	B10R6	UB10R6	53	B516R22	UB516R22	NO REPLACEMENT
B4R20	UB4R20	NO REPLACEMENT	B10R7	UB10R7	54	B516R24	UB516R24	88
B4R22	UB4R22	NO REPLACEMENT	B10R8	UB10R8	55	B516R26	UB516R26	NO REPLACEMENT
B4R24	UB4R24	NO REPLACEMENT	B10R9	UB10R9	NO REPLACEMENT	B516R28	UB516R28	89
B5R3	UB5R3		B10R10	UB10R10	56	B516R30	UB516R30	NO REPLACEMENT
THRU	THRU	NO REPLACEMENT	B10R11	UB10R11	NO REPLACEMENT	B516R32	UB516R32	90
B5R24	UB5R24		B10R12	UB10R12	57	B516R34	UB516R34	NO REPLACEMENT
B6R3	UB6R3	22	B10R13	UB10R13	NO REPLACEMENT	B516R36	UB516R36	91
B6R4	UB6R4	23	B10R14	UB10R14	58	B516R38	UB516R38	NO REPLACEMENT
B6R5	UB6R5	24	B10R15	UB10R15	NO REPLACEMENT	B516M40	UB516M40	92
B6R6	UB6R6	25	B10R16	UB10R16	59	B516M42	UB516M42	NO REPLACEMENT
B6R7	UB6R7	26	B10R18	UB10R18	NO REPLACEMENT	B516M44	UB516M44	NO REPLACEMENT
B6R8	UB6R8	27	B10R20	UB10R20	60	B516M46	UB516M46	NO REPLACEMENT
B6R9	UB6R9	NO REPLACEMENT	B10R22	UB10R22	NO REPLACEMENT	B516M48	UB516M48	NO REPLACEMENT
B6R10	UB6R10	28	B10R24	UB10R24	61	B616R8	UB616R8	93
B6R11	UB6R11	NO REPLACEMENT	B10R26	UB10R26	NO REPLACEMENT	B616R9	UB616R9	NO REPLACEMENT
B6R12	UB6R12	29	B10R28	UB10R28	62	B616R10	UB616R10	94
B6R13	UB6R13	NO REPLACEMENT	B10R30	UB10R30	NO REPLACEMENT	B616R11	UB616R11	NO REPLACEMENT
B6R14	UB6R14	30	B10R32	UB10R32	63	B616R12	UB616R12	95
B6R15	UB6R15	NO REPLACEMENT	B10R34	UB10R34	NO REPLACEMENT	B616R13	UB616R13	NO REPLACEMENT
B6R16	UB6R16	31	B10R36	UB10R36	64	B616R14	UB616R14	96
B6R18	UB6R18	NO REPLACEMENT	B10R38	UB10R38	NO REPLACEMENT	B616R15	UB616R15	NO REPLACEMENT
B6R20	UB6R20	32	B10M40	UB10M40	65	B616R16	UB616R16	97
B6R22	UB6R22	NO REPLACEMENT	B10M42	UB10M42	NO REPLACEMENT	B616R18	UB616R18	NO REPLACEMENT
B6R24	UB6R24	33	B10M44	UB10M44	NO REPLACEMENT	B616R20	UB616R20	98
B6R26	UB6R26	NO REPLACEMENT	B10M46	UB10M46	NO REPLACEMENT	B616R22	UB616R22	NO REPLACEMENT
B6R28	UB6R28	34	B10M48	UB10M48	NO REPLACEMENT	B616R24	UB616R24	99
B6R30	UB6R30	NO REPLACEMENT	B416R5	UB416R5	66	B616R26	UB616R26	NO REPLACEMENT
B6R32	UB6R32	35	B416R6	UB416R6	67	B616R28	UB616R28	100
B6R34	UB6R34	NO REPLACEMENT	B416R7	UB416R7	68	B616R30	UB616R30	NO REPLACEMENT
B6R36	UB6R36	NO REPLACEMENT	B416R8	UB416R8	69	B616R32	UB616R32	101
B6R38	UB6R38	NO REPLACEMENT	B416R9	UB416R9	NO REPLACEMENT	B616R34	UB616R34	NO REPLACEMENT
B6M40	UB6M40	NO REPLACEMENT	B416R10	UB416R10	70	B616R36	UB616R36	102
B6M42	UB6M42	NO REPLACEMENT	B416R11	UB416R11	NO REPLACEMENT	B616R38	UB616R38	NO REPLACEMENT
B6M44	UB6M44	NO REPLACEMENT	B416R12	UB416R12	71	B616M40	UB616M40	103
B6M46	UB6M46	NO REPLACEMENT	B416R13	UB416R13	NO REPLACEMENT	B616M42	UB616M42	NO REPLACEMENT
B6M48	UB6M48	NO REPLACEMENT	B416R14	UB416R14	72	B616M44	UB616M44	104
B8R4	UB8R4	38	B416R15	UB416R15	NO REPLACEMENT	B616M46	UB616M46	NO REPLACEMENT
B8R5	UB8R5	39	B416R16	UB416R16	73	B616M48	UB616M48	105
B8R6	UB8R6	40						

1/ ALL CADMIUM PLATED, BRASS MACHINE SCREWS GIVEN ON AN505, DASH NUMBERS PB2R3 THRU PB616M48 ARE INACTIVATED FOR NEW DESIGN AFTER 4 MAY 1965. THEIR EXISTING STOCKS SHOULD BE USED UNTIL DEPLETED. HAVING NO REPLACEMENTS THESE SCREWS MAY BE USED FOR MAINTENANCE PURPOSES ONLY. FOR NEW DESIGN, CONSIDERATION SHOULD BE GIVEN TO THE USE OF SCREWS GIVEN ON THIS STANDARD MS35198 OR MS35190.

APPROVED 25 JUNE 53 REVISED (D) FOR CHANGES SEE PAGES 1 THROUGH 4

USER ACTIVITIES: NAVY - AS, MC, SH, YD; NASA - 86

REVIEWER ACTIVITIES: ARMY - AT, AV, ME, MI; DLA - IS; GSA - FSS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited. This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY - AR Other Cust AIR FORCE-82		SCREW, MACHINE-FLAT COUNTERSUNK HEAD, 82° CROSS-RECESSED, BRASS, UNC - 2A	MS35198
PROCUREMENT SPECIFICATION: FF - S - 92	SUPERSEDES: MS35196, MS35245, MS35247, MS35338 IN PART, MS35365 IN PART, AND AN505 IN PART, BCKX3, 4, 4.1, BOAX15, 16, 33, AND 34.		PAGE 4 OF 4

DD FORM 672-1 (MAY 53) SUPERSEDES PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5305 - 1736

Source: https://assist.dla.mil -- Downloaded: 2026-10-23117:11Z
Check the source to verify that this is the current version before use.