THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED BY THE SOLICITATION: ASME B18.21.1

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form Approved
OMB No. 0704-0188

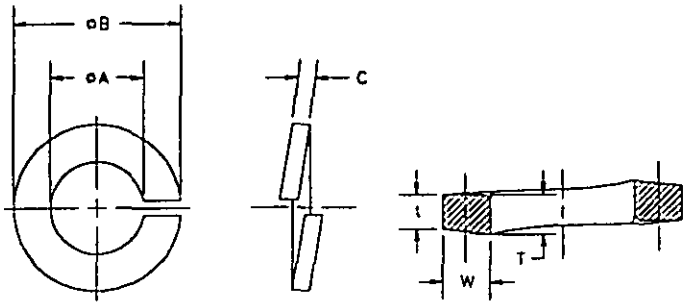



TABLE I. DASH NUMBERS AND DIMENSIONS

| NOMINAL SIZE | CARBON STEEL | | PH BRZ OR TIN BRS | NICKEL COPPER ALLOY | CRESS 300 SERIES | CRES 420 | øA (ID) | | øB (OD) | WASHER SECTION | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | CAD OR ZINC | PHOS | | | | | | | | W WIDTH | C THICK $\frac{T+t}{2}$ |
| | DASH NUMBERS | | | | | | MIN | MAX | MAX | MIN | MIN 1/ |
| NO.2 (.086) | 39 | 58 | 96 | 115 | 134 | 153 | .088 | .094 | .172 | .035 | .020 |
| NO.4 (.112) | 40 | 59 | 97 | 116 | 135 | 154 | .114 | .120 | .209 | .040 | .025 |
| NO.6 (.138) | 41 | 60 | 98 | 117 | 136 | 155 | .141 | .148 | .250 | .047 | .031 |
| NO.8 (.164) | 42 | 61 | 99 | 118 | 137 | 156 | .167 | .174 | .293 | .055 | .040 |
| NO.10 (.190) | 43 | 62 | 100 | 119 | 138 | 157 | .193 | .200 | .334 | .062 | .047 |
| 1/4 (.250) | 44 | 63 | 101 | 120 | 139 | 158 | .252 | .260 | .487 | .109 | .062 |
| 5/16 (.312) | 45 | 64 | 102 | 121 | 140 | 159 | .314 | .322 | .583 | .125 | .078 |
| 3/8 (.375) | 46 | 65 | 103 | 122 | 141 | 160 | .377 | .385 | .680 | .141 | .094 |
| 7/16 (.437) | 47 | 66 | 104 | 123 | 142 | 161 | .440 | .450 | .776 | .156 | .109 |
| 1/2 (.500) | 48 | 67 | 105 | 124 | 143 | 162 | .502 | .512 | .889 | .171 | .125 |
| 9/16 (.562) | 49 | 68 | 106 | 125 | 144 | 163 | .564 | .574 | .965 | .188 | .141 |
| 5/8 (.625) | 50 | 69 | 107 | 126 | 145 | 164 | .628 | .641 | 1.073 | .203 | .156 |
| 3/4 (.750) | 51 | 70 | 108 | 127 | 146 | 165 | .753 | .766 | 1.265 | .234 | .188 |
| 7/8 (.875) | 52 | 71 | 109 | 128 | 147 | 166 | .878 | .894 | 1.459 | .266 | .219 |
| 1 (1.000) | 53 | 72 | 110 | 129 | 148 | 167 | 1.003 | 1.024 | 1.656 | .297 | .250 |
| 1-1/8(1.125) | 54 | ~ | 111 | 130 | 149 | 168 | 1.129 | 1.153 | 1.847 | .328 | .281 |
| 1-1/4(1.250) | 55 | ~ | 112 | 131 | 150 | 169 | 1.254 | 1.280 | 2.036 | .359 | .312 |
| 1-3/8(1.375) | 56 | ~ | 113 | 132 | 151 | 170 | 1.379 | 1.408 | 2.219 | .391 | .344 |
| 1-1/2(1.500) | 57 | ~ | 114 | 133 | 152 | 171 | 1.504 | 1.534 | 2.419 | .422 | .375 |

1/ SEE REQUIREMENT 4.

(L) DENOTES CHANGE(S)

INCH-POUND

| | | |
|---|---|---|
| PREPARING ACTIVITY: DLA - IS<br>CUSTODIANS: ARMY- AR NAVY- AS<br>AIR FORCE- 99 DLA-<br>REVIEW:AT, AV, ER, GL, MC, ME, MI, NS, 82<br>USER:<br>PROJECT NUMBER: 5310-1975 | MILITARY SPECIFICATION SHEET<br>TITLE<br>WASHER, LOCK-SPRING, HELICAL, REGULAR (MEDIUM) SERIES | SPECIFICATION SHEET NUMBER<br>MS35338 7 APR 94 REV L<br>SUPERSEDING<br>MS35338K 13 DEC 93 (SEE NOTE 2.)<br>AMSC- N/A FSC 5310 |
| DISTRIBUTION STATEMENT<br>A. Approved for public release; distribution is unlimited. | | Page 1 of 3 |

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202640-23T17:21Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: ASME B18.21.1

Form Approved
OMB No. 0704-0188

REQUIREMENTS:

1. MATERIAL

   a. STEEL, CARBON, GRADE 1060 (UNS G10600) THRU 1080 (UNS G10800), IN ACCORDANCE WITH ASTM A29.

   b. CORROSION-RESISTANT STEEL (NON-MAGNETIC) WASHERS SHALL BE TYPE 316 (UNS S31600) THRU 1/4 (.250) AND TYPE 300 SERIES (UNS S30200 TO UNS S31600) FOR ALL OTHER SIZES, AND CORROSION-RESISTANT STEEL (MAGNETIC) WASHERS SHALL BE TYPE 420 (UNS S42000).

   c. PHOSPHOR BRONZE, COPPER ALLOY NO 510 (UNS C51000) IN ACCORDANCE WITH ASTM B159.

   d. TIN-BRASS, COMPOSITION 425 (UNS C42500) IN ACCORDANCE WITH ASTM B591.

   e. NICKEL-COPPER-ALUMINUM ALLOY, FORM 2 (UNS N05500) IN ACCORDANCE WITH QQ-N-286.

2. *PROTECTIVE FINISHES:*

   a. CARBON STEEL WASHERS:

      1. PHOSPHATE COATING SHALL BE IN ACCORDANCE WITH MIL-P-16232 TYPE I, CLASS 2.

      2. CADMIUM PLATING SHALL BE IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 2, OR MIL-C-81562, TYPE II, CLASS 2.
      OR MECHANICALLY DEPOSITED ZINC SHALL BE IN ACCORDANCE WITH MIL-C-81562, TYPE II, CLASS 6.

   b. CORROSION-RESISTANT STEEL WASHERS:

      1. PASSIVATION SHALL BE IN ACCORDANCE WITH QQ-P-35.

      2. BLACK OXIDE COATING (FOR CRES 300 SERIES ONLY) SHALL BE IN ACCORDANCE WITH MIL-C-13924, CLASS 4. (SEE REQUIREMENT 6).

   c. PHOSPHOR BRONZE AND TIN-BRASS WASHERS SHALL BE CADMIUM PLATED IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 3. A MAGNET SHALL BE USED FOR DETECTION VERIFICATION PURPOSES TO DIFFERENTIATE BETWEEN CARBON STEEL WASHERS AND PHOSPHOR BRONZE AND TIN-BRASS WASHERS SPECIFIED HEREIN.

   d. NICKEL-COPPER-ALUMINUM ALLOY WASHERS - UNCOATED.

3. HARDNESS:

   a. CARBON STEEL WASHERS SHALL HAVE A HARDNESS OF 38 TO 46HRC.

   b. CORROSION-RESISTANT STEEL WASHERS TYPE 420 (UNS S42000) SHALL HAVE A HARDNESS OF 45-53HRC, AND TYPE 300 (UNS S3XXXX) SERIES WASHERS SHALL HAVE A HARDNESS OF 35-43HRC.

   (L) c. PHOSPHOR BRONZE AND TIN-BRASS WASHERS SHALL HAVE A MINIMUM HARDNESS OF 90HRB.

   d. NICKEL-COPPER-ALUMINUM ALLOY WASHERS SHALL HAVE A HARDNESS OF 33-40HRC.

4. MAXIMUM TOLERANCE FOR NOMINAL SERIES .086 THRU .190 SHALL BE +.006, .250 THRU .750 SHALL BE +.010 AND .875 THRU 1.500 SHALL BE +.020 (SEE TABLE I).

5. MAGNETIC PERMEABILITY: CORROSION-RESISTANT STEEL WASHERS (300 SERIES ONLY) SHALL HAVE A MAGNETIC PERMEABILITY OF 2.0 MAXIMUM (AIR = 1.0) FOR A FIELD STRENGTH OF H = 200 OERSTEDS USING A MAGNETIC INDICATOR IN ACCORDANCE WITH ASTM A342.

6. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC SPECIFICATION SHEET NUMBER FOLLOWED BY A DASH NUMBER TAKEN FROM TABLE I. WHEN BLACK OXIDE COATING IS REQUIRED, THE DASH NUMBER SHALL BE FOLLOWED BY THE LETTER "B".

   EXAMPLE: MS35338-48
   - 48 — DASH NUMBER
   - MS35338 — BASIC SPECIFICATION SHEET NUMBER

   MS35338-48 INDICATES - WASHER, LOCK-SPRING, HELICAL-SPRING, REGULAR (MEDIUM) SERIES, 1/2 (.500) NOMINAL DIAMETER, CARBON STEEL; CADMIUM OR ZINC PLATED

7. PACKAGING: PACKAGING SHALL BE IN ACCORDANCE WITH ASTM D3951.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.

2. MS35338 SUPERSEDES MS16214, MS35337, AN935, NAS1061, BECX1 AND BECX2, SEE TABLE II.

(L) 3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS DOCUMENT AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS DOCUMENT SHALL TAKE PRECEDENCE.

(L) 4. UNLESS OTHERWISE SPECIFIED, ISSUES OF REFERENCED DOCUMENTS ARE THOSE IN EFFECT AT THE TIME OF SOLICITATION.

| | | |
|---|---|---|
| PREPARING ACTIVITY: DLA - IS<br>CUSTODIANS: ARMY- AR NAVY- AS<br>AIR FORCE- 99 DLA-<br>REVIEW: AT, AV, ER, GL, MC, ME, MI, NS, 82<br>USER:<br>PROJECT NUMBER: 5310-1975 | MILITARY SPECIFICATION SHEET<br>TITLE<br>WASHER, LOCK-SPRING, HELICAL, REGULAR (MEDIUM) SERIES | SPECIFICATION SHEET NUMBER<br>MS35338 7 APR 94 REV L<br>SUPERSEDING<br>MS35338K 13 DEC 93 (SEE NOTE 2.)<br>AMSC- N/A FSC 5310 |
| DISTRIBUTION STATEMENT<br>A. Approved for public release; distribution is unlimited. | | Page 2 of 3 |

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202640-23T17:21Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: ASME B18.21.1

Form Approved
OMB No. 0704-0188

TABLE II. INTERCHANGEABILITY.

After 21 March 1966, (1) washers given on MS16214, MS35337, NAS1061, and this standard in part, are inactive for design and are canceled, but their existing stocks should be used for maintenance purposes until depleted and (2) washers are given on AN935 are inactivated for new design. Use only the following substitutive washers for new design and replacement.

| CROSS REFERENCE OF PART NUMBERS | | | | | | | |
|---|---|---|---|---|---|---|---|
| CANCELLED INACTIVATED | SUBSTITUTIVE | CANCELLED INACTIVATED | SUBSTITUTIVE | CANCELLED INACTIVATED | SUBSTITUTIVE | CANCELLED INACTIVATED | SUBSTITUTIVE |
| MS16214-1 | MS35338-135 | MS35337-37 | MS35338-56 | MS35337-108 | MS35338-108 | AN935-2 | MS35338-39 |
| MS16214-2 | MS35338-136 | MS35337-38 | MS35338-57 | MS35337-109 | MS35338-109 | AN935-3 | MS35338-1/ |
| MS16214-3 | MS35338-137 | MS35337-39 | MS35338-39 | MS35337-110 | MS35338-110 | AN935-4 | MS35338-40 |
| MS16214-4 | MS35338-138 | MS35337-40 | MS35338-40 | MS35337-111 | MS35338-111 | AN935-5 | MS35338-1/ |
| MS16214-5 | MS35338-139 | MS35337-41 | MS35338-41 | MS35337-112 | MS35338-112 | AN935-6 | MS35338-41 |
| MS16214-6 | MS35338-140 | MS35337-42 | MS35338-42 | MS35337-113 | MS35338-113 | AN935-8 | MS35338-42 |
| MS16214-7 | MS35338-141 | MS35337-43 | MS35338-43 | MS35337-114 | MS35338-114 | AN935-10 | MS35338-43 |
| MS16214-8 | MS35338-142 | MS35337-44 | MS35338-44 | | | AN935-12 | MS35338-1/ |
| MS16214-9 | MS35338-143 | MS35337-45 | MS35338-45 | MS35338-1 | MS35338-39 | AN935-416 | MS35338-44 |
| MS16214-10 | MS35338-145 | MS35337-46 | MS35338-46 | MS35338-2 | MS35338-40 | AN935-516 | MS35338-45 |
| MS16214-11 | MS35338-146 | MS35337-47 | S35338-47 | MS35338-3 | MS35338-41 | AN935-616 | MS35338-46 |
| MS16214-12 | MS35338-147 | MS35337-48 | MS35338-48 | MS35338-4 | MS35338-42 | AN935-716 | MS35338-47 |
| MS16214-13 | MS35338-148 | MS35337-49 | MS35338-49 | MS35338-5 | MS35338-43 | AN935-816 | MS35338-48 |
| MS16214-14 | MS35338-149 | MS35337-50 | MS35338-50 | MS35338-6 | MS35338-44 | AN935-916 | MS35338-49 |
| MS16214-15 | MS35338-150 | MS35337-51 | MS35338-51 | MS35338-7 | MS35338-45 | AN935-1016 | MS35338-50 |
| MS16214-16 | MS35338-151 | MS35337-52 | MS35338-52 | MS35338-8 | MS35338-46 | AN935-1216 | MS35338-51 |
| MS16214-17 | MS35338-152 | MS35337-53 | MS35338-53 | MS35338-9 | MS35338-47 | AN935-2L | MS35338-39 |
| MS16214-18 | MS35338- 97 | MS35337-54 | MS35338-54 | MS35338-10 | MS35338-48 | AN935-3L | MS35338-1/ |
| MS16214-19 | MS35338- 98 | MS35337-55 | MS35338-55 | MS35338-11 | MS35338-49 | AN935-4L | MS35338-40 |
| MS16214-20 | MS35338- 99 | MS35337-56 | MS35338-56 | MS35338-12 | MS35338-50 | AN935-5L | MS35338-1/ |
| MS16214-21 | MS35338-100 | MS35337-57 | MS35338-57 | MS35338-13 | MS35338-51 | AN935-6L | MS35338-41 |
| MS16214-22 | MS35338-101 | MS35337-58 | MS35338-58 | MS35338-14 | MS35338-52 | AN935-8L | MS35338-42 |
| MS16214-23 | MS35338-102 | MS35337-59 | MS35338-59 | MS35338-15 | MS35338-53 | AN935-10L | MS35338-43 |
| MS16214-24 | MS35338-103 | MS35337-60 | MS35338-60 | MS35338-16 | MS35338-54 | AN935-12L | MS35338-1/ |
| MS16214-25 | MS35338-104 | MS35337-61 | MS35338-61 | MS35338-17 | MS35338-55 | AN935-416L | MS35338-44 |
| MS16214-26 | MS35338-105 | MS35337-62 | MS35338-62 | MS35338-18 | MS35338-56 | AN935-516L | MS35338-45 |
| MS16214-27 | MS35338-107 | MS35337-63 | MS35338-63 | MS35338-19 | MS35338-57 | AN935-616L | MS35338-46 |
| MS16214-28 | MS35338-108 | MS35337-64 | MS35338-64 | MS35338-20 | MS35338-39 | AN935-716L | MS35338-47 |
| MS16214-29 | MS35338-109 | MS35337-65 | MS35338-65 | MS35338-21 | MS35338-40 | AN935-816L | MS35338-48 |
| MS16214-30 | MS35338-110 | MS35337-66 | MS35338-66 | MS35338-22 | MS35338-41 | AN935-916L | MS35338-49 |
| MS16214-31 | MS35338-111 | MS35337-67 | MS35338-67 | MS35338-23 | MS35338-42 | AN935-1016L | MS35338-50 |
| MS16214-32 | MS35338-112 | MS35337-68 | MS35338-68 | MS35338-24 | MS35338-43 | AN935-1216L | MS35338-51 |
| MS16214-33 | MS35338-113 | MS35337-69 | MS35338-69 | MS35338-25 | MS35338-44 | AN935-82 | MS35338-96 |
| MS16214-34 | MS35338-114 | MS35337-70 | MS35338-70 | MS35338-26 | MS35338-45 | AN935-83 | MS35338-1/ |
| | | MS35337-71 | MS35338-71 | MS35338-27 | MS35338-46 | AN935-84 | MS35338-97 |
| MS35337-1 | MS35338-39 | MS35337-72 | MS35338-72 | MS35338-28 | MS35338-47 | AN935-85 | MS35338-1/ |
| MS35337-2 | MS35338-40 | MS35337-73 | MS35338-54 | MS35338-29 | MS35338-48 | AN935-86 | MS35338-98 |
| MS35337-3 | MS35338-41 | MS35337-74 | MS35338-55 | MS35338-30 | MS35338-49 | AN935-88 | MS35338-99 |
| MS35337-4 | MS35338-42 | MS35337-75 | MS35338-56 | MS35338-31 | MS35338-50 | AN935-810 | MS35338-100 |
| MS35337-5 | MS35338-43 | MS35337-76 | MS35338-57 | MS35338-32 | MS35338-51 | AN935-812 | MS35338-1/ |
| MS35337-6 | MS35338-44 | MS35337-77 | MS35338-134 OR 153 | MS35338-33 | MS35338-52 | AN935-8416 | MS35338-101 |
| MS35337-7 | MS35338-45 | MS35337-78 | MS35338-135 OR 154 | MS35338-34 | MS35338-53 | AN935-8516 | MS35338-102 |
| MS35337-8 | MS35338-46 | MS35337-79 | MS35338-136 OR 155 | MS35338-35 | MS35338-54 | AN935-8616 | MS35338-103 |
| MS35337-9 | MS35338-47 | MS35337-80 | MS35338-137 OR 156 | MS35338-36 | MS35338-55 | AN935-8716 | MS35338-104 |
| MS35337-10 | MS35338-48 | MS35337-81 | MS35338-138 OR 157 | MS35338-37 | MS35338-56 | AN935-8816 | MS35338-105 |
| MS35337-11 | MS35338-49 | MS35337-82 | MS35338-139 OR 158 | MS35338-38 | MS35338-57 | AN935-8916 | MS35338-106 |
| MS35337-12 | MS35338-50 | MS35337-83 | MS35338-140 OR 159 | MS35338-73 | MS35338-54 | AN935-81016 | MS35338-107 |
| MS35337-13 | MS35338-51 | MS35337-84 | MS35338-141 OR 160 | MS35338-74 | MS35338-55 | AN935-81216 | MS35338-108 |
| MS35337-14 | MS35338-52 | MS35337-85 | MS35338-142 OR 161 | MS35338-75 | MS35338-56 | AN935-82L | MS35338- 96 |
| MS35337-15 | MS35338-53 | MS35337-86 | MS35338-143 OR 162 | MS35338-76 | MS35338-57 | AN935-83L | MS35338-1/ |
| MS35337-16 | MS35338-54 | MS35337-87 | MS35338-144 OR 163 | MS35338-77 | MS35338-134 OR 153 | AN935-84L | MS35338-97 |
| MS35337-17 | MS35338-55 | MS35337-88 | MS35338-145 OR 164 | MS35338-78 | MS35338-135 OR 154 | AN935-85L | MS35338-1/ |
| MS35337-18 | MS35338-56 | MS35337-89 | MS35338-146 OR 165 | MS35338-79 | MS35338-136 OR 155 | AN935-86L | MS35338-98 |
| MS35337-19 | MS35338-57 | MS35337-90 | MS35338-147 OR 166 | MS35338-80 | MS35338-137 OR 156 | AN935-88L | MS35338-99 |
| MS35337-20 | MS35338-39 | MS35337-91 | MS35338-148 OR 167 | MS35338-81 | MS35338-138 OR 157 | AN935-810L | MS35338-100 |
| MS35337-21 | MS35338-40 | MS35337-92 | MS35338-149 OR 168 | MS35338-82 | MS35338-139 OR 158 | AN935-812L | MS35338-1/ |
| MS35337-22 | MS35338-41 | MS35337-93 | MS35338-150 OR 169 | MS35338-83 | MS35338-140 OR 159 | AN935-8416L | MS35338-101 |
| MS35337-23 | MS35338-42 | MS35337-94 | MS35338-151 OR 170 | MS35338-84 | MS35338-141 OR 160 | AN935-8516L | MS35338-102 |
| MS35337-24 | MS35338-43 | MS35337-95 | MS35338-152 OR 171 | MS35338-85 | MS35338-142 OR 161 | AN935-8616L | MS35338-103 |
| MS35337-25 | MS35338-44 | MS35337-96 | MS35338-96 | MS35338-86 | MS35338-143 OR 162 | AN935-8716L | MS35338-104 |
| MS35337-26 | MS35338-45 | MS35337-97 | MS35338-97 | MS35338-87 | MS35338-144 OR 163 | AN935-8816L | MS35338-105 |
| MS35337-27 | MS35338-46 | MS35337-98 | MS35338-98 | MS35338-88 | MS35338-145 OR 164 | AN935-8916L | MS35338-106 |
| MS35337-28 | MS35338-47 | MS35337-99 | MS35338-99 | MS35338-89 | MS35338-146 OR 165 | AN935-81016L | MS35338-107 |
| MS35337-29 | MS35338-48 | MS35337-100 | MS35338-100 | MS35338-90 | MS35338-147 OR 166 | AN935-81216L | MS35338-108 |
| MS35337-30 | MS35338-49 | MS35337-101 | MS35338-101 | MS35338-91 | MS35338-148 OR 167 | | |
| MS35337-31 | MS35338-50 | MS35337-102 | MS35338-102 | MS35338-92 | MS35338-149 OR 168 | NAS1061-6 | MS35338-136 |
| MS35337-32 | MS35338-51 | MS35337-103 | MS35338-103 | MS35338-93 | MS35338-150 OR 169 | NAS1061-10 | MS35338-138 |
| MS35337-33 | MS35338-52 | MS35337-104 | MS35338-104 | MS35338-94 | MS35338-151 OR 170 | NAS1061-416 | MS35338-139 |
| MS35337-34 | MS35338-53 | MS35337-105 | MS35338-105 | MS35338-95 | MS35338-152 OR 171 | NAS1061-516 | MS35338-140 |
| MS35337-35 | MS35338-54 | MS35337-106 | MS35338-106 | | | NAS1061-616 | MS35338-141 |
| MS35337-36 | MS35338-55 | MS35337-107 | MS35338-107 | | | | |

1/ No replacement.

| | | |
|---|---|---|
| PREPARING ACTIVITY: DLA - IS<br>CUSTODIANS: ARMY- AR NAVY- AS<br>AIR FORCE- 99 DLA-<br>REVIEW:AT, AV, ER, GL, MC, ME, MI, NS, 82<br>USER:<br>PROJECT NUMBER: 5310-1975 | MILITARY SPECIFICATION SHEET<br>TITLE<br>WASHER, LOCK-SPRING, HELICAL, REGULAR (MEDIUM) SERIES | SPECIFICATION SHEET NUMBER<br>MS35338 7 APR 94 REV L<br>SUPERSEDING<br>MS35338K 13 DEC 93 (SEE NOTE 2.)<br>AMSC- N/A FSC 5310 |

DISTRIBUTION STATEMENT
A. Approved for public release; distribution is unlimited.



DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:21Z
Check the source to verify that this is the current version before use.