FEDERAL SPECIFICATION SHEET

FILTER, RADIO FREQUENCY INTERFERENCE

This specification was approved by the Assistant Administrator, Office of Federal Supply and Services, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the filters described herein shall consist of this document and the latest issue of W-F-2190/GEN.


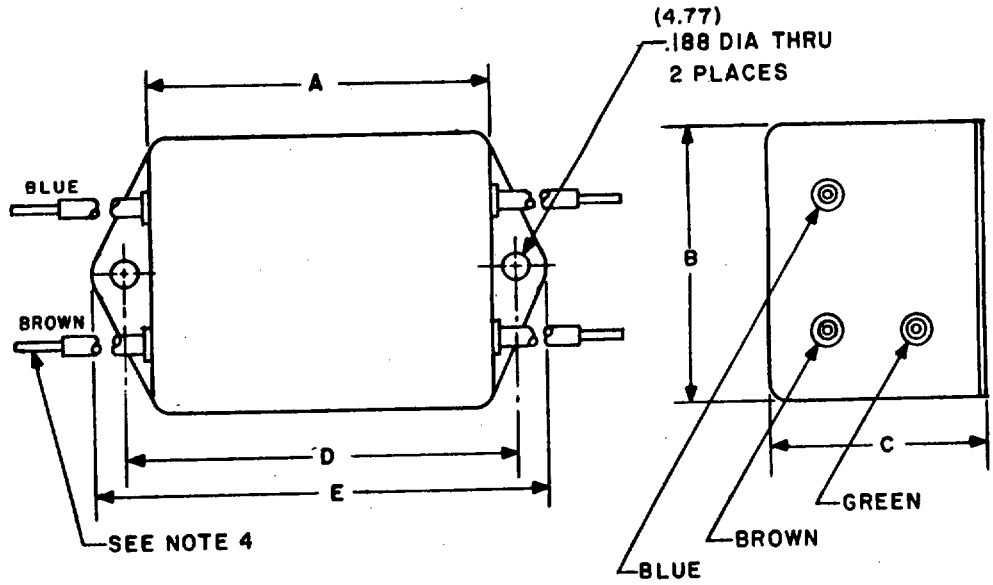


FIGURE 1. Case dimensions and electrical schematics.

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

Part number WF2190/9	Maximum dimensions									
	A		B		C		D		E	
	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
-01	2.06	52.3	1.75	44.4	1.13	28.7	2.38	60.4	2.78	70.61
-02	2.06	52.3	1.75	44.4	1.13	28.7	2.38	60.4	2.78	70.61
-03	2.56	65.0	2.00	50.8	1.13	28.7	2.94	74.7	3.32	84.3
-04	2.56	65.0	2.00	50.8	1.13	28.7	2.94	74.7	3.32	84.3
-05	2.56	65.0	2.00	50.8	1.50	38.1	2.94	74.7	3.32	84.3

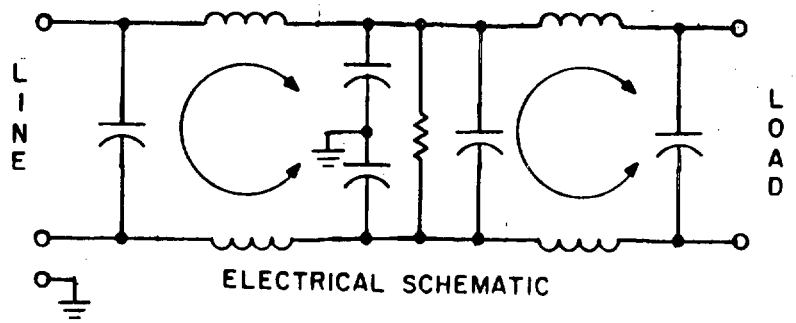

ELECTRICAL SCHEMATIC

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Millimeters are in parenthesis.
4. Wire leads shall be 4.0 inches minimum length #20 AWG wire minimum and shall be the color indicated.

FIGURE 1. Case dimensions and electrical schematics - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimension and electrical schematics: See figure 1.

Operating temperature range: 0°C to +65°C.

Maximum leakage current: As measured from either of the two input or output lines to the filter case, the maximum permissible leakage current shall not exceed 0.65 mA at 125 volts, 60 Hz or 1.25 mA at 250 volts, 50 Hz.

Voltage rating:

Rated at 125 volts, ac, over the frequency range of 0 to 400 Hz.

Rated at 250 volts, ac, over the frequency range of 0 to 60 Hz.

Rated current: See table I.

Insertion loss: In accordance with MIL-STD-220 and table I.

Part number: Shall be in accordance with table I and figure 1.

Substitution data: Filters covered by this specification replace commercial part numbers as specified in table II.

TABLE I. Current ratings and insertion loss.

Part number WF2190/9	Current rating (amperes per line)	Minimum no-load insertion loss (dB) at +25°C in accordance with MIL-STD-220				
		.15 MHz	.20 MHz	.50 MHz	10 MHz	20 MHz
-01	1	40	45	65	65	65
-02	2	15	25	55	"	"
-03	3	40	45	65	"	"
-04	5	15	25	55	"	"
-05	10	15	25	55	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

TABLE II. Substitution data. 1/ 2/

Part number WF2190/9	FSCM					
	73631	05245	23880	56289	93790	02777
	Vendor part number					
-01	F1300BB01	1R3	HP3-1	1JX5301C	APF131W	F85071
-02	F1300BB03	2R3	---	2JX5302C	APF231W	F85075
-03	F1300BB03	3R3	HP3-3	3JX5303C	APF331W	F85079
-04	F1300BB06	5R3	HP3-5	5JX5304C	APF531W	F85083
-05	F1300BB10	10R3	HP3-10	10JX5305C	APF1031W	F85087

TABLE II. Substitution data 1/ 2/ - Continued.

Part number WF2190/9	FSCM				
	13050	19130	96733	96733	12294
	Vendor part number				
-01	620C1	RNF-1T13	F2R013	F2K013	9679-101-9151
-02	620C2	RNF-2T13	F2R023	F2K023	9679-101-9161
-03	620C3	RNF-3T13	F2R033	F2K033	9679-101-9152
-04	620C5	RNF-5T13	F2R053	F2K053	9679-101-9162
-05	620C10	RNF-10T13	F2R103	F2K103	9679-101-9153

1/ Set of vendor part numbers is not necessarily complete. Additional vendor part numbers will be added as they become available.

2/ CAUTION. Do not use the vendor part number for item procurement. The similar vendor part number may not satisfy the performance requirements specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians

Army - ER
Navy - EC
Air Force - 85

Review Activities

Army - AR, MI
Navy - SH
Air Force - 11, 17, 99

User Activities

Army - AT, AV, ME
Navy - AS, MC, OS, YD
Air Force - 19

CIVIL AGENCY COORDINATING ACTIVITIES:

GSA - FSS
NCS -
NASA - MSF, LRC, JFK

PREPARING ACTIVITY:

DLA - ES

DOD project 5915-0271-9

U.S. GOVERNMENT PRINTING OFFICE : 1984 - 421-595/3692

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.