INCH-POUND


MIL-C-15370/17A
22 September 1989
SUPERSEDING
MIL-C-15370/17
22 October 1979

MILITARY SPECIFICATION SHEET

COUPLER, DIRECTIONAL, DUAL (COAXIAL, SMA CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-15370.

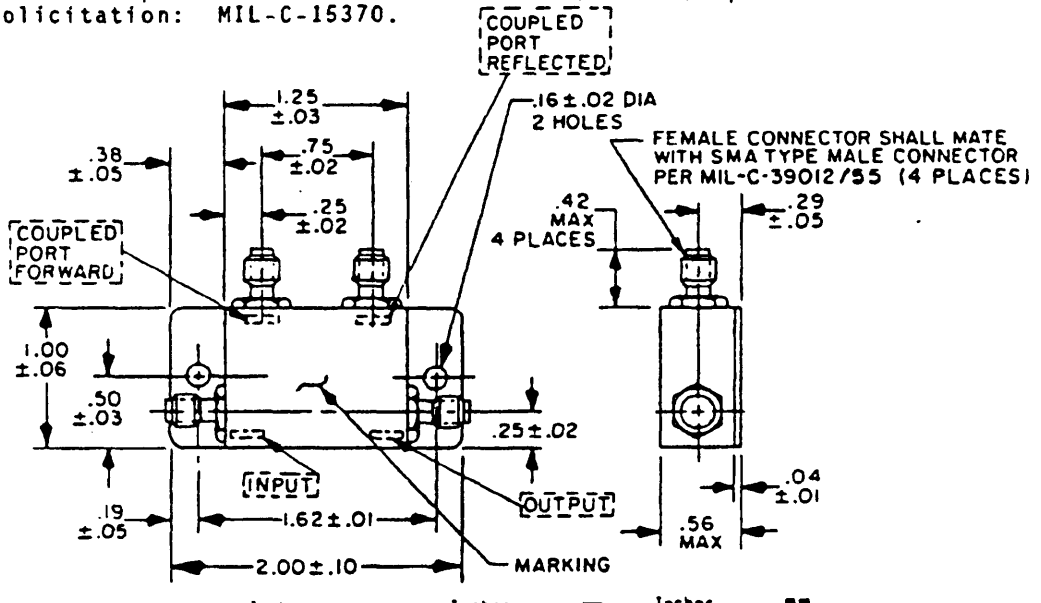

Inches	mm	Inches	mm	Inches	mm
.01	0.3	.16	4.1	.56	14.2
.02	0.5	.19	4.8	.75	19.0
.03	0.8	.25	6.4	1.00	25.4
.04	1.0	.29	7.4	1.25	31.8
.05	1.3	.38	9.7	1.62	41.1
.06	1.5	.42	10.7	2.00	50.8
.10	2.5	.50	12.7		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.

FIGURE 1. Dimensions and configuration.

(A) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction, and physical dimensions: See figure 1.

Operating temperature range: -18°C to +85°C.

Nonoperating temperature range: -57°C to +85°C.

Frequency range: 60 to 80 MHz.

Coupling: 10 dB ±1 dB.

Effective directivity (min): 20 dB.

Frequency sensitivity: ±0.5 dB.

VSWR: 1.3:1 max.

Characteristic impedance:

Primary line: 75 ohms.
Secondary line: 50 ohms.

Insertion loss (exclusive of the coupling loss) (max): 0.5 dB.

Power rating (average): 5 watts.

Shock (specified pulse): MIL-STD-202, method 213, test condition A.

Marking: See figure 1.

(A) Part number: M15370/17-001 S or N.

NOTE: Directional couplers covered by this specification sheet are substitutable for the manufacturer's part numbers specified in table I. This information in no way implies that the manufacturer's part number or NSN is suitable for the military part number.

TABLE I. Substitution data.

(A)

Part number M15370/17-	Manufacturer's code	Manufacturer's part number	NSN 5985
001	49956	979802-1	01-158-9170
001	12457	CRM-10-70/23008	01-158-9170
001	32252	0-D4-10-2018	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, OS
Air Force - 11, 99
DLA - ES

User activities:
Navy - CG, MC, SH

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-1003-14)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:12Z
Check the source to verify that this is the current version before use.