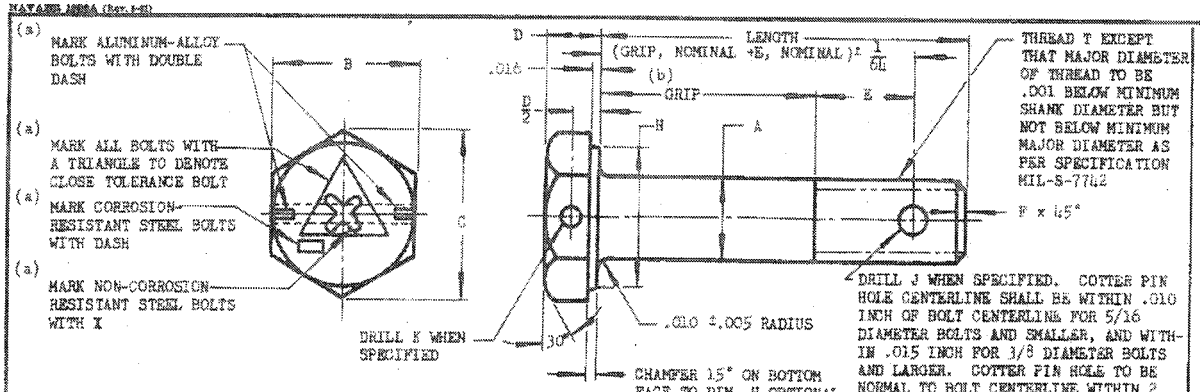


BASIC AN PART NO.	THREAD T	A DIA MAX	A DIA MIN	B MAX	B MIN	C REF	D MAX	D MIN	E REF	F MAX	F MIN	(3)(d) H DIA MIN	J DRILL DIA +.010 -.000	K DRILL DIA +.010 -.000
AN173	NO. 10-32 NF-3A	.1894	.1589	.377	.365	.430	.141	.109	17/64	.047	.015	.359	.070	.046
AN174	1/4 -28 UNF-3A	.2492	.2487	.440	.428	.510	.172	.140	5/16	.047	.015	.422	.076	.046
AN175	5/16-24 UNF-3A	.3117	.3112	.502	.490	.580	.204	.172	23/64	.063	.031	.484	.076	.070
AN176	3/8 -24 UNF-3A	.3742	.3737	.565	.553	.650	.235	.203	7/16	.063	.031	.547	.106	.070
AN177	7/16-20 UNF-3A	.4367	.4362	.627	.615	.720	.266	.234	31/64	.063	.031	.609	.106	.070
AN178	1/2 -20 UNF-3A	.4991	.4986	.752	.740	.870	.297	.265	39/64	.063	.031	.734	.106	.070
AN179	9/16-18 UNF-3A	.5616	.5611	.877	.865	1.010	.328	.296	21/32	.078	.046	.859	.141	.070
AN180	5/8 -18 UNF-3A	.6240	.6234	.940	.928	1.090	.360	.328	47/64	.078	.046	.922	.141	.070
AN182	3/4 -16 UNF-3A	.7488	.7481	1.066	1.053	1.230	.422	.390	7/8	.078	.046	1.047	.141	.070
AN184	7/8 -14 UNF-3A	.8737	.8729	1.253	1.240	1.440	.485	.453	63/64	.094	.062	1.236	.141	.070
AN186	1 -14 NF-3A	.9985	.9975	1.441	1.428	1.660	.547	.515	1- 3/32	.094	.062	1.422	.141	.070

(3) SEE SHEET 3 FOR NOTES (a), (b), AND (c).


(3) (d) THE DIAMETER OF THE WASHER FACE SHALL NOT EXCEED THE ACTUAL WIDTH ACROSS FLATS.

MATERIAL: NON-CORROSION-RESISTANT STEEL, CORROSION-RESISTANT STEEL, OR ALUMINUM ALLOY. SEE PROCUREMENT SPECIFICATION

(3) FINISH: SEE PROCUREMENT SPECIFICATION, EXCEPT AS NOTED.
PLATING MAY BE GROUND OFF SHANK OR UNDERSIDE OF HEAD. SMALL AREAS OF CADMIUM PLATING REMAINING ON THE GROUND PORTION OF BOLTS SHALL NOT BE CAUSE FOR REJECTION. UNPLATED SURFACES SHALL BE COATED WITH COMPOUND, SPECIFICATION MIL-C-11796 OR MIL-C-16173. SURFACE ROUGHNESS IN RMS MICRO INCHES BEFORE PLATING SHALL BE: 63 MAX FOR SHANK AND UNDERSIDE OF HEAD, 125 MAX FOR THREADS (VISUAL COMPARISON ONLY), 250 MAX FOR ALL OTHER AREAS (VISUAL COMPARISON ONLY).

ADD C BEFORE DASH NUMBER FOR CORROSION-RESISTANT STEEL BOLT. (SEE (c) NOTE.)
ADD DD BEFORE DASH NUMBER FOR ALUMINUM-ALLOY BOLT. (SEE (c) NOTE.)
ADD A AFTER DASH NUMBER FOR UNDRILLED BOLT. SEE ILLUSTRATION.
ADD H BEFORE DASH NUMBER FOR BOLT WITH DRILLED HEAD AND SHANK. SEE ILLUSTRATION.
ADD H BEFORE DASH NUMBER AND A AFTER DASH NUMBER FOR BOLT WITH DRILLED HEAD ONLY. SEE ILLUSTRATION

EXAMPLES OF PART NUMBERS:
AN176-10 = 3/8 NON-CORROSION-RESISTANT STEEL BOLT 1-5/64 LONG, 7/16 GRIP WITH DRILLED SHANK ONLY. SEE ILLUSTRATION.
AN176C10 = 3/8 CORROSION-RESISTANT STEEL BOLT 1-5/64 LONG, 7/16 GRIP WITH DRILLED SHANK ONLY. SEE ILLUSTRATION. (SEE (c) NOTE.)
AN176DD10 = 3/8 ALUMINUM-ALLOY BOLT 1-5/64 LONG, 7/16 GRIP WITH DRILLED SHANK ONLY. SEE ILLUSTRATION. (SEE (c) NOTE.)
AN176DD10A = 3/8 ALUMINUM-ALLOY BOLT 1-5/64 LONG, 7/16 GRIP, UNDRILLED SHANK AND HEAD. SEE ILLUSTRATION. (SEE (c) NOTE.)
AN176DDH10 = 3/8 ALUMINUM-ALLOY BOLT 1-5/64 LONG, 7/16 GRIP WITH DRILLED HEAD AND SHANK. SEE ILLUSTRATION. (SEE (c) NOTE.)
AN176DDH10A = 3/8 ALUMINUM-ALLOY BOLT 1-5/64 LONG, 7/16 GRIP WITH DRILLED HEAD ONLY. SEE ILLUSTRATION. (SEE (c) NOTE.)

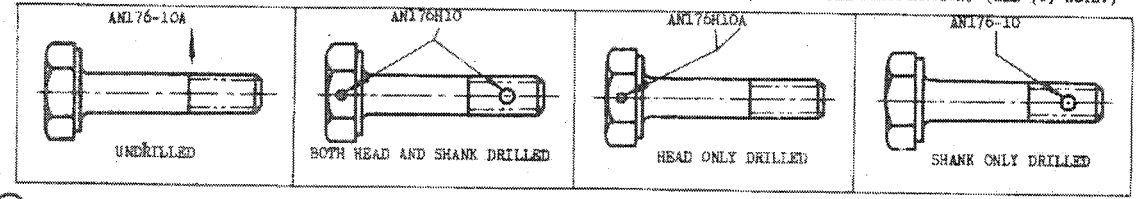

(3) BOLTS SHALL BE FREE FROM ALL HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE. COUNTERSINKING OF DRILLED HOLES IN HEAD IS MANDATORY. COUNTERSINKING OF DRILLED HOLES IN SHANK IS OPTIONAL.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±5°.

APPROVED 29 Mar 49 REVISED (1) 24 Mar 52 (2) 30 Oct 52 (3) 15 Mar 55

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new designs, not later than 6 months after the latest date of approval shown.

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN173 THRU AN186
MIL-B-6812	BOLT - MACHINE, CLOSE TOLERANCE, AIRCRAFT	SHEET 1 OF 4

SUPERSEDES USAF DRAWINGS 83 THROUGH 96 AND NAS DRAWINGS 53 THROUGH 66.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:14Z
Check the source to verify that this is the current version before use.

DASH NO.	AN173 GRIP ±1/64	AN173 LENGTH +1/32 -1/64	AN174 GRIP ±1/64	AN174 LENGTH +1/32 -1/64	AN175 GRIP ±1/64	AN175 LENGTH +1/32 -1/64	AN176 GRIP ±1/64	AN176 LENGTH +1/32 -1/64	AN177 GRIP ±1/64	AN177 LENGTH +1/32 -1/64	AN178 GRIP ±1/64	AN178 LENGTH +1/32 -1/64	AN179 GRIP ±1/64	AN179 LENGTH +1/32 -1/64
3	1/16	15/32	1/16	15/32										
4	1/8	17/32	1/16	17/32	1/16	19/32								
5	1/4	21/32	3/16	21/32	3/16	23/32	1/16	45/64	1/16	23/32				
6	3/8	25/32	5/16	25/32	5/16	27/32	3/16	53/64	3/16	27/32	1/16	27/32	1/16	31/32
7	1/2	29/32	7/16	29/32	7/16	31/32	5/16	61/64	5/16	31/32	3/16	31/32	1/8	1- 1/32
10	5/8	1- 1/32	9/16	1- 1/32	9/16	1- 3/32	7/16	1- 5/64	7/16	1- 3/32	5/16	1- 3/32	1/4	1- 5/32
11	3/4	1- 5/32	11/16	1- 5/32	11/16	1- 7/32	9/16	1-13/64	9/16	1- 7/32	7/16	1- 7/32	3/8	1- 9/32
12	7/8	1- 9/32	13/16	1- 9/32	13/16	1-11/32	11/16	1-21/64	11/16	1-11/32	9/16	1-11/32	1/2	1-13/32
13	1	1-13/32	15/16	1-13/32	15/16	1-15/32	13/16	1-29/64	13/16	1-15/32	11/16	1-15/32	5/8	1-17/32
14	1-1/8	1-17/32	1- 1/16	1-17/32	1- 1/16	1-19/32	15/16	1-37/64	15/16	1-19/32	13/16	1-19/32	3/4	1-21/32
15	1-1/4	1-21/32	1- 3/16	1-21/32	1- 3/16	1-23/32	1- 1/16	1-45/64	1- 1/16	1-23/32	15/16	1-23/32	7/8	1-25/32
16	1-3/8	1-25/32	1- 5/16	1-25/32	1- 5/16	1-27/32	1- 3/16	1-53/64	1- 3/16	1-27/32	1- 1/16	1-27/32	1	1-29/32
17	1-1/2	1-29/32	1- 7/16	1-29/32	1- 7/16	1-31/32	1- 5/16	1-61/64	1- 5/16	1-31/32	1- 3/16	1-31/32	1-1/8	2- 1/32
20	1-5/8	2- 1/32	1- 9/16	2- 1/32	1- 9/16	2- 3/32	1- 7/16	2- 5/64	1- 7/16	2- 3/32	1- 5/16	2- 3/32	1-1/4	2- 5/32
21	1-3/4	2- 5/32	1-11/16	2- 5/32	1-11/16	2- 7/32	1- 9/16	2-13/64	1- 9/16	2- 7/32	1- 7/16	2- 7/32	1-3/8	2- 9/32
22	1-7/8	2- 9/32	1-13/16	2- 9/32	1-13/16	2-11/32	1-11/16	2-21/64	1-11/16	2-11/32	1- 9/16	2-11/32	1-1/2	2-13/32
23	2	2-13/32	1-15/16	2-13/32	1-15/16	2-15/32	1-13/16	2-29/64	1-13/16	2-15/32	1-11/16	2-15/32	1-5/8	2-17/32
24	2-1/8	2-17/32	2- 1/16	2-17/32	2- 1/16	2-19/32	1-15/16	2-37/64	1-15/16	2-19/32	1-13/16	2-19/32	1-3/4	2-21/32
25	2-1/4	2-21/32	2- 3/16	2-21/32	2- 3/16	2-23/32	2- 1/16	2-45/64	2- 1/16	2-23/32	1-15/16	2-23/32	1-7/8	2-25/32
26	2-3/8	2-25/32	2- 5/16	2-25/32	2- 5/16	2-27/32	2- 3/16	2-53/64	2- 3/16	2-27/32	2- 1/16	2-27/32	2	2-29/32
27	2-1/2	2-29/32	2- 7/16	2-29/32	2- 7/16	2-31/32	2- 5/16	2-61/64	2- 5/16	2-31/32	2- 3/16	2-31/32	2-1/8	3- 1/32
30	2-5/8	3- 1/32	2- 9/16	3- 1/32	2- 9/16	3- 3/32	2- 7/16	3- 5/64	2- 7/16	3- 3/32	2- 5/16	3- 3/32	2-1/4	3- 5/32
31	2-3/4	3- 5/32	2-11/16	3- 5/32	2-11/16	3- 7/32	2- 9/16	3-13/64	2- 9/16	3- 7/32	2- 7/16	3- 7/32	2-3/8	3- 9/32
32	2-7/8	3- 9/32	2-13/16	3- 9/32	2-13/16	3-11/32	2-11/16	3-21/64	2-11/16	3-11/32	2- 9/16	3-11/32	2-1/2	3-13/32
33	3	3-13/32	2-15/16	3-13/32	2-15/16	3-15/32	2-13/16	3-29/64	2-13/16	3-15/32	2-11/16	3-15/32	2-5/8	3-17/32
34	3-1/8	3-17/32	3- 1/16	3-17/32	3- 1/16	3-19/32	2-15/16	3-37/64	2-15/16	3-19/32	2-13/16	3-19/32	2-3/4	3-21/32
35	3-1/4	3-21/32	3- 3/16	3-21/32	3- 3/16	3-23/32	3- 1/16	3-45/64	3- 1/16	3-23/32	2-15/16	3-23/32	2-7/8	3-25/32
36	3-3/8	3-25/32	3- 5/16	3-25/32	3- 5/16	3-27/32	3- 3/16	3-53/64	3- 3/16	3-27/32	3- 1/16	3-27/32	3	3-29/32
37	3-1/2	3-29/32	3- 7/16	3-29/32	3- 7/16	3-31/32	3- 5/16	3-61/64	3- 5/16	3-31/32	3- 3/16	3-31/32	3-1/8	4- 1/32
40	3-5/8	4- 1/32	3- 9/16	4- 1/32	3- 9/16	4- 3/32	3- 7/16	4- 5/64	3- 7/16	4- 3/32	3- 5/16	4- 3/32	3-1/4	4- 5/32
41	3-3/4	4- 5/32	3-11/16	4- 5/32	3-11/16	4- 7/32	3- 9/16	4-13/64	3- 9/16	4- 7/32	3- 7/16	4- 7/32	3-3/8	4- 9/32
42	3-7/8	4- 9/32	3-13/16	4- 9/32	3-13/16	4-11/32	3-11/16	4-21/64	3-11/16	4-11/32	3- 9/16	4-11/32	3-1/2	4-13/32
43	4	4-13/32	3-15/16	4-13/32	3-15/16	4-15/32	3-13/16	4-29/64	3-13/16	4-15/32	3-11/16	4-15/32	3-5/8	4-17/32
44	4-1/8	4-17/32	4- 1/16	4-17/32	4- 1/16	4-19/32	3-15/16	4-37/64	3-15/16	4-19/32	3-13/16	4-19/32	3-3/4	4-21/32
45	4-1/4	4-21/32	4- 3/16	4-21/32	4- 3/16	4-23/32	4- 1/16	4-45/64	4- 1/16	4-23/32	3-15/16	4-23/32	3-7/8	4-25/32
46	4-3/8	4-25/32	4- 5/16	4-25/32	4- 5/16	4-27/32	4- 3/16	4-53/64	4- 3/16	4-27/32	4- 1/16	4-27/32	4	4-29/32
47	4-1/2	4-29/32	4- 7/16	4-29/32	4- 7/16	4-31/32	4- 5/16	4-61/64	4- 5/16	4-31/32	4- 3/16	4-31/32	4-1/8	5- 1/32
50	4-5/8	5- 1/32	4- 9/16	5- 1/32	4- 9/16	5- 3/32	4- 7/16	5- 5/64	4- 7/16	5- 3/32	4- 5/16	5- 3/32	4-1/4	5- 5/32
51	4-3/4	5- 5/32	4-11/16	5- 5/32	4-11/16	5- 7/32	4- 9/16	5-13/64	4- 9/16	5- 7/32	4- 7/16	5- 7/32	4-3/8	5- 9/32
52	4-7/8	5- 9/32	4-13/16	5- 9/32	4-13/16	5-11/32	4-11/16	5-21/64	4-11/16	5-11/32	4- 9/16	5-11/32	4-1/2	5-13/32
53	5	5-13/32	4-15/16	5-13/32	4-15/16	5-15/32	4-13/16	5-29/64	4-13/16	5-15/32	4-11/16	5-15/32	4-5/8	5-17/32
54	5-1/8	5-17/32	5- 1/16	5-17/32	5- 1/16	5-19/32	4-15/16	5-37/64	4-15/16	5-19/32	4-13/16	5-19/32	4-3/4	5-21/32
55	5-1/4	5-21/32	5- 3/16	5-21/32	5- 3/16	5-23/32	5- 1/16	5-45/64	5- 1/16	5-23/32	4-15/16	5-23/32	4-7/8	5-25/32
56	5-3/8	5-25/32	5- 5/16	5-25/32	5- 5/16	5-27/32	5- 3/16	5-53/64	5- 3/16	5-27/32	5- 1/16	5-27/32	5	5-29/32
57	5-1/2	5-29/32	5- 7/16	5-29/32	5- 7/16	5-31/32	5- 5/16	5-61/64	5- 5/16	5-31/32	5- 3/16	5-31/32	5-1/8	6- 1/32
60	5-5/8	6- 1/32	5- 9/16	6- 1/32	5- 9/16	6- 3/32	5- 7/16	6- 5/64	5- 7/16	6- 3/32	5- 5/16	6- 3/32	5-1/4	6- 5/32
61	5-3/4	6- 5/32	5-11/16	6- 5/32	5-11/16	6- 7/32	5- 9/16	6-13/64	5- 9/16	6- 7/32	5- 7/16	6- 7/32	5-3/8	6- 9/32
62	5-7/8	6- 9/32	5-13/16	6- 9/32	5-13/16	6-11/32	5-11/16	6-21/64	5-11/16	6-11/32	5- 9/16	6-11/32	5-1/2	6-13/32
63	6	6-13/32	5-15/16	6-13/32	5-15/16	6-15/32	5-13/16	6-29/64	5-13/16	6-15/32	5-11/16	6-15/32	5-5/8	6-17/32
64	6-1/8	6-17/32	6- 1/16	6-17/32	6- 1/16	6-19/32	5-15/16	6-37/64	5-15/16	6-19/32	5-13/16	6-19/32	5-3/4	6-21/32
65	6-1/4	6-21/32	6- 3/16	6-21/32	6- 3/16	6-23/32	6- 1/16	6-45/64	6- 1/16	6-23/32	5-15/16	6-23/32	5-7/8	6-25/32
66	6-3/8	6-25/32	6- 5/16	6-25/32	6- 5/16	6-27/32	6- 3/16	6-53/64	6- 3/16	6-27/32	6- 1/16	6-27/32	6	6-29/32
67	6-1/2	6-29/32	6- 7/16	6-29/32	6- 7/16	6-31/32	6- 5/16	6-61/64	6- 5/16	6-31/32	6- 3/16	6-31/32	6-1/8	7- 1/32
70	6-5/8	7- 1/32	6- 9/16	7- 1/32	6- 9/16	7- 3/32	6- 7/16	7- 5/64	6- 7/16	7- 3/32	6- 5/16	7- 3/32	6-1/4	7- 5/32
71	6-3/4	7- 5/32	6-11/16	7- 5/32	6-11/16	7- 7/32	6- 9/16	7-13/64	6- 9/16	7- 7/32	6- 7/16	7- 7/32	6-3/8	7- 9/32
72	6-7/8	7- 9/32	6-13/16	7- 9/32	6-13/16	7-11/32	6-11/16	7-21/64	6-11/16	7-11/32	6- 9/16	7-11/32	6-1/2	7-13/32
73	7	7-13/32	6-15/16	7-13/32	6-15/16	7-15/32	6-13/16	7-29/64	6-13/16	7-15/32	6-11/16	7-15/32	6-5/8	7-17/32
74	7-1/8	7-17/32	7- 1/16	7-17/32	7- 1/16	7-19/32	6-15/16	7-37/64	6-15/16	7-19/32	6-13/16	7-19/32	6-3/4	7-21/32
75	7-1/4	7-21/32	7- 3/16	7-21/32	7- 3/16	7-23/32	7- 1/16	7-45/64	7- 1/16	7-23/32	6-15/16	7-23/32	6-7/8	7-25/32
76	7-3/8	7-25/32	7- 5/16	7-25/32	7- 5/16	7-27/32	7- 3/16	7-53/64	7- 3/16	7-27/32	7- 1/16	7-27/32	7	7-29/32
77	7-1/2	7-29/32	7- 7/16	7-29/32	7- 7/16	7-31/32	7- 5/16	7-61/64	7- 5/16	7-31/32	7- 3/16	7-31/32	7-1/8	8- 1/32
80	7-5/8	8- 1/32	7- 9/16	8- 1/32	7- 9/16	8- 3/32	7- 7/16	8- 5/64	7- 7/16	8- 3/32	7- 5/16	8- 3/32	7-1/4	8- 5/32
81					7-11/16	8- 7/32					7- 7/16	8- 7/32		
82											7- 9/16	8-11/32		
83											7-11/16	8-15/32		
84											7-13/16	8-19/32		
85							8- 1/16	8-45/64			7-15/16	8-23/32		
86											8- 1/16	8-27/32		
87											8- 3/16	8-31/32		

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown. It may be put into effect, however, at an earlier date after promulgation.

APPROVED 29 Mar 49 REVISED

PROCUREMENT SPECIFICATION

AN-B-5

AIR FORCE-NAVY AERONAUTICAL STANDARD

BOLT-AIRCRAFT, CLOSE TOLERANCE

AN173 THRU AN186

SHEET 2 OF 3 SHEETS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:14Z
Check the source to verify that this is the current version before use.

DASH NO.	AN170		AN182		AN184		AN186	
	GRIP ±1/64	LENGTH +1/32 -1/64	GRIP ±1/64	LENGTH +1/32 -1/64	GRIP ±1/64	LENGTH +1/32 -1/64	GRIP ±1/64	LENGTH +1/32 -1/64
7	1/16	1- 1/64						
10	3/16	1- 9/64	1/16	1- 5/32				
11	5/16	1-17/64	3/16	1- 9/32	1/16	1- 5/16		
12	7/16	1-25/64	5/16	1-13/32	3/16	1- 7/16	1/8	1-1/2
13	9/16	1-33/64	7/16	1-17/32	5/16	1- 9/16	1/4	1-5/8
14	11/16	1-41/64	9/16	1-21/32	7/16	1-11/16	3/8	1-3/4
15	13/16	1-49/64	11/16	1-25/32	9/16	1-13/16	1/2	1-7/8
16	15/16	1-57/64	13/16	1-29/32	11/16	1-15/16	5/8	2
17	1- 1/16	2- 1/64	15/16	2- 1/32	13/16	2- 1/16	3/4	2-1/8
20	1- 3/16	2- 9/64	1- 1/16	2- 5/32	15/16	2- 3/16	7/8	2-1/4
21	1- 5/16	2-17/64	1- 3/16	2- 9/32	1- 1/16	2- 5/16	1	2-3/8
22	1- 7/16	2-25/64	1- 5/16	2-13/32	1- 3/16	2- 7/16	1-1/8	2-1/2
23	1- 9/16	2-33/64	1- 7/16	2-17/32	1- 5/16	2- 9/16	1-1/4	2-5/8
24	1-11/16	2-41/64	1- 9/16	2-21/32	1- 7/16	2-11/16	1-3/8	2-3/4
25	1-13/16	2-49/64	1-11/16	2-25/32	1- 9/16	2-13/16	1-1/2	2-7/8
26	1-15/16	2-57/64	1-13/16	2-29/32	1-11/16	2-15/16	1-5/8	3
27	2- 1/16	3- 1/64	1-15/16	3- 1/32	1-13/16	3- 1/16	1-3/4	3-1/8
30	2- 3/16	3- 9/64	2- 1/16	3- 5/32	1-15/16	3- 3/16	1-7/8	3-1/4
31	2- 5/16	3-17/64	2- 3/16	3- 9/32	2- 1/16	3- 5/16	2	3-3/8
32	2- 7/16	3-25/64	2- 5/16	3-13/32	2- 3/16	3- 7/16	2-1/8	3-1/2
33	2- 9/16	3-33/64	2- 7/16	3-17/32	2- 5/16	3- 9/16	2-1/4	3-5/8
34	2-11/16	3-41/64	2- 9/16	3-21/32	2- 7/16	3-11/16	2-3/8	3-3/4
35	2-13/16	3-49/64	2-11/16	3-25/32	2- 9/16	3-13/16	2-1/2	3-7/8
36	2-15/16	3-57/64	2-13/16	3-29/32	2-11/16	3-15/16	2-5/8	4
37	3- 1/16	4- 1/64	2-15/16	4- 1/32	2-13/16	4- 1/16	2-3/4	4-1/8
40	3- 3/16	4- 9/64	3- 1/16	4- 5/32	2-15/16	4- 3/16	2-7/8	4-1/4
41	3- 5/16	4-17/64	3- 3/16	4- 9/32	3- 1/16	4- 5/16	3	4-3/8
42	3- 7/16	4-25/64	3- 5/16	4-13/32	3- 3/16	4- 7/16	3-1/8	4-1/2
43	3- 9/16	4-33/64	3- 7/16	4-17/32	3- 5/16	4- 9/16	3-1/4	4-5/8
44	3-11/16	4-41/64	3- 9/16	4-21/32	3- 7/16	4-11/16	3-3/8	4-3/4
45	3-13/16	4-49/64	3-11/16	4-25/32	3- 9/16	4-13/16	3-1/2	4-7/8
46	3-15/16	4-57/64	3-13/16	4-29/32	3-11/16	4-15/16	3-5/8	5
47	4- 1/16	5- 1/64	3-15/16	5- 1/32	3-13/16	5- 1/16	3-3/4	5-1/8
50	4- 3/16	5- 9/64	4- 1/16	5- 5/32	3-15/16	5- 3/16	3-7/8	5-1/4
51	4- 5/16	5-17/64	4- 3/16	5- 9/32	4- 1/16	5- 5/16	4	5-3/8
52	4- 7/16	5-25/64	4- 5/16	5-13/32	4- 3/16	5- 7/16	4-1/8	5-1/2
53	4- 9/16	5-33/64	4- 7/16	5-17/32	4- 5/16	5- 9/16	4-1/4	5-5/8
54	4-11/16	5-41/64	4- 9/16	5-21/32	4- 7/16	5-11/16	4-3/8	5-3/4
55	4-13/16	5-49/64	4-11/16	5-25/32	4- 9/16	5-13/16	4-1/2	5-7/8
56	4-15/16	5-57/64	4-13/16	5-29/32	4-11/16	5-15/16	4-5/8	6
57	5- 1/16	6- 1/64	4-15/16	6- 1/32	4-13/16	6- 1/16	4-3/4	6-1/8
60	5- 3/16	6- 9/64	5- 1/16	6- 5/32	4-15/16	6- 3/16	4-7/8	6-1/4
61	5- 5/16	6-17/64	5- 3/16	6- 9/32	5- 1/16	6- 5/16	5	6-3/8
62	5- 7/16	6-25/64	5- 5/16	6-13/32	5- 3/16	6- 7/16	5-1/8	6-1/2
63	5- 9/16	6-33/64	5- 7/16	6-17/32	5- 5/16	6- 9/16	5-1/4	6-5/8
64	5-11/16	6-41/64	5- 9/16	6-21/32	5- 7/16	6-11/16	5-3/8	6-3/4
65	5-13/16	6-49/64	5-11/16	6-25/32	5- 9/16	6-13/16	5-1/2	6-7/8
66	5-15/16	6-57/64	5-13/16	6-29/32	5-11/16	6-15/16	5-5/8	7
67	6- 1/16	7- 1/64	5-15/16	7- 1/32	5-13/16	7- 1/16	5-3/4	7-1/8
70	6- 3/16	7- 9/64	6- 1/16	7- 5/32	5-15/16	7- 3/16	5-7/8	7-1/4
71	6- 5/16	7-17/64	6- 3/16	7- 9/32	6- 1/16	7- 5/16	6	7-3/8
72	6- 7/16	7-25/64	6- 5/16	7-13/32	6- 3/16	7- 7/16	6-1/8	7-1/2
73	6- 9/16	7-33/64	6- 7/16	7-17/32	6- 5/16	7- 9/16	6-1/4	7-5/8
74	6-11/16	7-41/64	6- 9/16	7-21/32	6- 7/16	7-11/16	6-3/8	7-3/4
75	6-13/16	7-49/64	6-11/16	7-25/32	6- 9/16	7-13/16	6-1/2	7-7/8
76	6-15/16	7-57/64	6-13/16	7-29/32	6-11/16	7-15/16	6-5/8	8
77	7- 1/16	8- 1/64	6-15/16	8- 1/32	6-13/16	8- 1/16	6-3/4	8-1/8
80	7- 3/16	8- 9/64	7- 1/16	8- 5/32	6-15/16	8- 3/16	6-7/8	8-1/4
81							7	8-3/8
82							7-1/8	8-1/2

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the AIR FORCE and Navy Departments as the AIR FORCE-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new designs, not later than 6 months after the latest date of approval shown. It may be put into effect, however, at an earlier date after promulgation.

APPROVED 29 Mar 49 REVISED

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN173 THRU AN186
AN-B-3	BOLT-AIRCRAFT, CLOSE TOLERANCE	SHEET 1 OF 5 SHEETS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:14Z
Check the source to verify that this is the current version before use.