
Form Approved
OMB No. 0704-0188

MS90727-165
(MOD. THREAD LGTH. TO .75
NOMINAL GRIP 1.5 )
OR
MS90727-168
(MOD. LGTH. TO 2.25
NOMINAL GRIP 1.5 )


MS35691-53

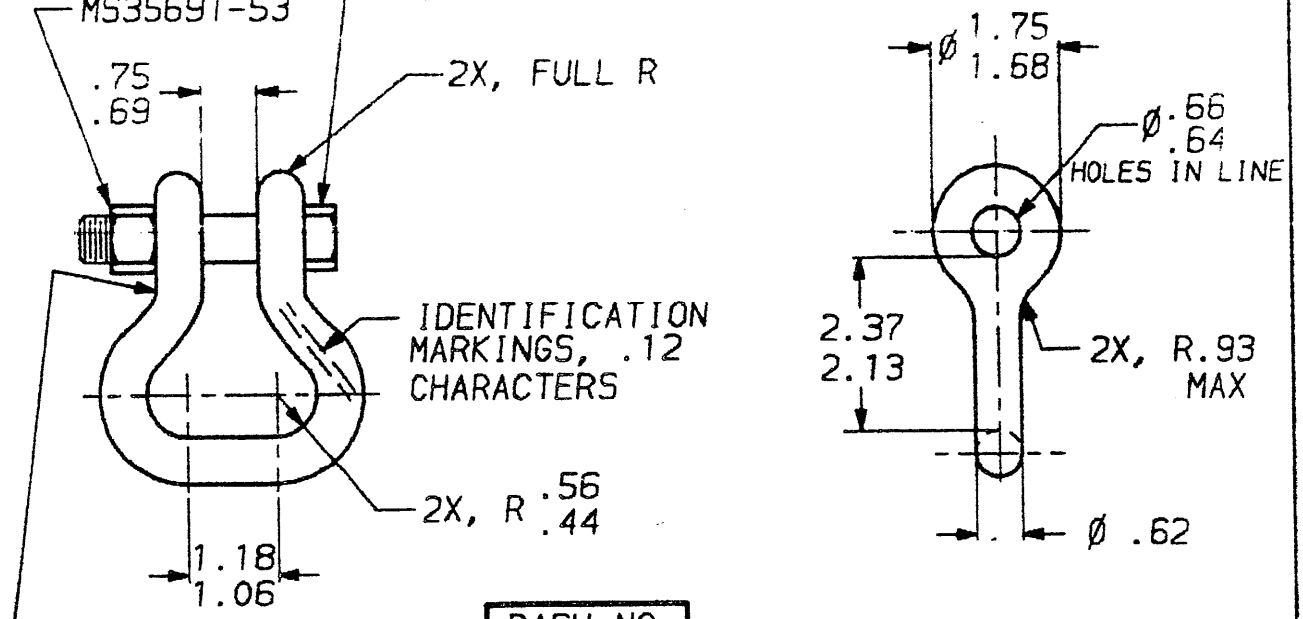


| DASH NO. | |
|---|---|
| -1 | ASSEMBLY |
| -6 | MODIFIED BOLT IN -1 ASSY |

MS35691-61

MS90727-197
(MOD. THREAD LGTH. TO 1.25
NOMINAL GRIP 3.25 )
OR
MS90727-199
(MOD. LGTH. TO 4.50
NOMINAL GRIP 3.25 )

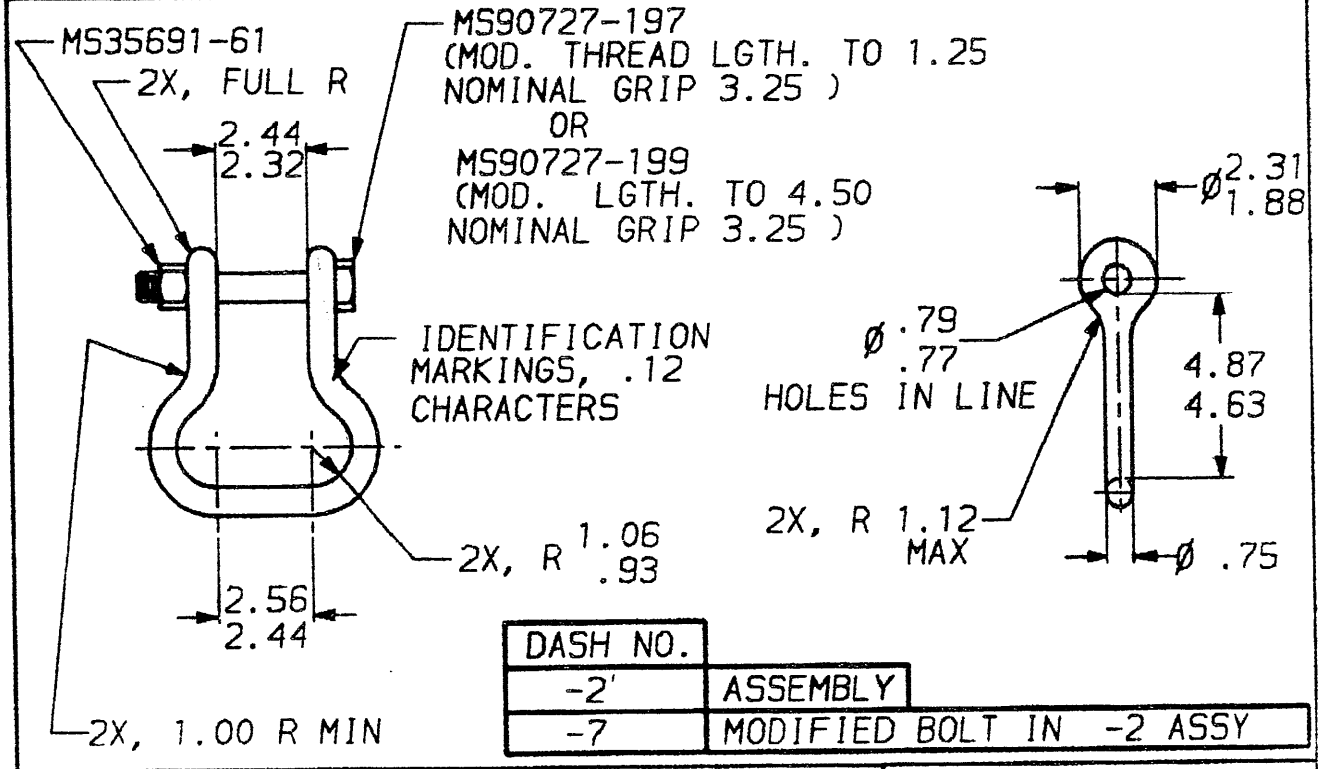


| DASH NO. | |
|---|---|
| -2 | ASSEMBLY |
| -7 | MODIFIED BOLT IN -2 ASSY |

PREPARING ACTIVITY: ARMY-GL
CUSTODIANS: ARMY-GL NAVY-AS AIR FORCE-99 DLA-
REVIEW: AF-82, ARMY-TR
USER: NAVY-MC
PROJECT NUMBER: 1670-0775

MILITARY SPECIFICATION SHEET

TITLE
CLEVISES, SUSPENSION, AIR DELIVERY-TYPE I

SPECIFICATION SHEET NUMBER
MS 70087L 12 FEBRUARY 92

SUPERSEDING MS70087K 8 NOV 88

AMSC- N/A FSC- 1670

DISTRIBUTION STATEMENT A.
APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.



DD Form 672, MAY 88

THE REQUIREMENTS FOR ACQUIRING THE PRODUCTS DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-40157 CLEVISES, SUSPENSION, AIR DELIVERY TYPE I. GENERAL SPECIFICATION FOR

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTIONS OF ALL NEW ENGINEERING AND DESIGN APPLICATIONS FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.


Source: https://assist.dla.mil -- Downloaded: 20261023T20:25Z
Check the source to verify that this is the current version before use.

Form Approved
OMB No. 0704-0188

THE REQUIREMENTS FOR ACQUIRING THE PRODUCTS DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-40139 CLEVISES, AIR DELIVERY TYPE, GENERAL SPECIFICATION FOR


THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTIONS OF ALL NEW ENGINEERING AND DESIGN APPLICATIONS FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

MS90727-241
(MOD. THREAD LGTH. TO 1.50
NOMINAL GRIP 3.25)
OR
MS90727-243
(MOD. LGTH. TO 4.75
NOMINAL GRIP 3.25)

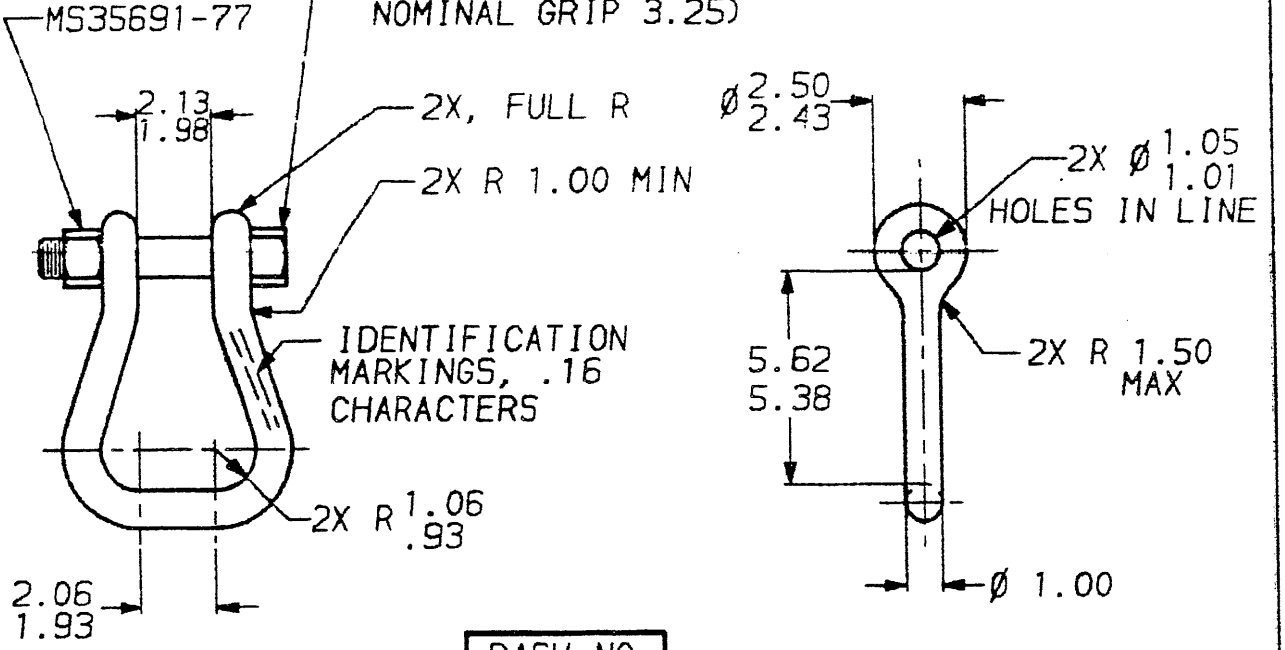


| DASH NO. | |
|---|---|
| -3 | ASSEMBLY |
| -8 | MODIFIED BOLT IN -3 ASSY |

MS90727-244
(MOD. THREAD LGTH. TO 1.37
NOMINAL GRIP 4.62)

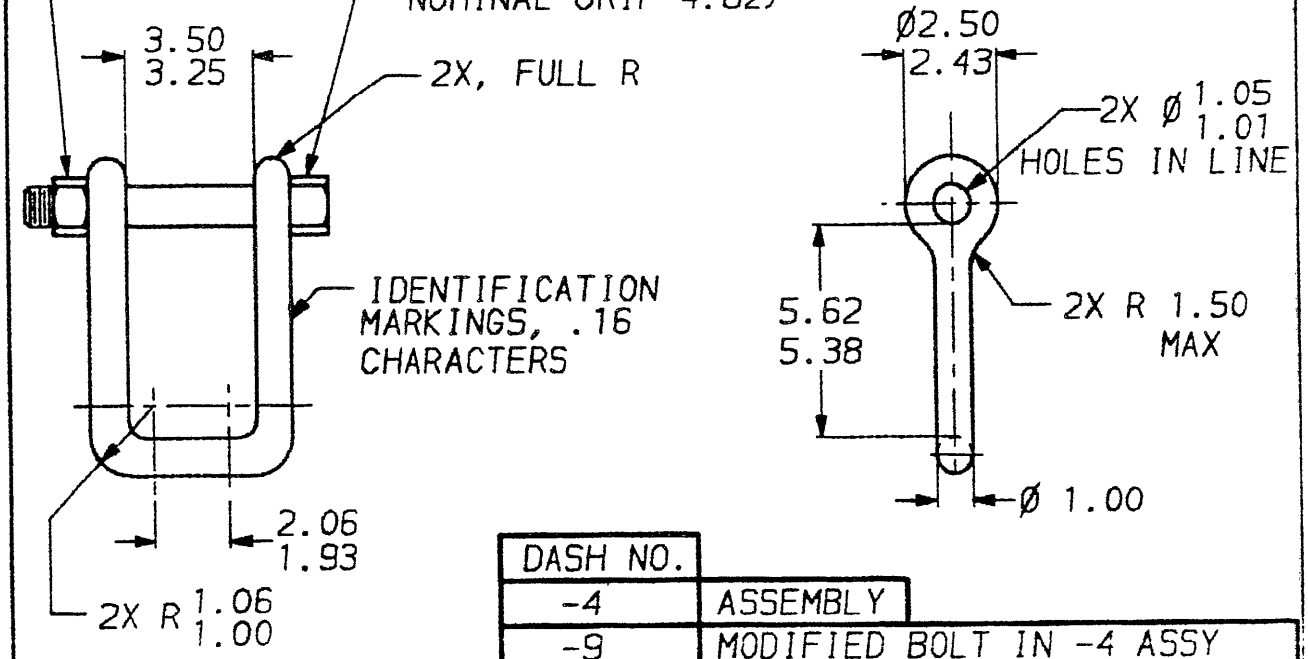


| DASH NO. | |
|---|---|
| -4 | ASSEMBLY |
| -9 | MODIFIED BOLT IN -4 ASSY |

PREPARING ACTIVITY: ARMY-GL
CUSTODIANS: ARMY-GL NAVY-AS AIR FORCE-99 DLA-
REVIEW: AF-82, ARMY-TR
USER: NAVY-MC
PROJECT NUMBER: 1670-0779
DISTRIBUTION STATEMENT

MILITARY SPECIFICATION SHEET
TITLE
CLEVISES, SUSPENSION, AIR DELIVERY-TYPE I

SPECIFICATION SHEET NUMBER
MS 70087L 12 FEBRUARY
SUPERSEDING MS70087K 8 NOV 88
AMSC- N/A FSC- 1670




DD Form 672, MAY 88 Previous editions are obsolete.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:25Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.
SELECTIONS OF ALL NEW ENGINEERING AND DESIGN APPLICATIONS FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCTS DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-6017 CLEVISES, RIGGING, AIR DELIVERY TYPE, GENERAL SPECIFICATION FOR

Form Approved
OMB No. 0704-0188

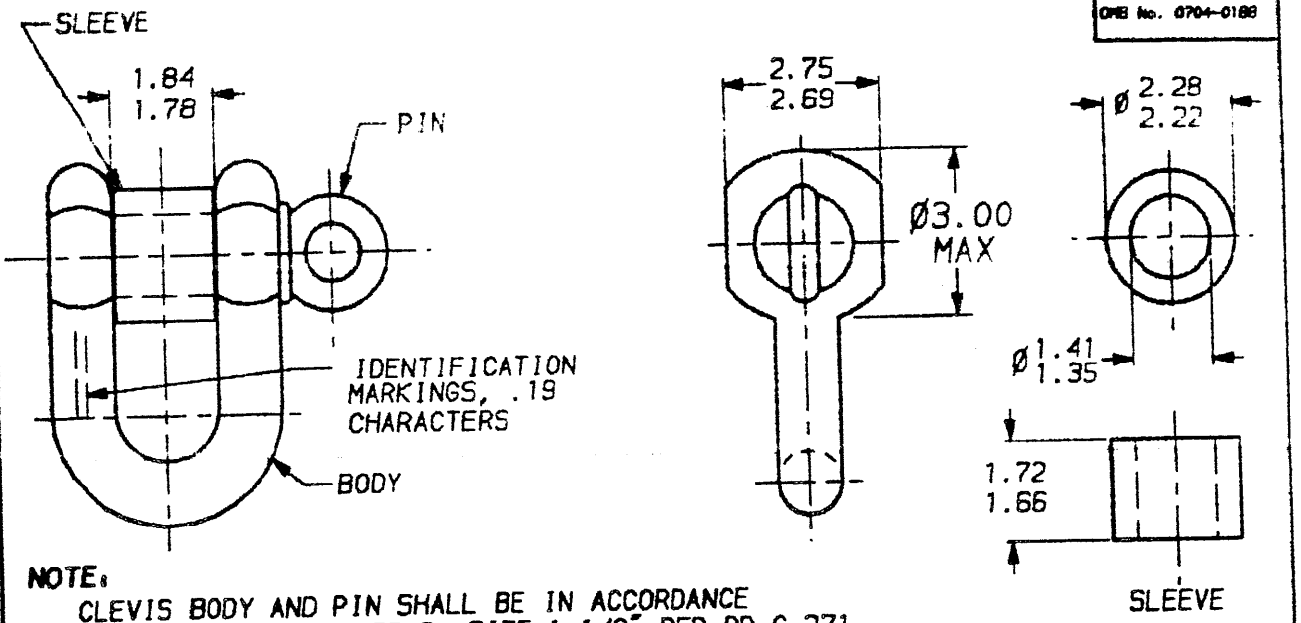


**NOTE:**
CLEVIS BODY AND PIN SHALL BE IN ACCORDANCE WITH TYPE IVB, CLASS 2, SIZE 1-1/8" PER RR-C-271, EXCEPT FOR THE REQUIREMENTS AS SHOWN IN THIS DOCUMENT.

| DASH NO. | |
|---|---|
| -5 | ASSEMBLY |
| -10 | PIN IN -5 ASSY |
| -11 | SLEEVE IN -5 ASSY |

## REQUIREMENTS

EXCEPT AS SPECIFIED HEREIN, REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE PROCUREMENT SPECIFICATION.

| | |
|---|---|
| MATERIAL | -CLEVIS BODY FOR -1, -2, -3, -4, -5 AND -10 PIN SHALL BE STEEL ALLOY AISI/SAE 4130/4140/OR 8630 CONFORMING TO COMPOSITION REQUIREMENTS OF FED-STD-66. SLEEVE, -11 STEEL, AISI/SAE 1010/1020, FED-STD-66. |
| METHOD OF FORMING | -CLEVIS BODIES - FORGING. |
| TOLERANCES | -UNLESS OTHERWISE SPECIFIED, COMMERCIAL TOLERANCES FOR IMPRESSION DIE FORGINGS DEVELOPED BY THE DROP FORGING ASSOCIATION SHALL APPLY. |
| HEAT TREATMENT | -CLEVIS BODIES FOR -1, -2, -3, -4, -5, AND -10 PIN SHALL BE HEAT TREATED TO 150,000 - 170,000 PSI ULTIMATE TENSILE STRENGTH IN ACCORDANCE WITH MIL-H-6875. |
| SURFACE ROUGHNESS | -250 RHR MAX. IN ACCORDANCE WITH AMERICAN NATIONAL STANDARDS INSTITUTE, INC. ANSI B46.1 BREAK SHARP EDGES AND REMOVE ALL BURRS. |
| PROTECTIVE FINISH | -FOR -1, -2, -3, AND -4 CLEVIS BODIES AND FOR -11 SLEEVE AND ALTERNATE FOR -5 CLEVIS AND -10 PIN, COATING, IMMERSION ZINC FLAKE/CHROMATE DISPERSION PER MIL-C-87115, CLASS 3, TYPE II. |
| PROOF LOAD | -SPECIFIED PROOF LOAD SHALL BE APPLIED WITH EVEN DISTRIBUTION ACROSS SPAN OF BOLT AND CLEVIS BODY BY A SUITABLE TEST FIXTURE. |

## NOTES

1. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
3. PART NUMBER: THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER. EXAMPLE: MS70087-5.

PREPARING ACTIVITY: ARMY-GL
CUSTODIANS: ARMY-GL NAVY-AS AIR FORCE-99 DLA-
REVIEW: AF-82, ARMY-TR
USER: NAVY-MC
PROJECT NUMBER: 1670-0779
DISTRIBUTION STATEMENT

MILITARY SPECIFICATION SHEET
TITLE
CLEVISES, SUSPENSION, AIR DELIVERY-TYPE I

SPECIFICATION SHEET NUMBER
MS 70087L 12 FEBRUARY 92
SUPERSEDING MS70087K 8 NOV 88
AMSC- N/A FSC- 1670




Source: https://assist.dla.mil -- Downloaded: 202610-23T20:25Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.
SELECTIONS OF ALL NEW ENGINEERING AND DESIGN APPLICATIONS FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.


THE REQUIREMENTS FOR ACQUIRING THE PRODUCTS DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-60137 CLEVISES, RIBBON, AIR DELIVERY TYPE I, GENERAL SPECIFICATION FOR.

# CRITICAL DIMENSIONS - CRITICAL FUNCTIONS/TESTS

Form Approved
OMB No. 0704-0188

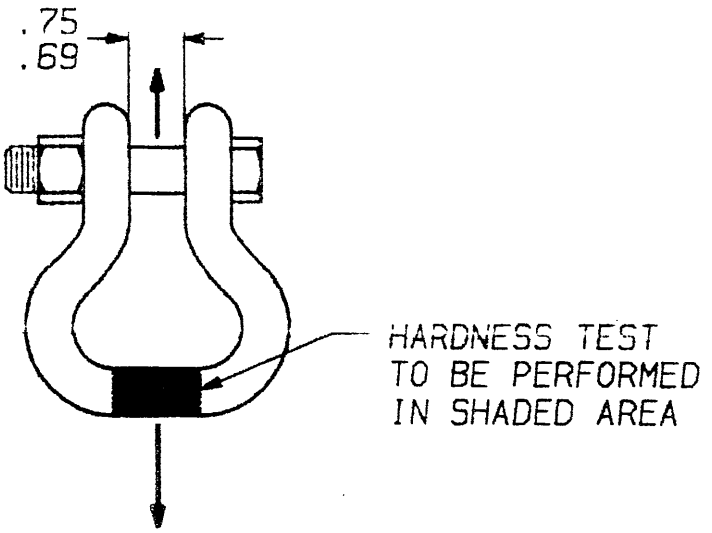


| DASH NO. |
|---|
| -1 |

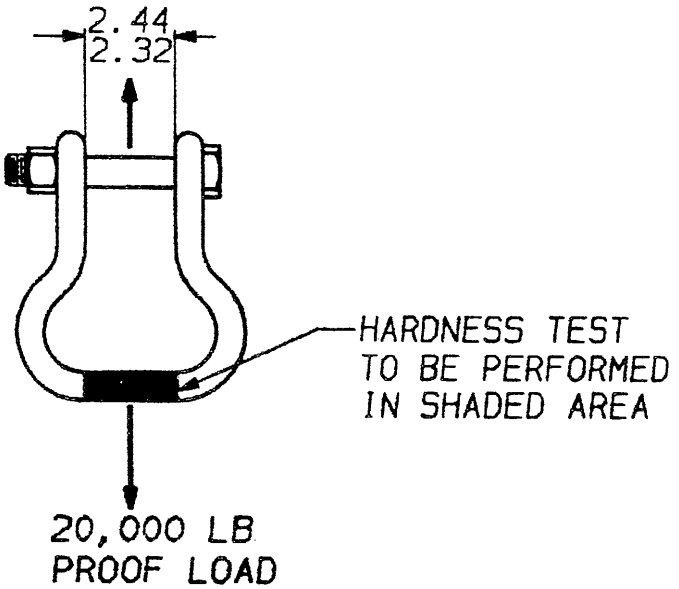


| DASH NO. |
|---|
| -2 |

CRITICAL DIMENSIONS: AS SHOWN
CRITICAL FUNCTIONS/TESTS:
1. HARDNESS TEST PER MIL-H-6875 IN AREAS SHOWN.
2. PROOF LOAD.
3. ACCEPT SPECIFIED BOLT AND NUT FREELY.
4. NO THREADS IN GRIP AREA.

| | | |
|---|---|---|
| PREPARING ACTIVITY: ARMY-GL<br>CUSTODIANS: ARMY-GL NAVY-AS AIR FORCE-99 DLA-<br>REVIEW: AF-82, ARMY-TR<br>USER: NAVY-MC<br>PROJECT NUMBER: 1670-0779 | MILITARY SPECIFICATION SHEET<br>TITLE<br>CLEVISES, SUSPENSION, AIR DELIVERY-TYPE I | SPECIFICATION SHEET NUMBER<br>MS 70087L 12 FEBRUARY 92<br>SUPERSEDING MS70087K 8 NOV 88<br>AMSC- N/A FSC- 1670 |
| DISTRIBUTION STATEMENT | | Page 4 of 6 |




Source: https://assist.dla.mil -- Downloaded: 2020-10-23T20:25Z
Check the source to verify that this is the current version before use.


THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.
SELECTIONS OF ALL NEW ENGINEERING AND DESIGN APPLICATIONS FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCTS DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-40137 CLEVISES, RINGING, AIR DELIVERY TYPE, GENERAL SPECIFICATION FOR


Form Approved
OMB No. 0704-0188


# CRITICAL DIMENSIONS - CRITICAL FUNCTIONS/TESTS

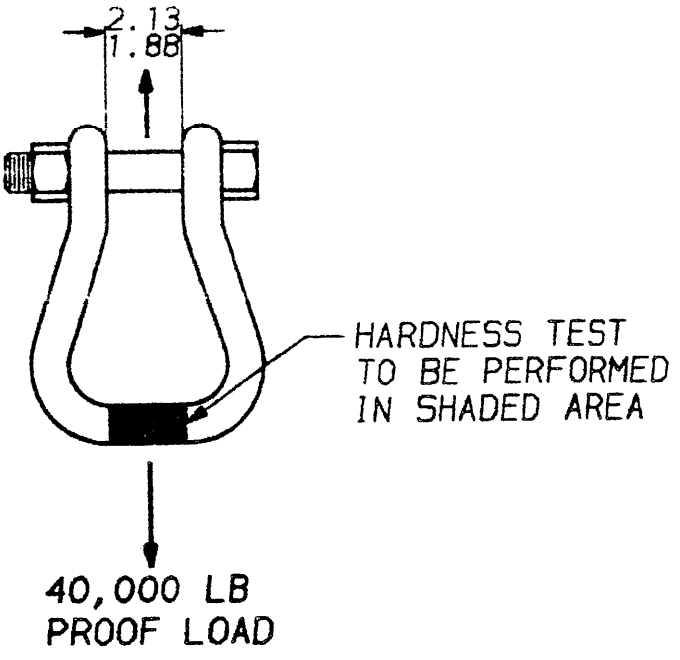

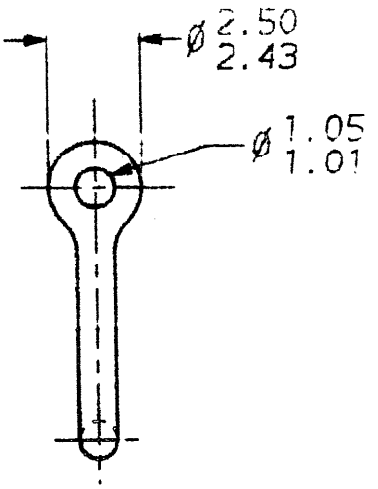
| DASH NO. |
|---|
| -3 |

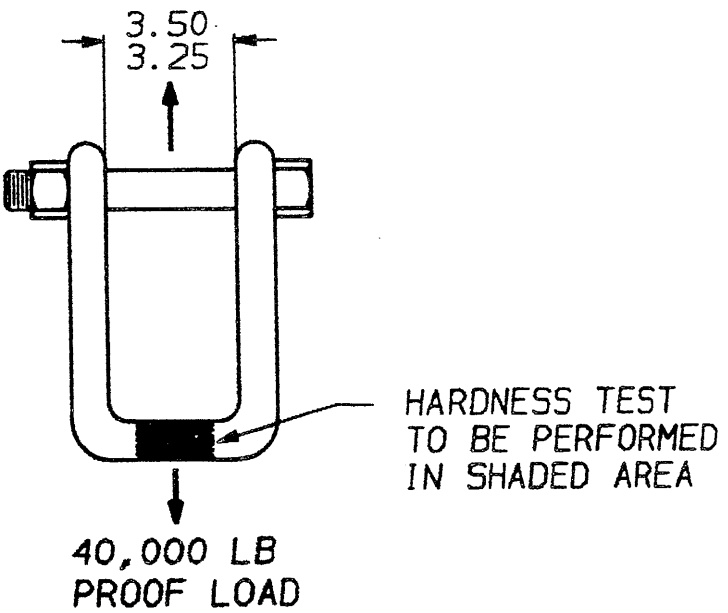


| DASH NO. |
|---|
| -4 |

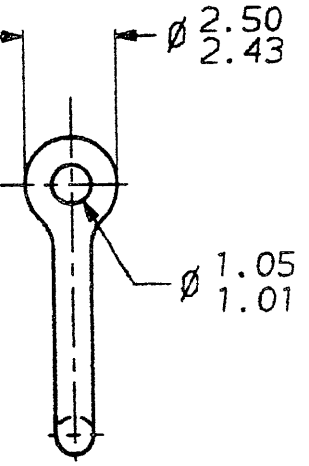CRITICAL DIMENSIONS: AS SHOWN
CRITICAL FUNCTIONS/TESTS:
1. HARDNESS TEST PER MIL-H-6875 IN AREAS SHOWN.
2. PROOF LOAD.
3. ACCEPT SPECIFIED BOLT AND NUT FREELY.
4. NO THREADS IN GRIP AREA.

| | | |
|---|---|---|
| PREPARING ACTIVITY: ARMY-GL<br>CUSTODIANS: ARMY-GL NAVY-AS AIR FORCE-99 DLA-<br>REVIEW: AF-82, ARMY-TR<br>USER: NAVY-MC<br>PROJECT NUMBER: 1670-0779<br>DISTRIBUTION STATEMENT | MILITARY SPECIFICATION SHEET<br>TITLE<br>CLEVISES, SUSPENSION, AIR DELIVERY-TYPE I | SPECIFICATION SHEET NUMBER<br>MS 70087L 12 FEBRUARY 92<br>SUPERSEDING MS70087K 8 NOV 88<br>AMSC- N/A FSC- 1670<br>Page 5 of 6 |


Source: https://assist.dla.mil -- Downloaded: 202610-23T20:25Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCTS DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION. MIL-C-40197 CLEVISES, SUSPENSION, AIR DELIVERY TYPE. GENERAL SPECIFICATION FOR.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTIONS OF ALL NEW ENGINEERING AND DESIGN APPLICATIONS FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

Form Approved
OMB No. 0704-0188

# CRITICAL DIMENSIONS - CRITICAL FUNCTIONS/TESTS

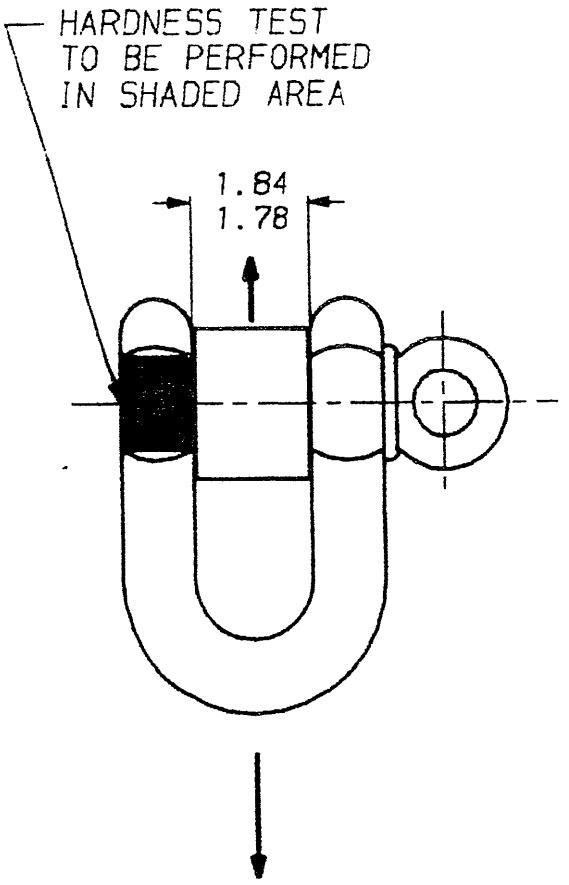


| DASH NO. |
|---|
| -5 |

CRITICAL DIMENSIONS: AS SHOWN
CRITICAL FUNCTIONS/TESTS: 1. HARDNESS TEST PER MIL-H-6875 IN AREAS SHOWN.
2. PROOF LOAD.
3. ACCEPT SPECIFIED PIN AND SLEEVE FREELY.

| | | |
|---|---|---|
| PREPARING ACTIVITY: ARMY-GL<br>CUSTODIANS: ARMY-GL NAVY-AS AIR FORCE-99 DLA-<br>REVIEW: AF-82 ARMY-TR<br>USER: NAVY-MC<br>PROJECT NUMBER: 1670-0779<br>DISTRIBUTION STATEMENT | MILITARY SPECIFICATION SHEET<br>TITLE<br>CLEVISES, SUSPENSION, AIR DELIVERY-TYPE I | SPECIFICATION SHEET NUMBER<br>MS 70087L 12 FEBRUARY 92<br>SUPERSEDING MS70087K 8 NOV 88<br>AMSC- N/A FSC- 1670<br>Page 6 of 6 |

DD Form 672, MAY 88 Previous editions are obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:25Z
Check the source to verify that this is the current version before use.