INCH-POUND

A-A-3191
May 1, 2002

COMMERCIAL ITEM DESCRIPTION

BRUSHES: ARTISTS

The General Services Administration has authorized the use of this commercial item description by all federal agencies.

1. SCOPE. This commercial item description covers artists' brushes used for water and oil coloring, lettering, sign writing, and those in lithographic processes.

2. CLASSIFICATION.

Type
I – Water Colors
II – Oil and Water Colors
III – Oils, Varnishes, and Lacquers (lettering and sign writing)
IV – Lithographic processes

Class
1 – Squirrel Tail Hair
2 – Pure Red Sable Hair
3 – Ox Ear Hair
4. – Camel Hair
5. – Bristle Hog Hair

Styles
A – Round, Single Taper Point
B – Flat, Chisel Edge
C – Flat, Square Edge
D – Round, Square Edge

3. SALIENT CHARACTERISTICS.

3.1 Design. The brushes shall consist of a handle with hair held in place by means of a ferrule and setting compound. Brushes shall be similar to Figures 1-5 and shall conform to the dimensional requirements of Tables I through V.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent to: General Services Administration, Federal Supply Service, Hardware Super Store (6FEE), 1500 Bannister Rd. Bldg. #6, Kansas City, Missouri. 64131.

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:31Z
Check the source to verify that this is the current version before use.

3.2 Materials. The materials used in the manufacturing of the brushes shall be such as to produce brushes conforming to the physical requirements hereinafter described.

3.2.1 Hair. The hair shall be of the best quality commercially available and as specified by the class designation.

3.2.2 Ferrule. Ferrules shall be fabricated of seamless nonferrous metals or of nonferrous metals with a lockseam side overlap. Lengths, widths, shapes and thickness of the ferrules shall be that used in standard manufactured practice . Ferrules shall be fastened to the handle with a snug fit so that there is no play between the handle and the ferrule.

3.2.3 Handle. Handles shall be either a smoothly finished close-grained hardwood, or synthetic material (molded hard plastic) with all spurs and runners removed. Hardwood handles shall be smoothly finished with a minimum of three dipped coats of varnish, lacquer or enamel.


3.2.4 Setting Compound. The setting compound shall be vulcanized rubber, brushmaker's cement or other suitable material which will hold the hair securely. The setting compound shall not injure the hair, shall not become brittle, and shall not extend beyond the edge of the ferrule. The setting compound shall be insoluble in lacquer, paint, varnish, water, thinner and solvents.

3.2.5 Finished Brushes. The finished brush shall be free of loose hair, properly trimmed, or any other imperfections which may impair their durability and serviceability.

3.3 Type I, Water Colors

3.3.1 Class 1, 2, & 4 Style A. Brushes shall be furnished in the Style A design in Class 1, 2, or 4. The hair shall be squirrel tail hair for Class 1, red sable hair for Class 2, and camel hair for Class 4, be thoroughly sterilized and set to a single tapered point. The brushes shall be suitable for use with water colors. Type I, Class 1, 2, & 4, and Style A brushes shall be similar to Figure 1 and shall conform to the dimension of Table I.

Figure 1



Source: https://assist.dla.mil -- Downloaded: 202610-26T08:31Z
Check the source to verify that this is the currentversion before use.


Table I. Type I, Class 1, 2, & 4 Style A Brushes

Ferrule Diameter Inside at Brush End	Class	Length of Hair Outside of Ferrule	Depth of Ferrule	Hold of Hair in Ferrule	Length of Handle
Inch	-	Inch	Inch	Inch	Inch
3/128	1	1/2	1-3/16	3/8	5
6/128	1	3/8	1	5/16	5
10/128	1	1/2	1-1/16	3/8	5
15/128	1	11/16	1-1/8	9/16	5
18/128	1	1-1/4	-	-	5
24/128	1	13/16	1-7/16	11/16	5
32/128	1	1-1/16	1-1/16	1-1/2	5
38/128	1	1-1/8	1-1/2	3/4	5
40/128	1	1-3/16	1-1/2	3/4	5
5/8	2	7/8	-	-	5
7/64	4	7/8	-	-	5
5/32	4	3/4	-	-	5
9/64	2	11/16	-	-	5

3.4 Type II, Oil and Water Colors

3.4.1 Class 2, & 3, Style A. Type II brushes shall be furnished in the Style A design in Class 2. The hair shall be pure red sable for Class 2, and ox ear hair for Class 3, thoroughly sterilized and set to a single tapered point. The brushes shall be suitable for use with oils or with water colors and shall be similar to Figure 2, and shall conform to the dimensions of Table II.

Figure 2



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:31Z
Check the source to verify that this is the current version before use.


Table II. Type II, Class 2 & 3, Style A Brushes

Ferrule Diameter Inside at Brush End	Class	Length of Hair Outside of Ferrule	Depth of Ferrule	Hold of Hair in Ferrule	Length of Handle
Inch	-	Inch	Inch	Inch	Inch
6/128	2	5/16	1	5/16	9
8/128	2	7/16	1	5/16	9
10/128	2	1/2	1-1/16	1/2	9
13/128	2	9/16	1-1/8	5/8	9
15/128	2 & 3	5/8	1-1/8	5/8	9
18/128	2	11/16	1-1/4	5/8	9
26/128	2	13/16	1-7/16	5/8	9
30/128	2	7/8	1-1/2	5/8	9
34/128	2	1	1-1/2	5/8	9

3.5 Type III, Oils, Varnishes and Lacquers (Lettering and Sign Writing).

3.5.1 Class 3, Style B. The hair in Type III, Class 3, and Style B brushes shall be good quality, natural color, ox ear hair with natural points preserved and reversed hair removed. Hair shall be thoroughly sterilized and set to a flat, chisel edge. The brushes shall be suitable for use with oils, varnishes and lacquers. The brushes shall be similar to Figure 3, and shall conform to the dimensions of Table III.

Figure 3

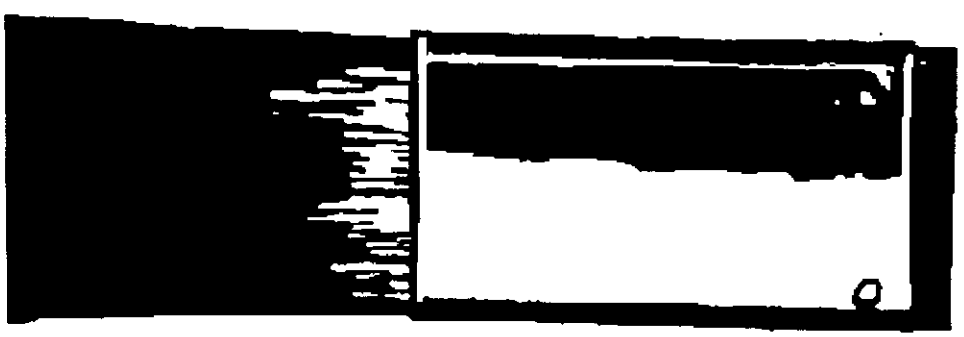

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:31Z
Check the source to verify that this is the current version before use.

Table III. Type III, Class 3, Style B Brushes

Brush Width	Length of Hair Outside of Ferrule (minimum)	Length of Hair Inside Ferrule (minimum)
Inch	Inch	1/2
1/8	11/16	1/2
1/4	3/4	1/2
3/8	13/16	1/2
1/2	15/16	1/2
5/8	1	1/2
3/4	1-1/16	1/2
7/8	1-3/16	1/2
1	1/1/4	1/2
1-1/4	1-5/16	1/2
1-1/2	1-3/8	1/2

3.5.2 Class 1, & 2 Style C. The hair in type III, class 1, and Style C brushes shall be squirrel tail hair with natural points preserved and reversed hair removed. The hair in type III, class 2, and Style C shall be red sable hair. Hair shall be thoroughly baked and set to a flat, square edge. The brushes shall be suitable for use with oils, varnishes, and lacquers. The brushes shall conform to the dimensions of Table IIIA.

Table IIIA. Type III, Class 1 & 2, Style C Brushes

Brush Width	Class	Length of Hair Outside of Ferrule (minimum)	Length of Hair Inside Ferrule (minimum)
Inch	-	Inch	Inch
1/4	1	3/4	1/2
3/8	1 & 2	5/8	1/2
1/2	1	15/16	1/2
19/32	1	7/8	1/2
5/8	1	1	1/2
3/4	1	1-1/16	1/2
7/8	1	1	1/2
1	1	1-1/4	1/2
1-1/2	1	1-3/8	1/2

3.5.3 Class 3, Style D. The hair in Type III, Class 3, and Style D brushes shall be of the best quality ox ear hair having good life and spring and thoroughly cleaned and washed. The hair stock shall have good points, be free from turned hairs, and shall be set to a round, square edge. The brush shall be suitable for use with oils, varnishes and lacquers. Type III, Class 3, and Style D brushes shall be similar to Figure 4 and shall conform to dimensions of Table IV.

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:31Z
Check the source to verify that this is the current version before use.

Figure 4

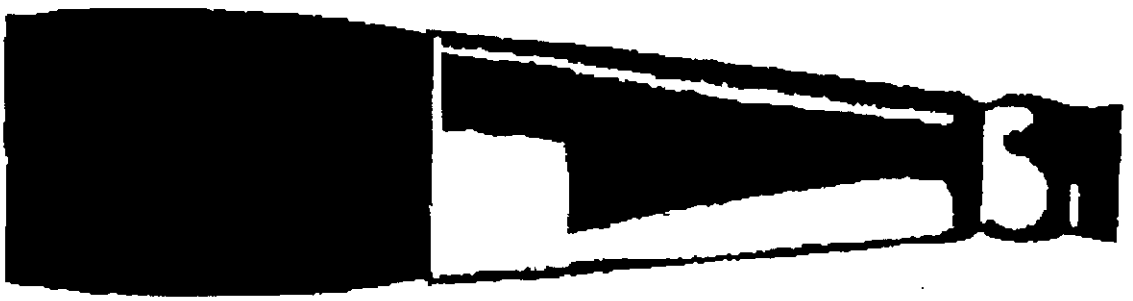



Table IV. Type III, Class 3, Style D Brushes

Outside Diameter of Ferrule at Same End	Length of Hair Outside Ferrule	Depth of Ferrule	Length of Handle, Including Ferrule
Inch	Inch	Inch	Inch
1/16	3/4	1	7
3/32	7/8	1-1/16	7
1/8	1	1-1/16	7
5/32	1-3/8	1-1/8	7

3.6 Type IV, Lithographic Processes.

3.6.1 Class 1, Style C. The hair in Type IV, and Style C brushes shall be squirrel tail hair for Class 1, thoroughly baked and set to a flat, square edge. The brushes shall be suitable for use in lithographic processes. The brushes shall be similar to Figure 5 and conform to dimensions of Table V.

Figure 5

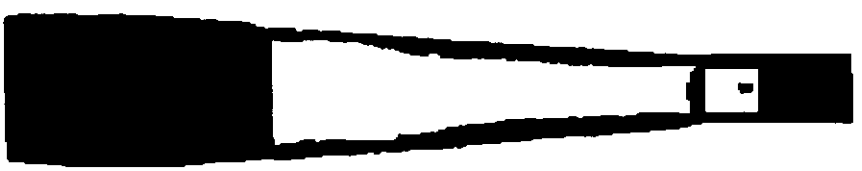

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:31Z
Check the source to verify that this is the currentversion before use.

Table V. Type IV, Class 1, Style C Brushes

Ferrule Diameter Inside at Brush End	Length of Hair Outside of Ferrule	Length of Hair Outside Ferrule	Depth of Ferrule	Hold of Hair in Ferrule	Length of Handle
Inch	Inch	Inch	Inch	Inch	Inch
1/2	5/32	7/8	1-1/2	1/2	5-3/4
1	7/32	1	1-3/4	1/2	5-3/4

4. REGULATORY REQUIREMENTS.

4.1 The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE

5.1 Product Conformance. The product provided shall meet the salient characteristics of this Commercial Item Description, conform to the producer's own drawing , specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

5.2 Responsibility for Inspection. Unless otherwise specified, the contractor is responsible for the performance of all inspection requirements and may use any commercial facilities (including the contractor's own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any of the inspections deemed necessary to assure the item conforms to the specified requirements.

6. PACKAGING. Preservation, packaging and marking shall be as specified in the contract or order.

7. NOTES.

7.1 Source of Documents.

7.1.1 Federal Acquisition Regulation (FAR), Government Printing Office, Superintendent of Documents, Washington DC. 20401-9371.

7.2 Ordering data. The contract or order should specify the following:

a. CID document number.
b. National Stock Number (NSN)
c. Type, Class, Style
d. Packaging requirements.

7.3 National Stock Numbers (NSN's). A list of NSN's assigned that correspond to this CID. The list may not be indicative of all possible NSN's associated with the CID. The term *size* is defined as either the ferrule diameter inside at brush end, outside diameter of ferrule at same end, or brush width (Refer to the appropriate Tables I through V).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:31Z
Check the source to verify that this is the current version before use.

NSN	TYPE	CLASS	STYLE	SIZE
8020-00-224-8022	I	1	A	6/128
8020-00-224-8024	I	1	A	15/128
8020-00-224-8025	I	1	A	38/128
8020-00-262-9099	I	1	A	10/128
8020-00-264-3883	I	1	A	32/128
8020-00-503-0000	I	1	A	3/128
8020-00-664-1375	I	1	A	24/128
8020-00-283-0900	I	1	A	18/128
8020-00-053-5727	I	2	A	9/64
8020-00-397-2863	I	2	A	5/8
8020-00-200-6316	I	4	A	7/64
8020-00-200-6318	I	4	A	5/32
8020-00-200-2843	II	2	A	18/128
8020-00-224-8027	II	2	A	34/128
8020-00-257-0379	II	2	A	6/128
8020-00-257-0382	II	2	A	8/128
8020-00-262-9098	II	2	A	10/128
8020-00-598-5907	II	2	A	26/128
8020-00-224-8026	II	3	A	15/128
8020-00-597-4767	III	1	C	3/8
8020-00-597-4768	III	1	C	7/8
8020-00-224-8006	III	3	B	3/8
8020-00-224-8010	III	3	B	1
8020-00-240-6361	III	3	B	1/8
8020-00-240-6362	III	3	B	1/4
8020-00-246-8503	III	3	D	3/32
8020-00-246-8504	III	3	D	1/8
8020-00-246-8505	III	3	D	5/32
8020-00-586-6045	III	2	C	3/8
8020-00-409-3000	IV	1	C	1
8020-00-619-8929	IV	1	C	1/2

7.4 Key words. Brushes, Artists

MILITARY INTERESTS:
NONE: DoD has no registered interest in revisions and amendments to this Commercial Item Description until further notice.

Preparing Activity:
GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:31Z
Check the source to verify that this is the current version before use.