INCH-POUND

MS9382A
07 October 2016
SUPERSEDING
MS9382(ASG)
03 October 1966


MILITARY SPECIFICATION SHEET

TEE, TUBE - BRAZING, AMS 5646

Inactive for new design after 14 August 1996.


This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet.

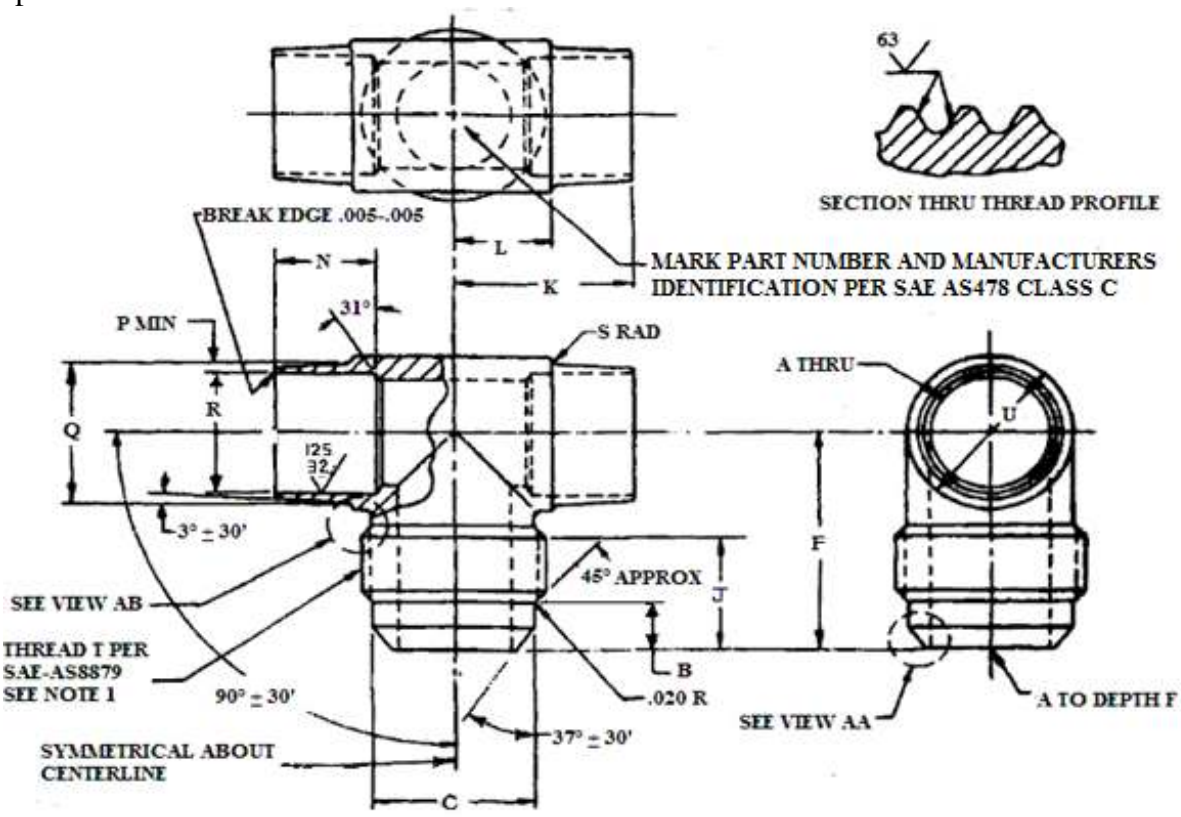

AMSC N/A FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:16Z
Check the source to verify that this is the current version before use.

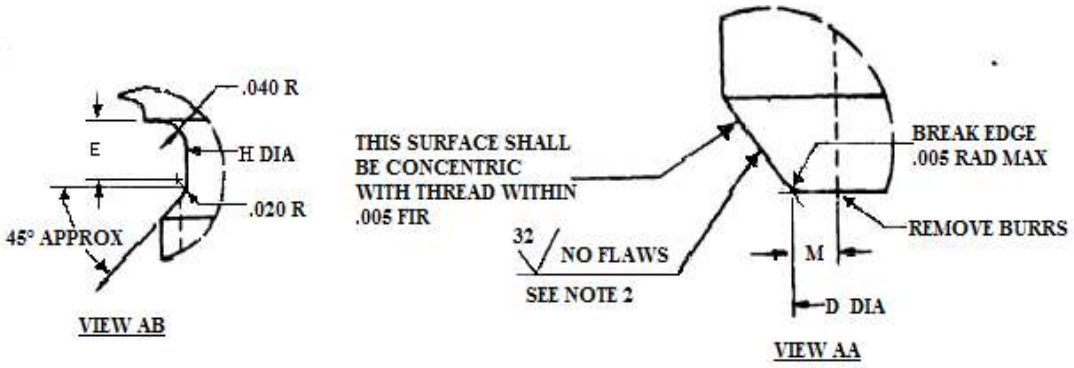

Requirements:

1. Threads on sizes -16 and smaller shall be rolled per SAE AS7472.
* 2. Conical sealing surface shall be free of flaws, nicks, chatter marks and low spots when viewed with the unaided eye.
3. With the exception of diameter U, all diameters about their respective axes shall be concentric within 0.010 FIR. Diameter U shall be concentric with diameter R within 0.020 FIR.
4. Dimensions are to sharp corners unless otherwise specified.
5. Material: corrosion resistant steel, SAE AMS5646 forging.
* 6. Parts shall be degreased and then passivated per SAE AMS2700, Method I, Type 6.
7. Forging mismatch of 0.015 permissible.
8. Surface roughness: SAE AS291. Unless otherwise specified, machined surfaces to be 125 microinches.
* 9. Parts subject to fluorescent penetrant inspection per ASTM E1417. Acceptance criteria per MIL-STD-1907, Grade A.
10. Break sharp edges 0.003-0.015, unless otherwise specified.
11. Dimensions in inches. Unless otherwise specified, tolerances: linear dimensions ±0.010, angular dimensions ±5º.
12. Do not use unassigned part numbers.

Changes from previous issue. The margins of this specification sheet are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:16Z
Check the source to verify that this is the current version before use.

Part No.	Nom Tube OD	Thread T					A	B +.015 -.000	C Dia +.000 -.010	D Dia ±.003	E +.015 -.000	F
		Size	Major Dia	Pitch Dia	Minor Dia	Root Rad						
MS9382-02	.125	.3125-24UNJF-3A	.3053-.3125	.2827-.2854	.2591-.2644	.0063-.0075	.058-.065	.144	.245	.132	.063	.567
MS9382-03	.188	.375-24UNJF-3A	.3678-.3750	.3450-.3479	.3214-.3268	.0063-.0075	.121-.128	.144	.307	.195	.063	.625
MS9382-04	.250	.4375-20UNJF-3A	.4294-.4375	.4019-.4050	.3736-.3797	.0075-.0090	.168-.175	.160	.359	.242	.075	.726
MS9382-05	.312	.500-20UNJF-3A	.4919-.5000	.4643-.4765	.4360-.4422	.0075-.0090	.230-.237	.160	.421	.304	.075	.766
MS9382-06	.375	.5625-18UNJF-3A	.5538-.5625	.5230-.5264	.4916-.4983	.0083-.0100	.293-.301	.165	.476	.368	.083	.799
MS9382-07	.438	.625-18UNJF-3A	.6163-.6250	.5854-.5889	.5540-.5608	.0083-.0100	.355-.363	.165	.539	.430	.083	.833
MS9382-08	.500	.750-16UNJF-3A	.7406-.7500	.7056-.7094	.6702-.6778	.0094-.0113	.387-.395	.229	.654	.462	.094	.993
MS9382-09	.562	.8125-16UNJ-3A	.8031-.8125	.7683-.7719	.7329-.7403	.0094-.0113	.434-.442	.229	.716	.509	.094	1.028
MS9382-10	.625	.875-14UNJF-3A	.8647-.8750	.8245-.8286	.7841-.7925	.0107-.0129	.480-.488	.255	.737	.555	.107	1.163
MS9382-11	.688	1.000-12UNJF-3A	.9886-1.0000	.9415-.9459	.8944-.9038	.0125-.0150	.542-.552	.304	.875	.619	.125	1.323
MS9382-12	.750	1.0625-12UNJ-3A	1.0511-1.0625	1.0042-1.0084	.9570-.9663	.0125-.0150	.604-.614	.304	.938	.681	.125	1.354
MS9382-14	.875	1.1875-12UNJ-3A	1.1761-1.1875	1.1291-1.1334	1.0820-1.0913	.0125-.0150	.729-.739	.304	1.062	.806	.125	1.462
MS9382-16	1.000	1.3125-12UNJ-3A	1.3011-1.3125	1.2541-1.2584	1.2070-1.2163	.0125-.0150	.839-.851	.312	1.188	.918	.125	1.537
MS9382-18	1.125	1.500-12UNJF-3A	1.4886-1.5000	1.4411-1.4459	1.3940-1.4038	.0125-.0150	.948-.960	.312	1.375	1.027	.125	1.674
MS9382-20	1.250	1.625-12UNJ-3A	1.6136-1.6250	1.5665-1.5709	1.5193-1.5288	.0125-.0150	1.073-1.086	.363	1.501	1.153	.125	1.739
MS9382-24	1.500	1.875-12UNJ-3A	1.8636-1.8750	1.8164-1.8209	1.7692-1.7788	.0125-.0150	1.307-1.320	.374	1.750	1.387	.125	1.993
MS9382-28	1.750	2.250-12UNJ-3A	2.2386-2.2500	2.1914-2.1959	2.1442-2.1538	.0125-.0150	1.542-1.557	.447	2.125	1.652	.125	2.292
MS9382-32	2.000	2.500-12UNJ-3A	2.4886-2.5000	2.4413-2.4459	2.3941-2.4038	.0125-.0150	1.776-1.791	.457	2.375	1.886	.125	2.552
MS9382-40	2.500	3.000-12UNJ-3A	2.9886-3.0000	2.9412-2.9459	2.8940-2.9038	.0125-.0150	2.276-2.291	.391	2.882	2.386	.125	2.578
MS9382-48	3.000	3.500-12UNJ-3A	3.4886-3.5000	3.4411-3.4459	3.3940-3.4038	.0125-.0150	2.776-2.791	.391	3.382	2.886	.125	2.906

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:16Z
Check the source to verify that this is the current version before use.

Part No.	H Dia ±.015	J +.020 -.010	K	L	M Min	N	P Min	Q Dia +.010 -.000	R Dia +.002 -.000	S	U Dia ±.015	Approx Lb/100
MS9382-02	.240	.317	.411	.188	.030	.346	.022	.171	.115	.031-.062	.240	1.02
MS9382-03	.300	.346	.454	.219	.030	.358	.024	.236	.178	.031-.062	.300	1.62
MS9382-04	.350	.398	.502	.250	.030	.376	.027	.304	.240	.047-078	.350	2.33
MS9382-05	.415	.398	.533	.281	.030	.376	.030	.372	.302	.047-078	.415	3.05
MS9382-06	.470	.398	.564	.312	.030	.376	.030	.435	.365	.047-078	.470	3.64
MS9382-07	.535	.398	.622	.344	.030	.403	.034	.506	.428	.047-078	.535	5.54
MS9382-08	.650	.489	.705	.406	.030	.432	.035	.569	.489	.047-078	.650	9.20
MS9382-09	.710	.489	.748	.438	.030	.451	.038	.637	.551	.047-078	.710	11.25
MS9382-10	.765	.585	.799	.469	.030	.479	.039	.702	.614	.047-078	.765	12.97
MS9382-11	.870	.663	.892	.531	.030	.510	.041	.768	.677	.047-078	.870	19.20
MS9382-12	.935	.663	.923	.562	.030	.510	.041	.830	.739	.047-078	.935	21.46
MS9382-14	1.055	.710	.986	.625	.030	.510	.041	.955	.864	.047-078	1.055	27.03
MS9382-16	1.185	.720	1.041	.688	.030	.510	.045	1.089	.989	.078-.109	1.185	33.13
MS9382-18	1.365	.767	1.126	.781	.030	.510	.045	1.213	1.114	.078-.109	1.365	49.28
MS9382-20	1.495	.767	1.189	.844	.030	.510	.050	1.348	1.239	.078-.109	1.495	61.99
MS9382-24	1.745	.889	1.306	.969	.030	.510	.059	1.612	1.484	.078-.109	1.745	104.32
MS9382-28	2.120	1.017	1.485	1.156	.044	.510	.069	1.882	1.734	.078-.109	2.120	146.78
MS9382-32	2.370	1.142	1.602	1.281	.044	.510	.083	2.161	1.984	.078-.109	2.370	189.18
MS9382-40	2.870	.918	1.852	1.531	.044	.510	.083	2.661	2.484	.094-.125	2.870	242.80
MS9382-48	3.370	.996	2.102	1.781	.044	.510	.088	3.171	2.984	.094-.125	3.370	327.65

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:16Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Navy - AS
Air Force - 11

Review activity:
DLA - CC

Preparing activity:
Navy - AS

(Project 4730-2016-064)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:16Z
Check the source to verify that this is the current version before use.